
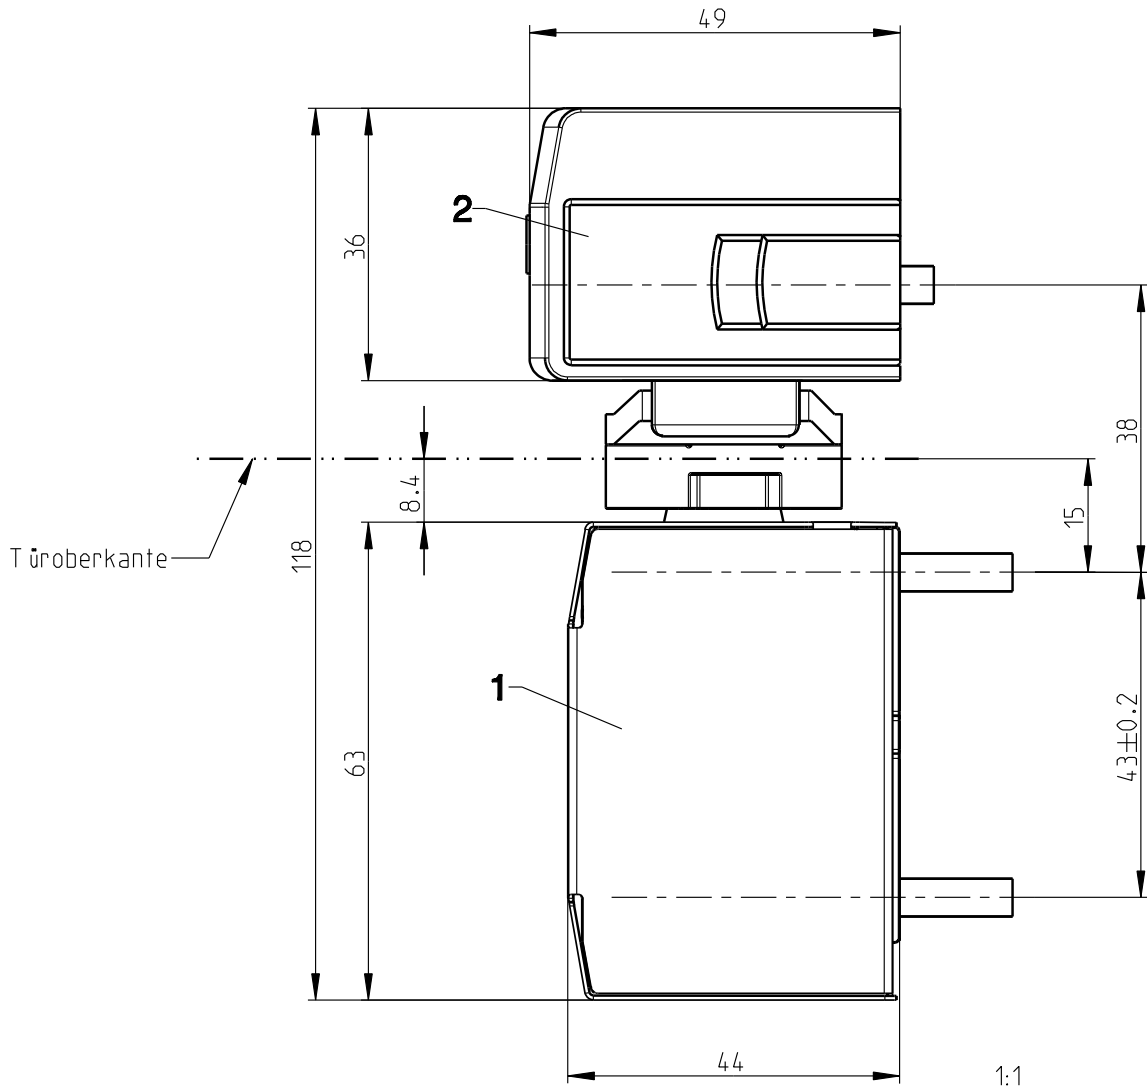


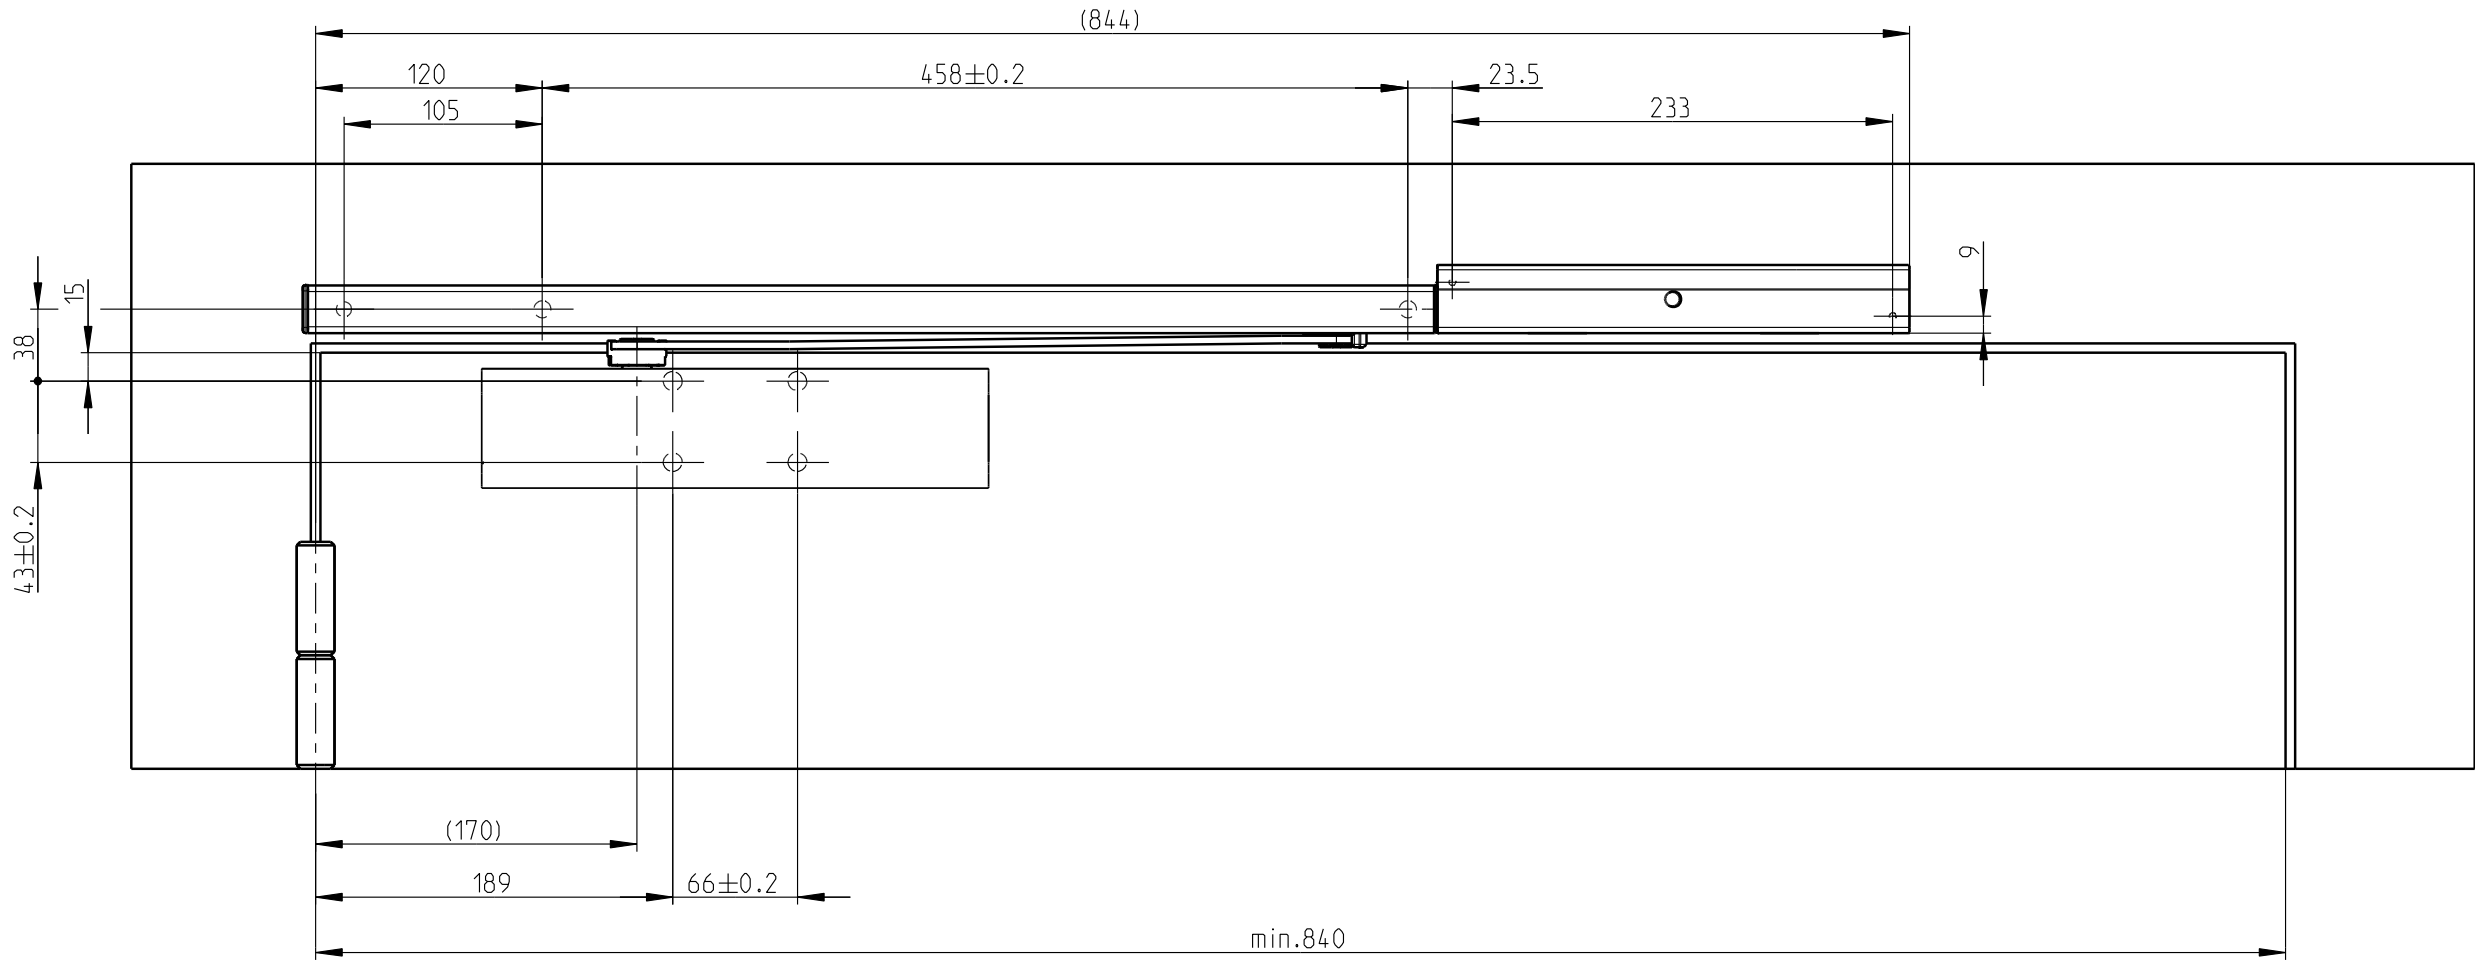

Beachte:
Für eine sichere Befestigung ist der Fachbetrieb
bzw. der Monteur verantwortlich.
Bei Brandschutztüren sind die entsprechenden
Vorschriften und Zulassungen zu beachten.


DIN links gezeichnet
DIN rechts spiegelbildlich

Pos.	Benennung	Art.-Nr.	St.	Montageanl.
1	OTS 733 + AD	K-18496	1	0-46540
	OTS 735 + AD	K-18498		0-45969
	OTS 736 + AD	K-18500		
2	GS FER-OTS 73x	K-18353	1	0-46006, 0-46838
	Bohrlehre	K-18937		

Description


OTS 73x + GS FER-OTS 73x
Normalmontage Bandseite
Profil: Neutral

	Release No.	Level	Released		Scale	Modification	Size
	--	Ver.	--	W i	%	1	3
	Mod. No. G30136	Draft	29.01.2015	Se		Drawing No.	Sheet
	Replacement for --					0-47033-PH-0-0	

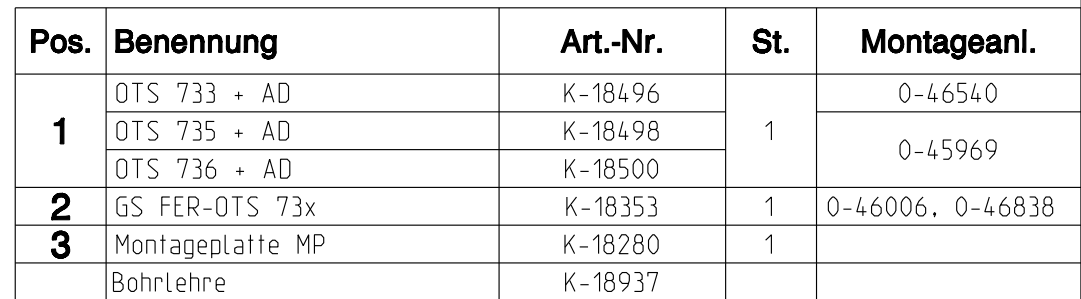


OTS 73x + GS FER-OTS 73x
Normalmontage Bandseite, mit Montageplatte
Profil: Neutral

	Release No.	Level	Released		Scale	Modification	Size
	--				%	1	3
	Mod. No.	Ver.	--	W i			
	G30136	Draft	29.01.2015	Se	Drawing No.	Sheet	
Replacement for --					0-47033-PH-0-0		2/4

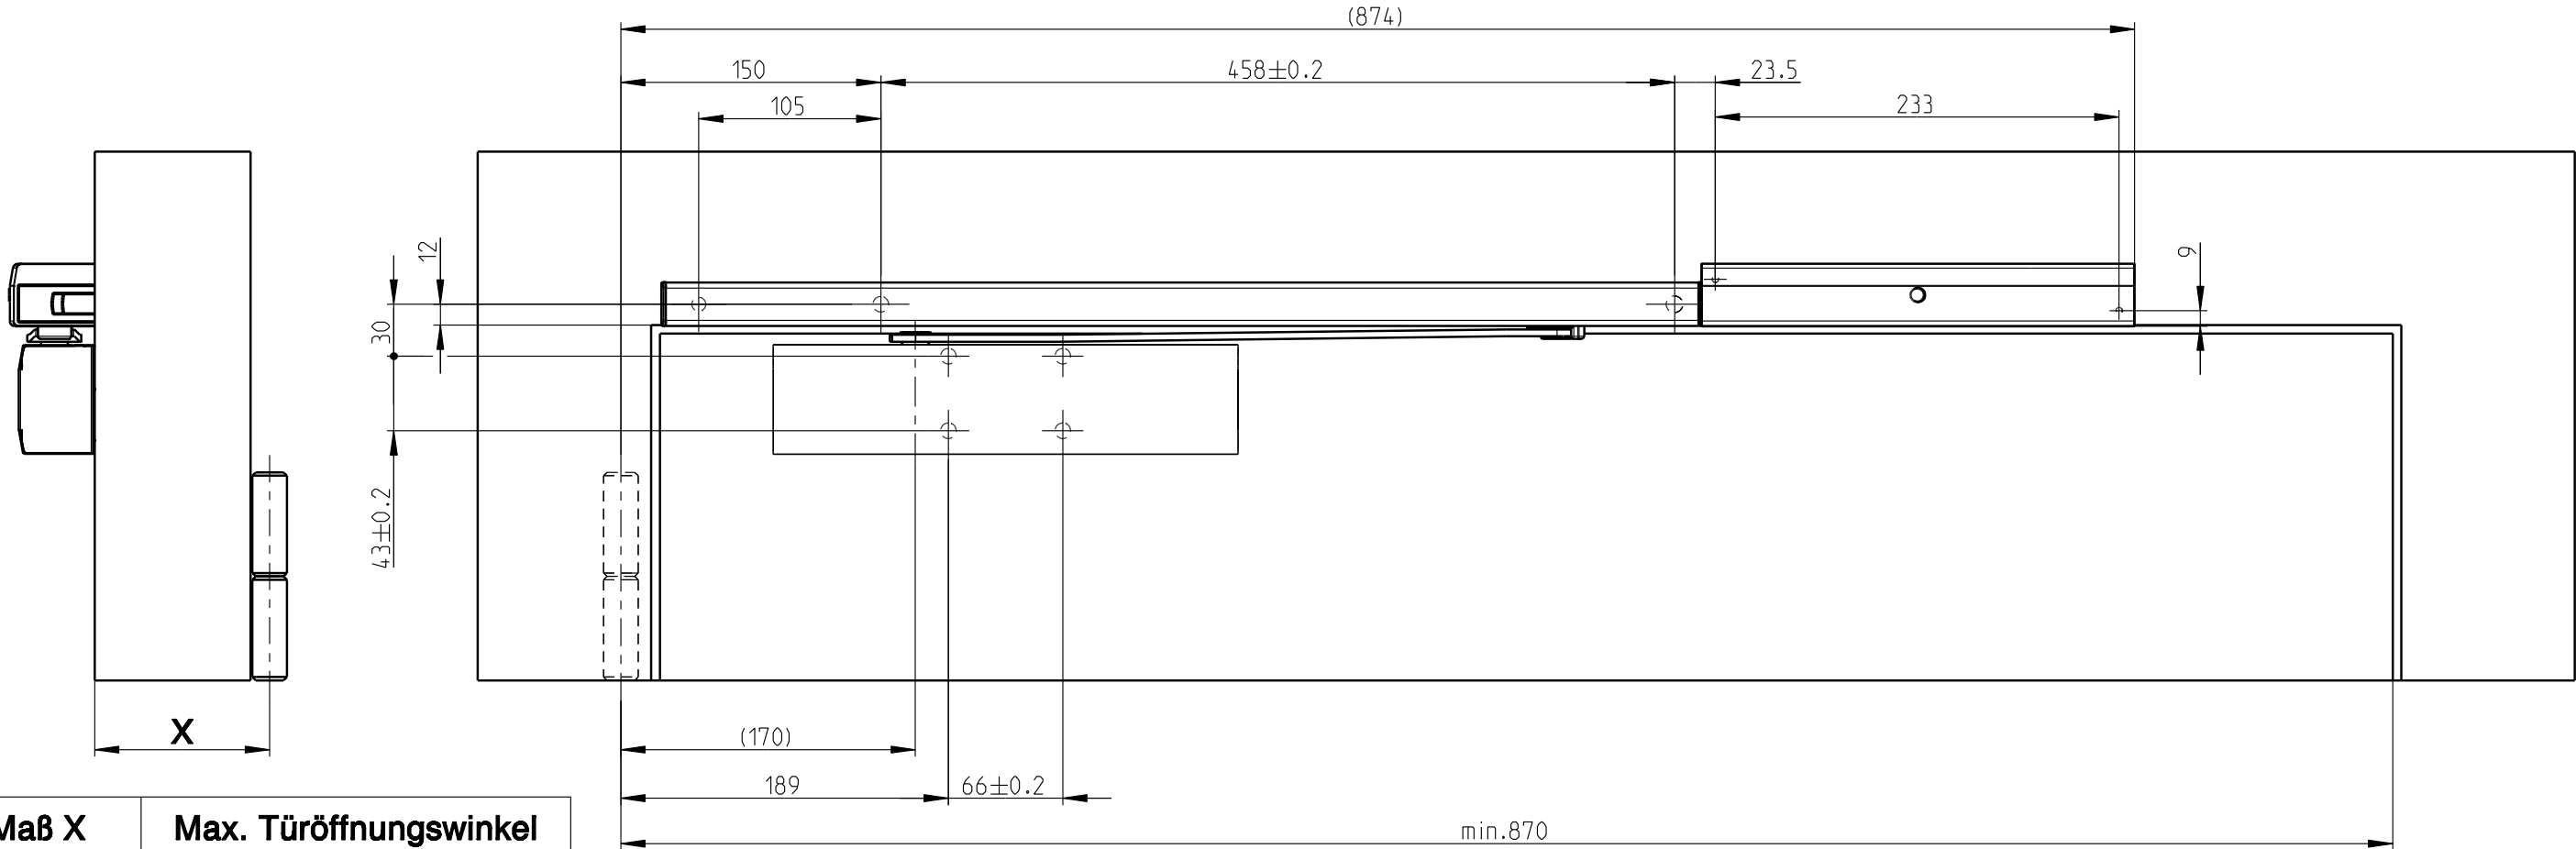

Maß X	Max. Türöffnungswinkel
70 mm	123 °
80 mm	120 °
90 mm	116 °
100 mm	112 °
110 mm	109 °

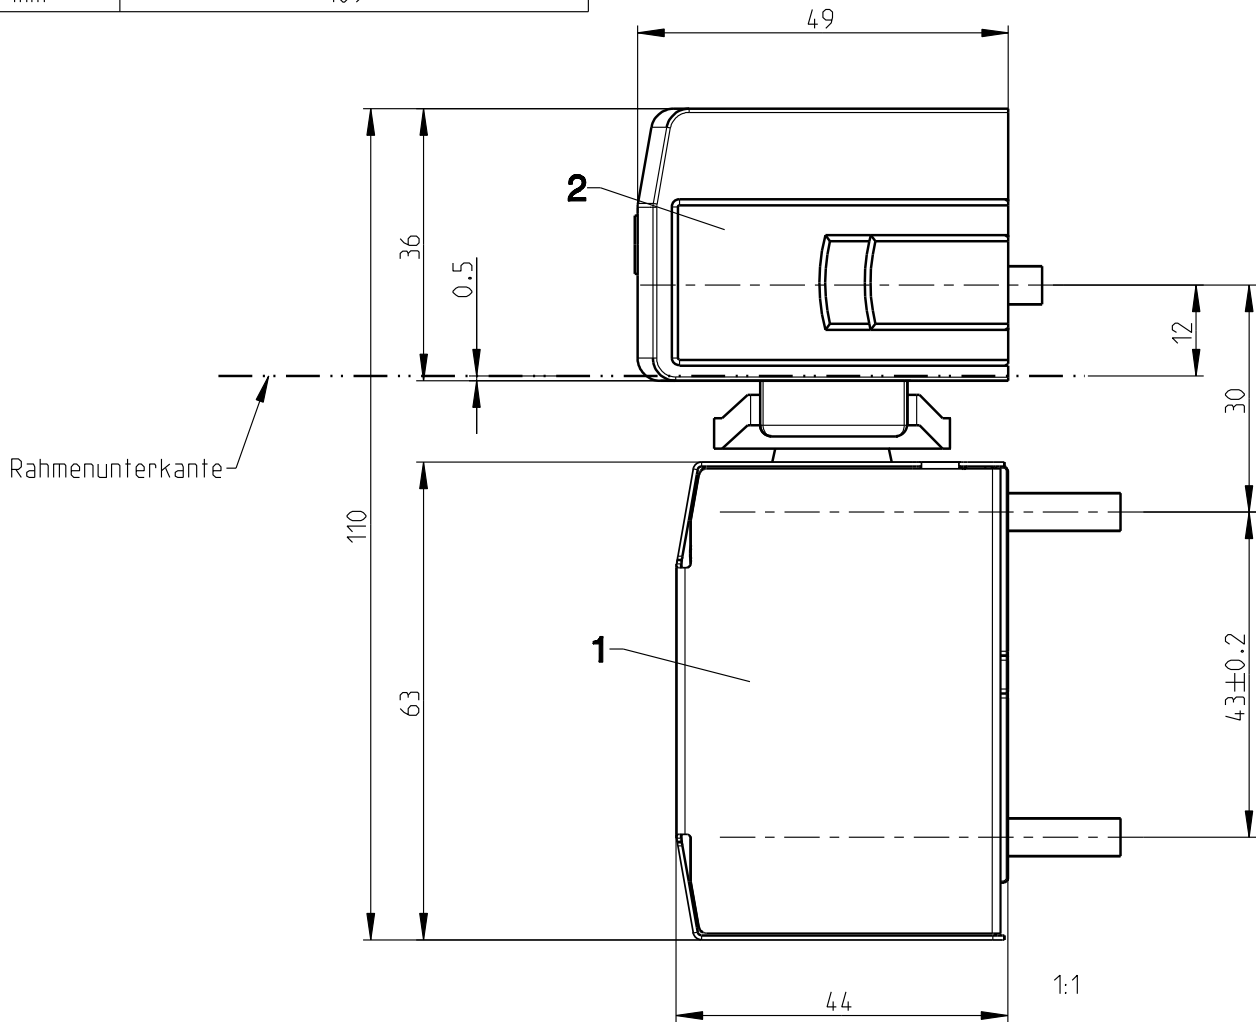

Hinweis:
Vor max. Türöffnungswinkel muss bauseits ein Türstopper gesetzt werden.

Beachte:
Für eine sichere Befestigung ist der Fachbetrieb bzw. der Monteur verantwortlich.
Bei Brandschutztüren sind die entsprechenden Vorschriften und Zulassungen zu beachten.

DIN links gezeichnet
DIN rechts spiegelbildlich

Pos.	Benennung	Art.-Nr.	St.	Montageanl.
1	OTS 733 BG + AD	K-18497	1	0-46541
	OTS 735 BG + AD	K-18499		0-45979
	OTS 736 BG + AD	K-18501		
2	GS FER-OTS 73x	K-18353	1	0-46006, 0-46838
	Bohrlehre	K-18937		

Description						
OTS 73x BG + GS FER-OTS 73x Normalmontage Bandgegenseite Profil: Neutral						
GU	Release No.	Level	Released		Scale	Size
	--	Ver.	--	W i	%	3
	Mod. No. G30136	Draft	29.01.2015	Se		Sheet
	Replacement for --				Drawing No. 0-47033-PH-0-0	3/4


Pos.	Benennung	Art.-Nr.	St.	Montageanl.
1	OTS 733 BG + AD	K-18497	1	0-46541
	OTS 735 BG + AD	K-18499		0-45979
	OTS 736 BG + AD	K-18501		
2	GS FER-OTS 73x	K-18353	1	0-46006, 0-46838
3	Montageplatte MP	K-18280	1	
	Bohrlehre	K-18937		

Release No. --	Level	Released		Scale %	Modification 1	Size 3
Mod. No. G30136	Ver.	--	W i		Drawing No. 0-47033-PH-0-0	Sheet 4 / 4
Replacement for --						


Hinweis:
Vor max. Türöffnungswinkel muss bauseits
ein Türstopper gesetzt werden.
* weitere / alternative Befestigungsmöglichkeit.



Beachte:
Für eine sichere Befestigung ist der Fachbetrieb
bzw. der Monteur verantwortlich.
Bei Brandschutzfüßen sind die entsprechenden
Vorschriften und Zulassungen zu beachten.

DIN links gezeichnet
DIN rechts spiegelbildlich

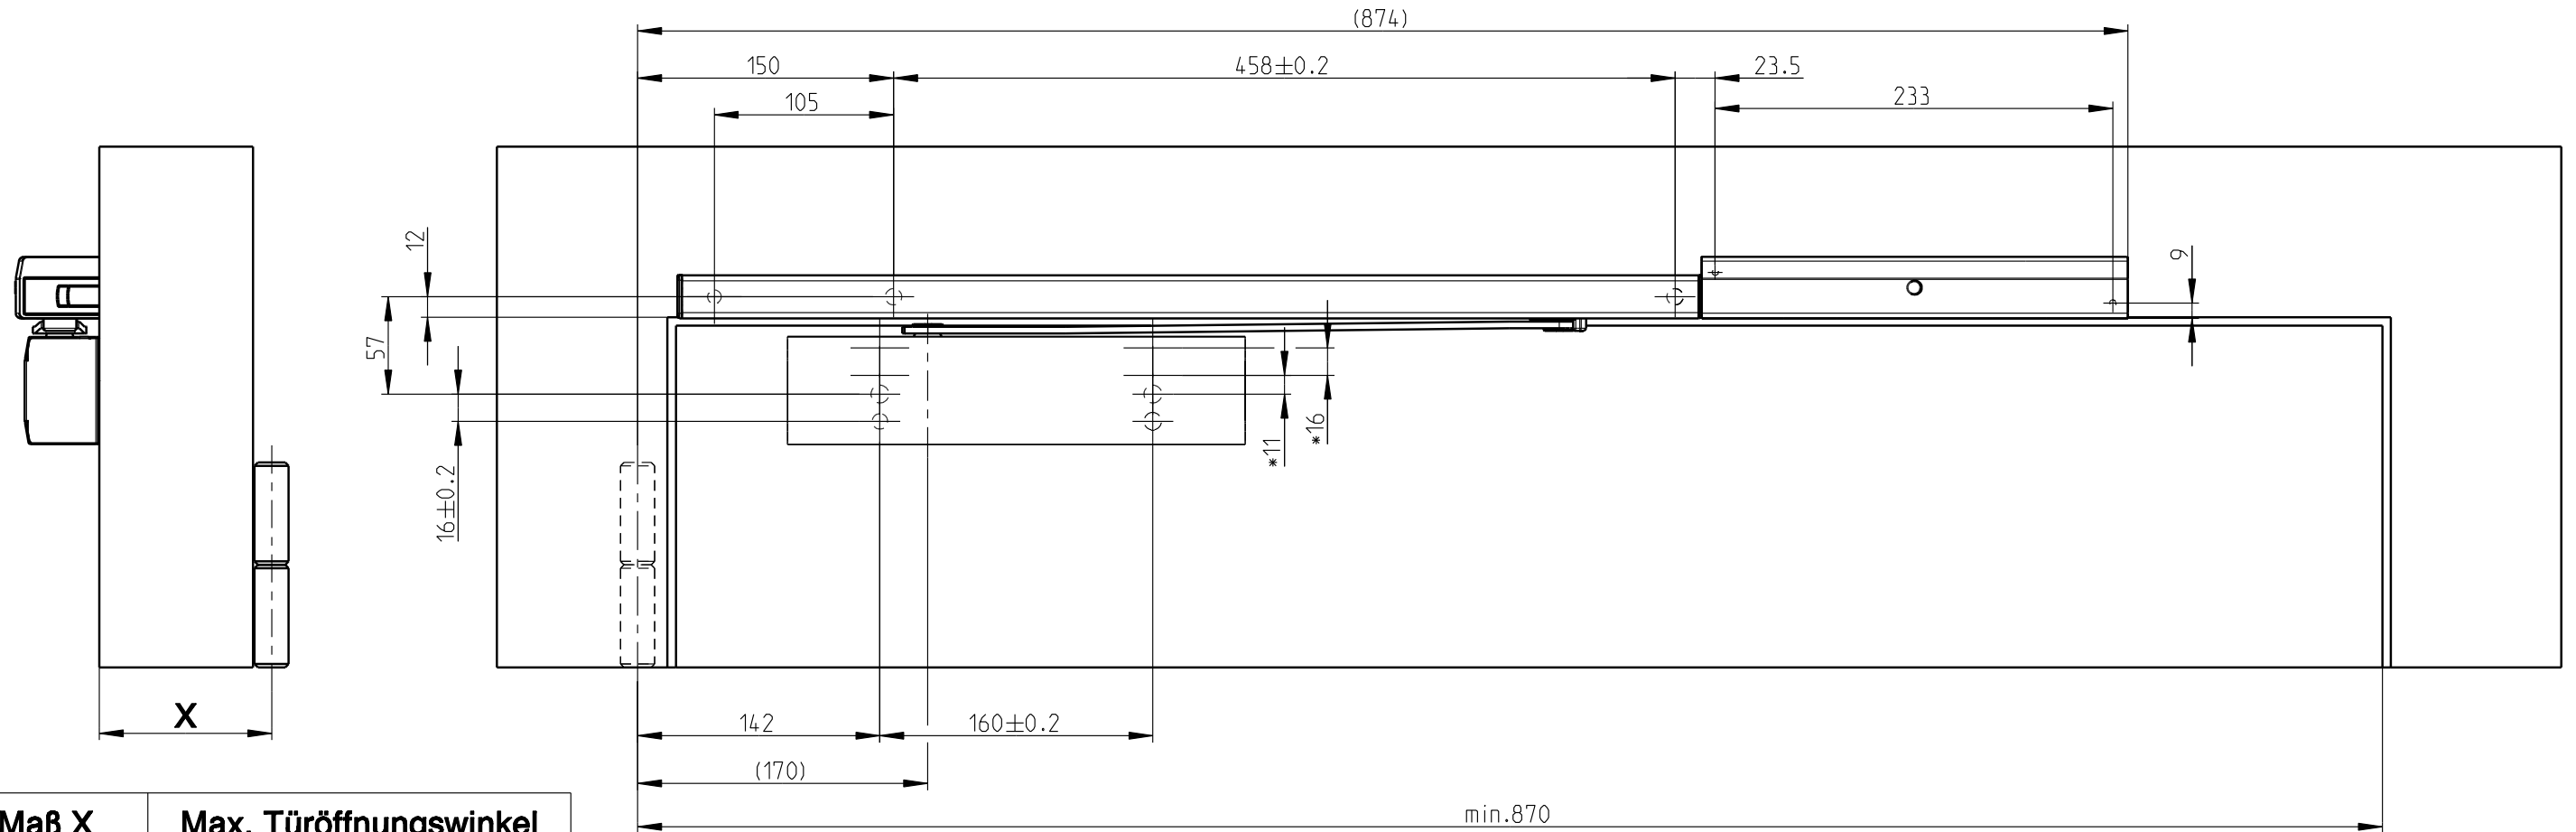

Maß X	Max. Türöffnungswinkel
70 mm	123 °
80 mm	120 °
90 mm	116 °
100 mm	112 °
110 mm	109 °

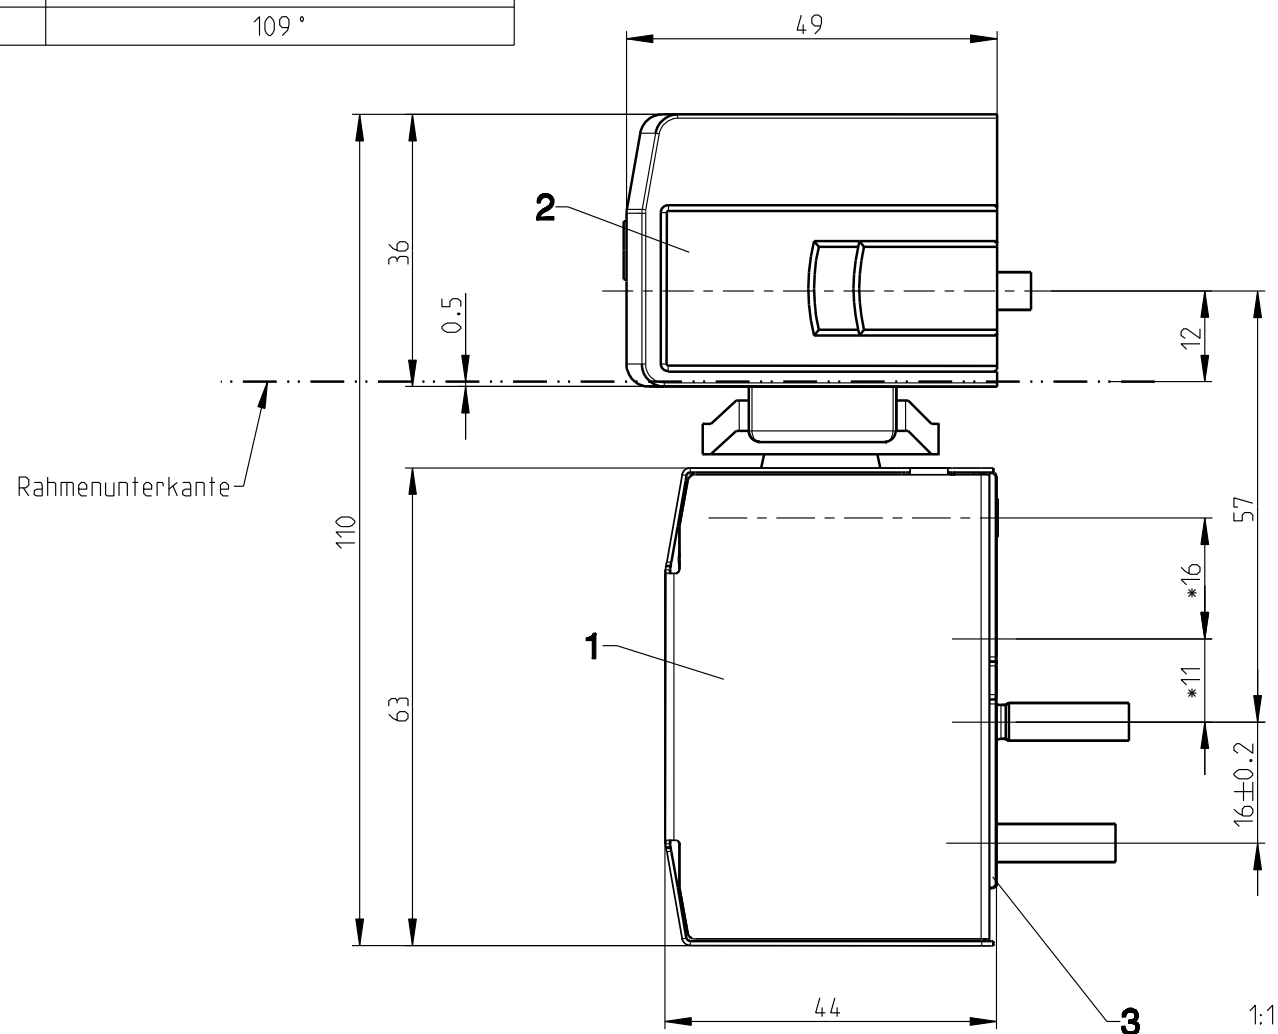

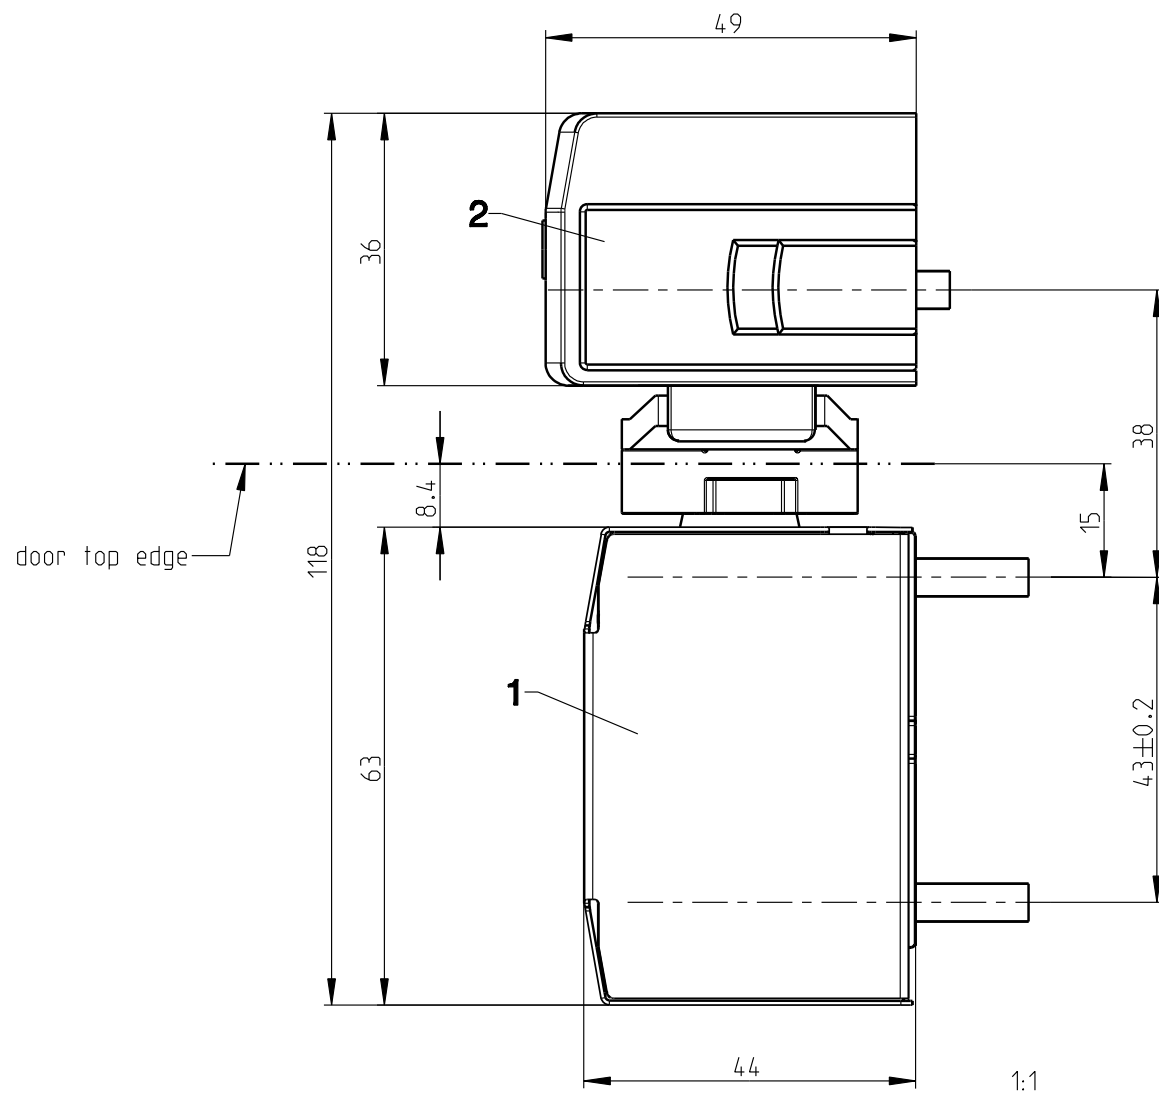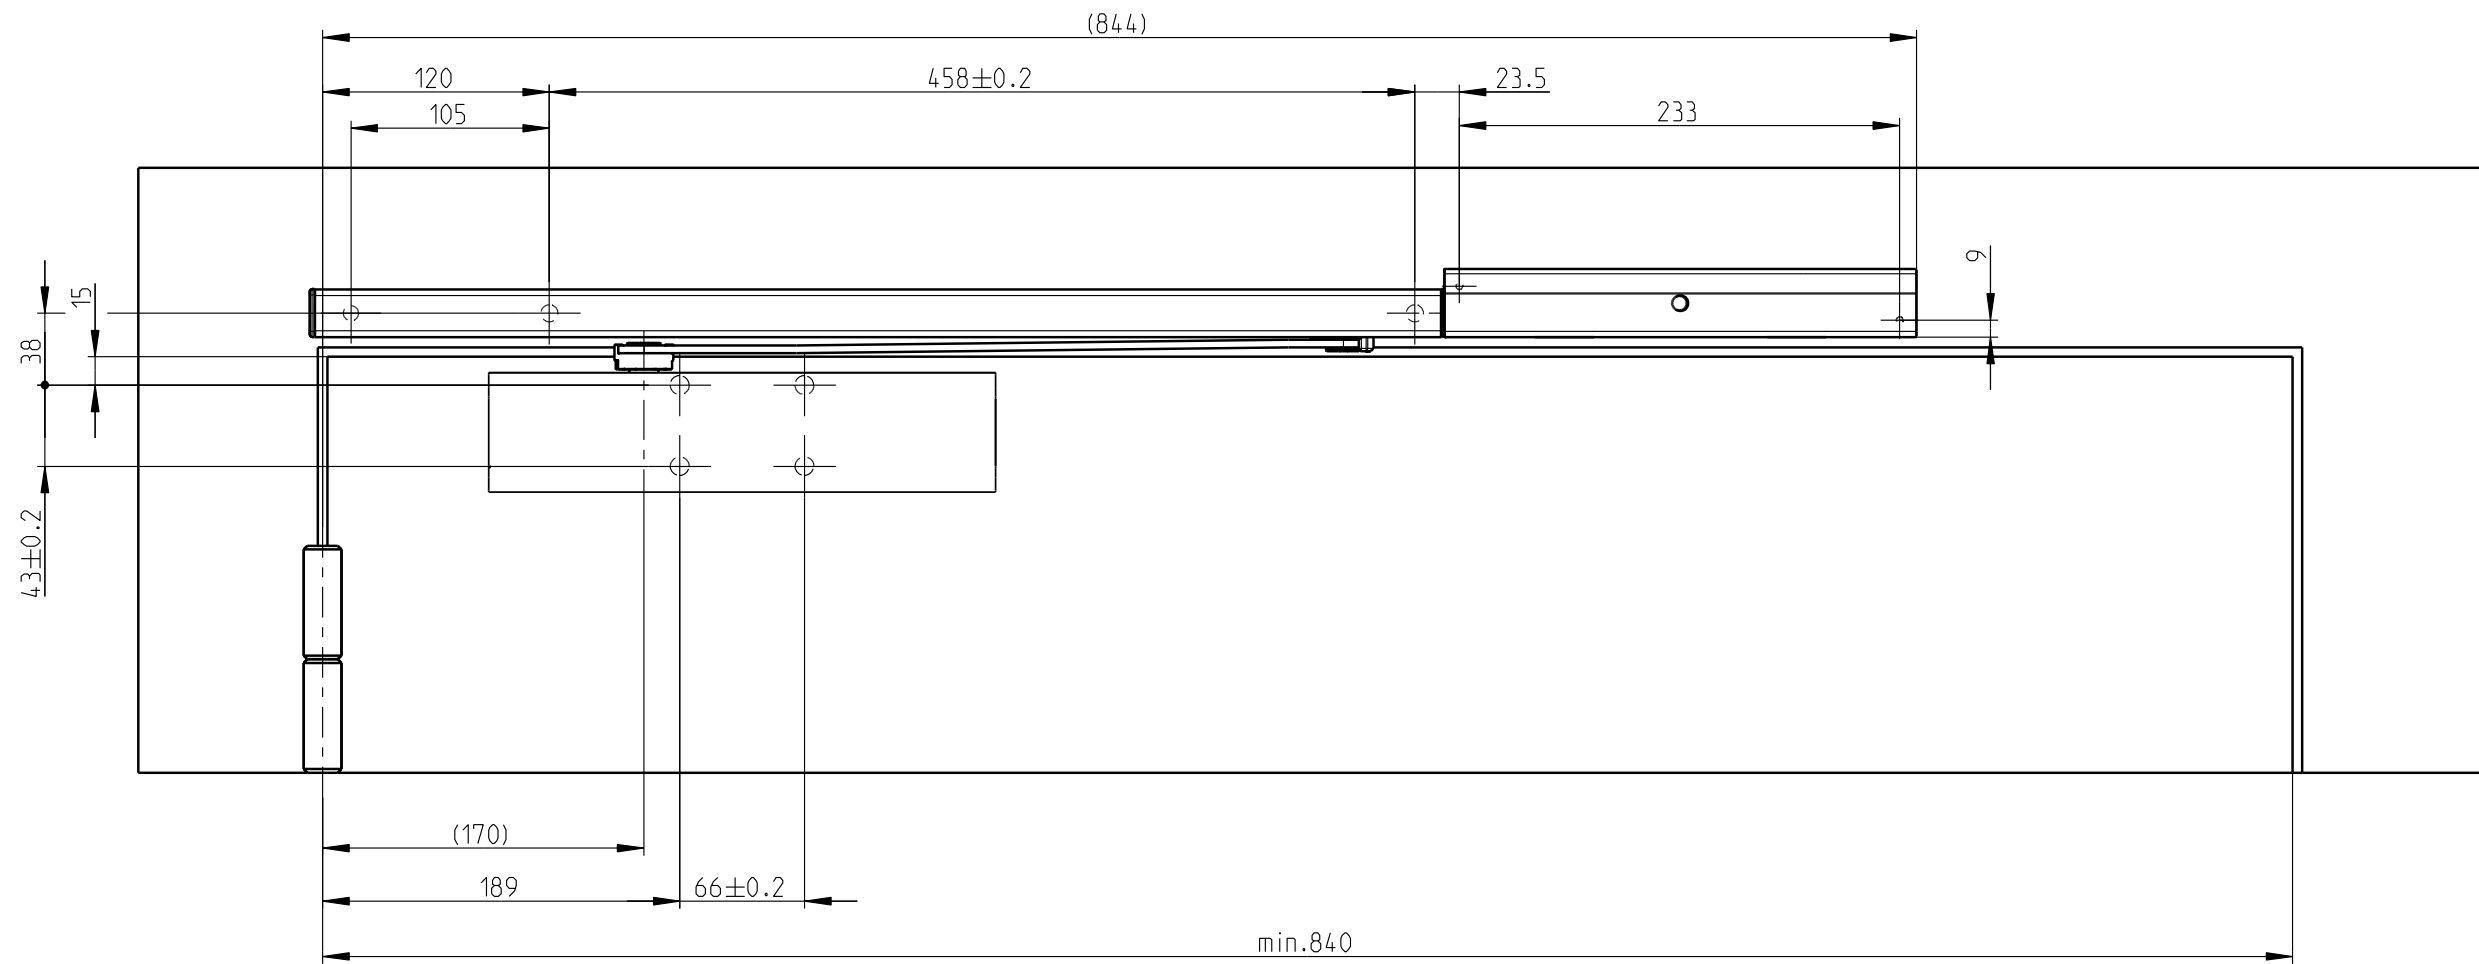

Notice:
The installer is responsible for the secure fastening of the door closer. If mounted on fire doors, the appropriate directives and approvals must be observed.



DIN lh is illustrated
DIN rh laterally reversed

Item	Description	Art.-no.	Qty.	Assembly inst.
1	OTS 733 + cover	K-18496	1	0-46540
	OTS 735 + cover	K-18498		0-45969
	OTS 736 + cover	K-18500		
2	GS FER-OTS 73x	K-18353	1	0-46006, 0-46838
	Drilling jig	K-18937		

Description

OTS 73x + GS FER-OTS 73x
Standard mounting on hinge side
Profile: neutral

	Release No.	Level	Released		Scale	Modification	Size
	--	Ver.	--	W i	%	1	3
	Mod. No. G30136	Draft	29.01.2015	Se		Drawing No.	Sheet
	Replacement for --					0-47033-PH-0-EN	1/4

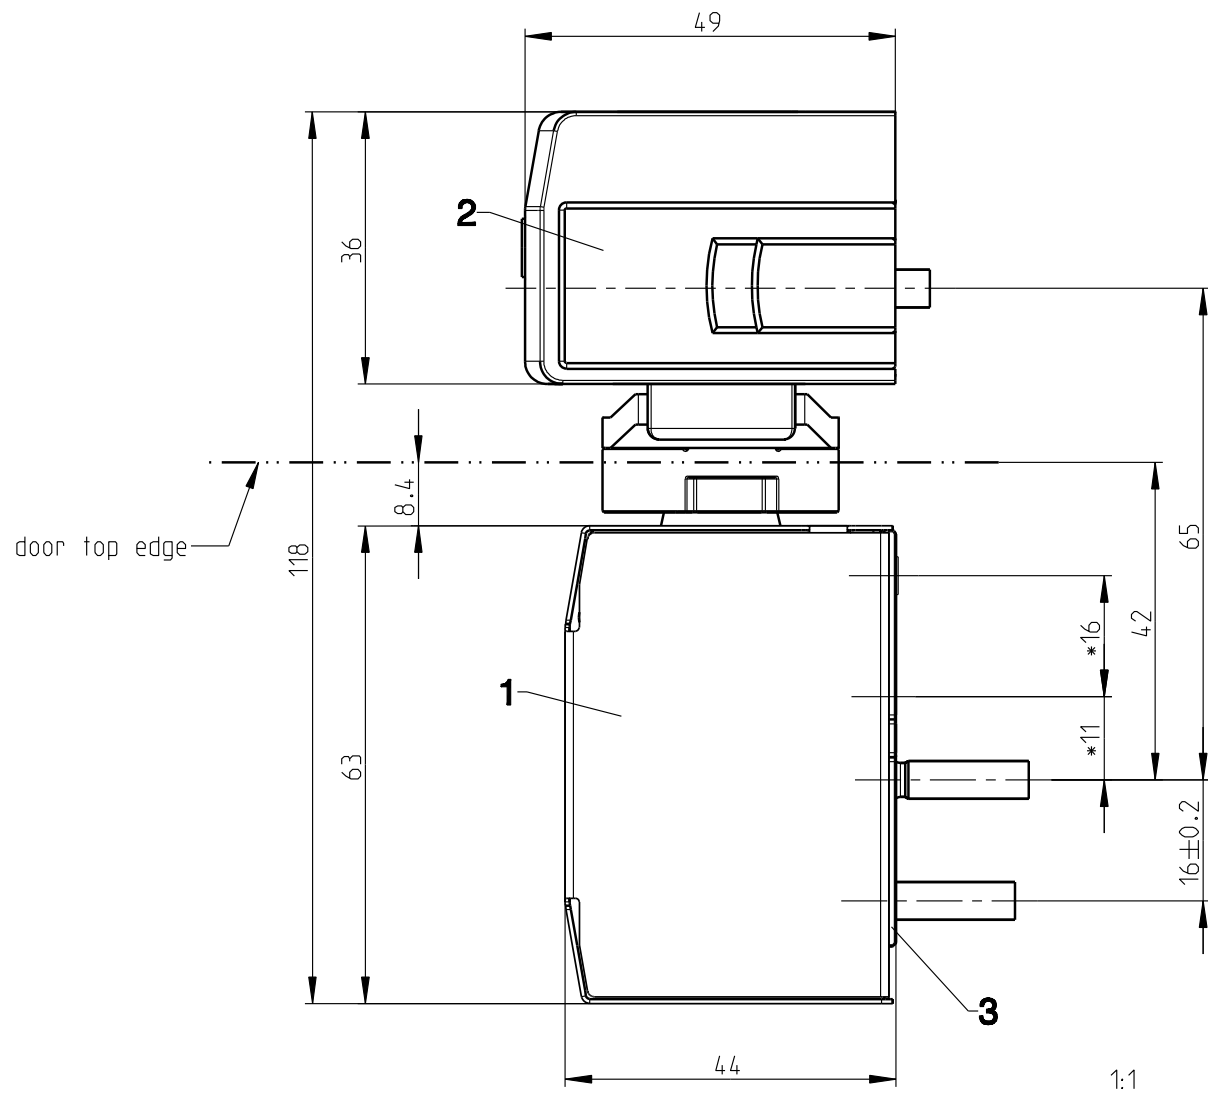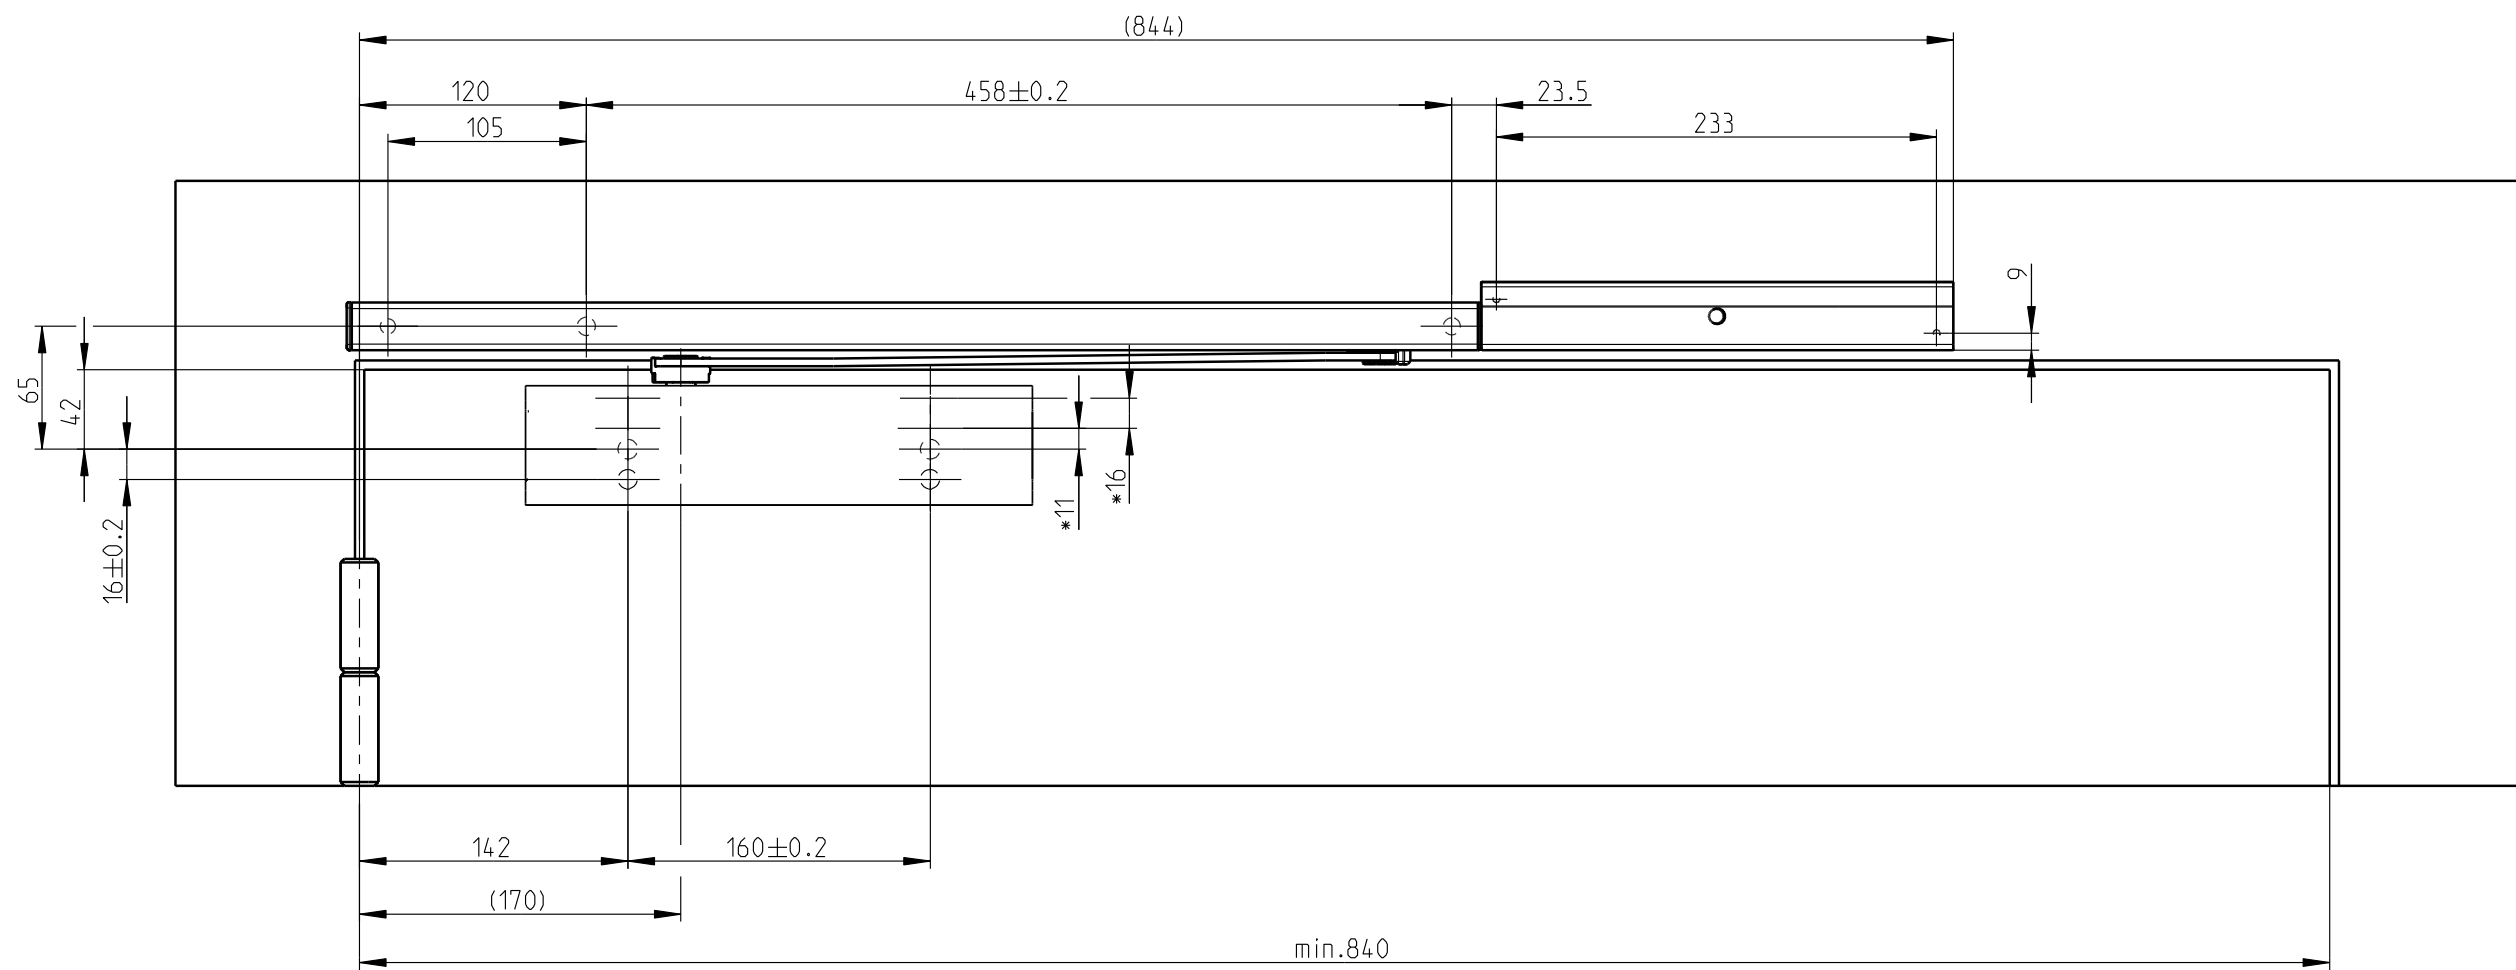

Indication:
* alternative fixing points

Notice:
The installer is responsible for the secure fastening of the door closer. If mounted on fire doors, the appropriate directives and approvals must be observed.


DIN lh is illustrated
DIN rh laterally reversed

Item	Description	Art.-no.	Qty.	Assembly inst.
1	OTS 733 + cover	K-18496	1	0-46540
	OTS 735 + cover	K-18498		0-45969
	OTS 736 + cover	K-18500		
2	GS FER-OTS 73x	K-18353	1	0-46006, 0-46838
3	Mounting plate MP	K-18280	1	
	Drilling jig	K-18937		


Description

OTS 73x + GS FER-OTS 73x
Standard mounting on hinge side, with mounting plate
Profile: neutral

	Release No.	Level	Released		Scale	Modification	Size
	--	Ver.	--	W i	%	1	3
	Mod. No.	Draft	29.01.2015	Se		Drawing No.	Sheet
	G30136					0-47032-PH-0-EN	2/4
	Replacement for --						

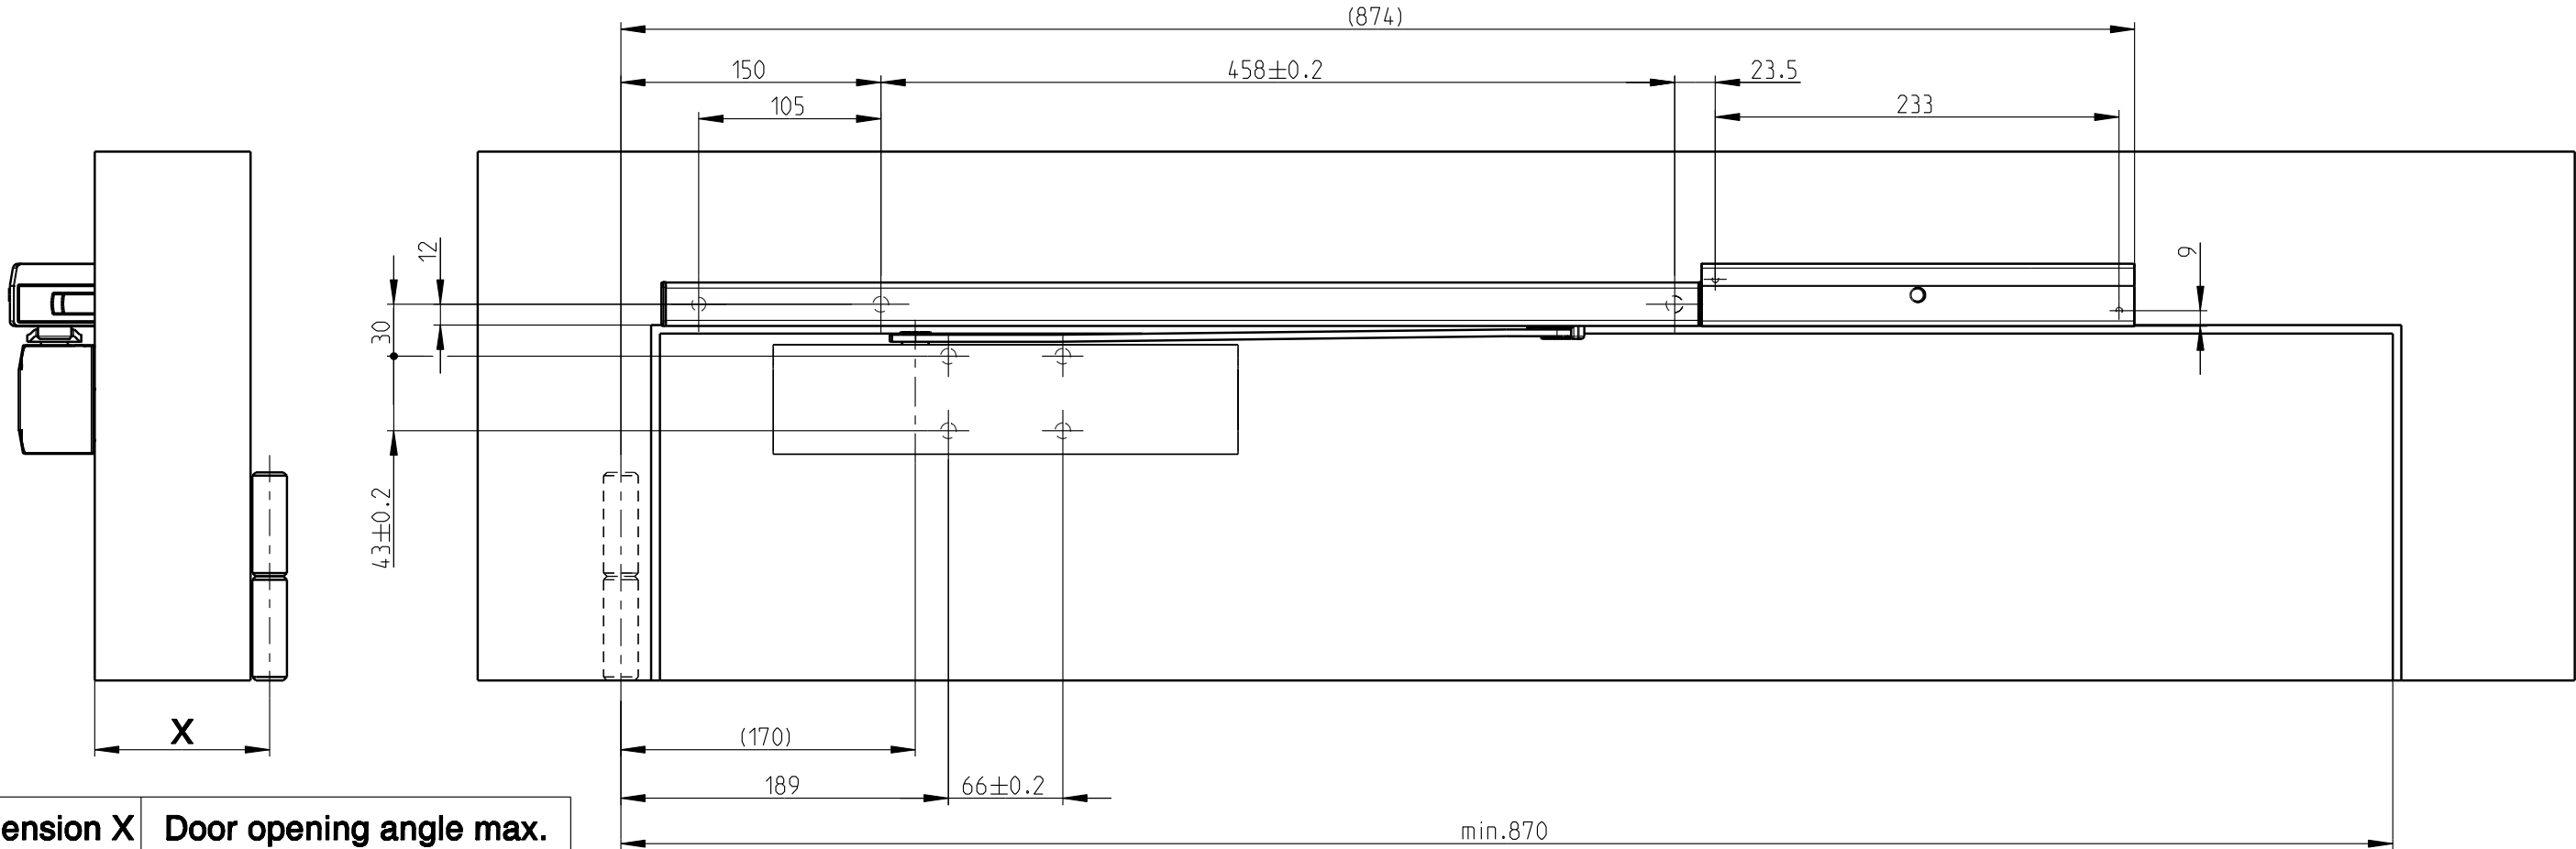

Dimension X	Door opening angle max.
70 mm	123 °
80 mm	120 °
90 mm	116 °
100 mm	112 °
110 mm	109 °

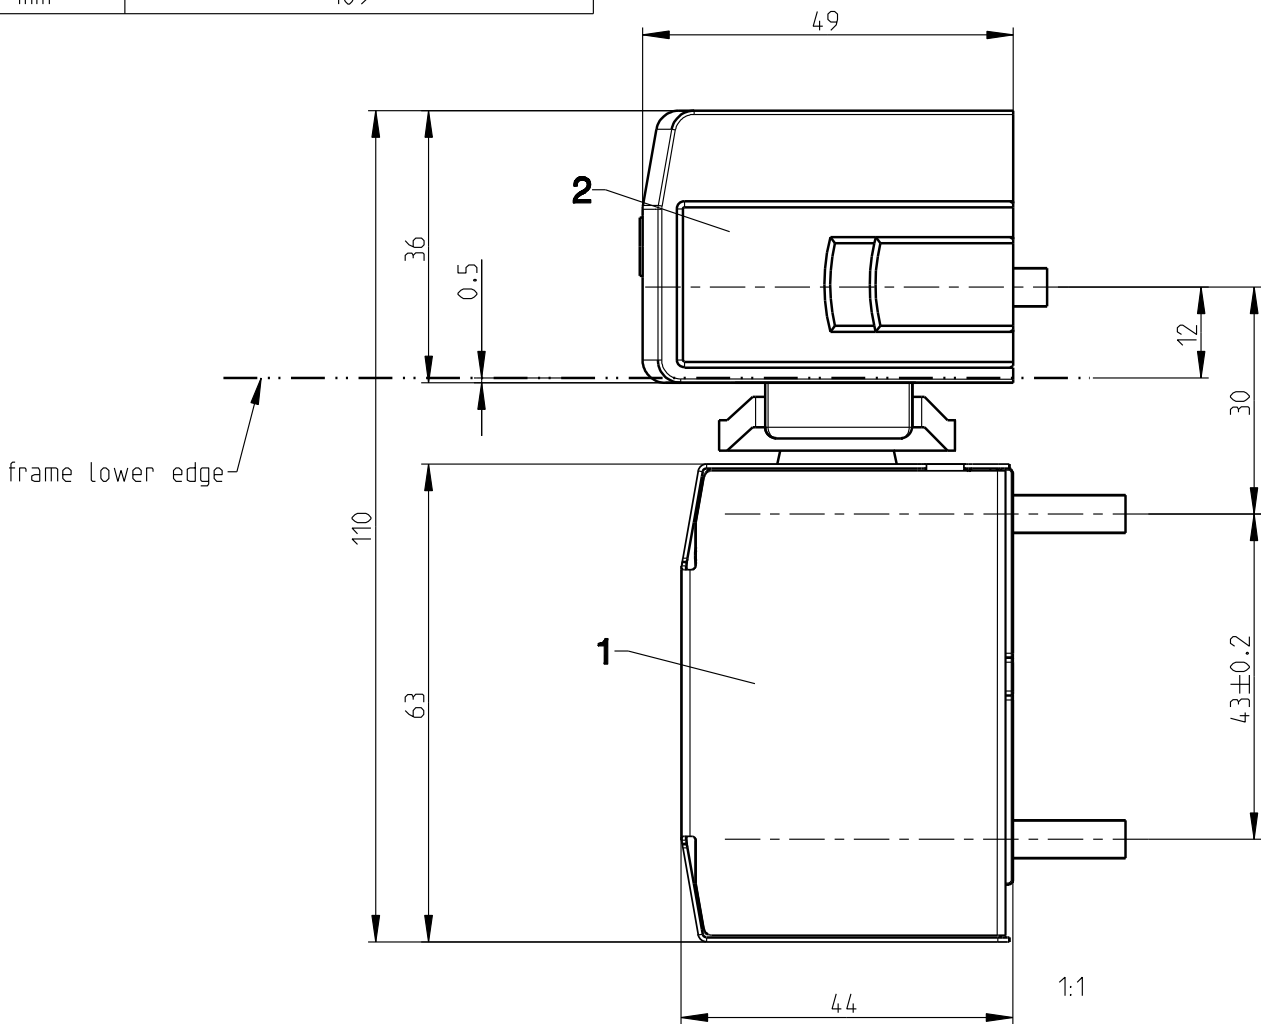

Indication:
Use door stop for max. door opening angle.

Notice:
The installer is responsible for the secure fastening of the door closer. If mounted on fire doors, the appropriate directives and approvals must be observed.



DIN lh is illustrated
DIN rh laterally reversed

Item	Description	Art.-no.	Qty.	Assembly inst.
1	OTS 733 BG + cover	K-18497	1	0-46541
	OTS 735 BG + cover	K-18499		0-45979
	OTS 736 BG + cover	K-18501		
2	GS FER-OTS 73x	K-18353	1	0-46006, 0-46838
	Drillling jig	K-18937		

Description

OTS 73x BG + GS FER-OTS 73x
Standard mounting opposite to hinge side
Profile: neutral

GU	Release No. --	Level	Released		Scale %	Modification		Size
	Mod. No. G30136	Ver.	--	W i		1	Drawing No. 0-47033-PH-0-EN	3
	Replacement for --	Draft	29.01.2015	Se				Sheet 3/4

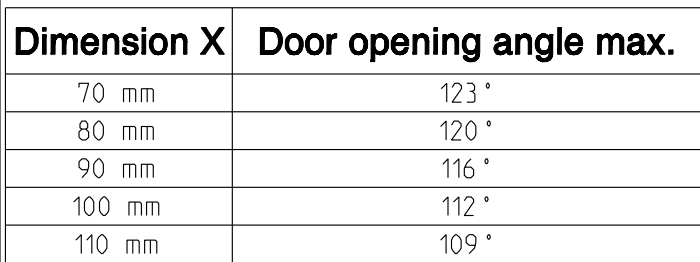

Notice:
The installer is responsible for the secure fastening of the door closer. If mounted on fire doors, the appropriate directives and approvals must be observed.

DIN lh is illustrated
DIN rh laterally reversed

Item	Description	Art.-no.	Qty.	Assembly inst.
1	OTS 733 BG + cover	K-18497	1	0-46541
	OTS 735 BG + cover	K-18499		0-45979
	OTS 736 BG + cover	K-18501		
2	GS FER-OTS 73x	K-18353	1	0-46006, 0-46838
3	Mounting plate MP	K-18280	1	
	Drillling jig	K-18937		

ID	Description	Status	Priority	Assignee	Due Date	Created At	Updated At
1	Task 1 Description	In Progress	High	John Doe	2024-10-25	2024-10-20 10:30	2024-10-24 15:45
2	Task 2 Description	On Hold	Medium	Jane Smith	2024-10-26	2024-10-21 09:15	2024-10-25 11:20
3	Task 3 Description	Not Started	Low	Mike Johnson	2024-10-27	2024-10-22 14:00	2024-10-26 16:30
4	Task 4 Description	Completed	High	Emily White	2024-10-28	2024-10-23 11:45	2024-10-27 13:10
5	Task 5 Description	In Progress	Medium	David Brown	2024-10-29	2024-10-24 08:30	2024-10-28 10:00

OTS 73x BG + GS FER-OTS 73x
Standard mounting opposite to hinge side, with mounting plate
Profile: neutral

	Release No. --	Level	Released		Scale %	Modification 1	Size 3
	Mod. No. G30136	Ver.	--	W i		Drawing No. 0-47033-PH-0-EN	Sheet 4 / 4
		Draft	29.01.2015	Se			
	Replacement for --						