
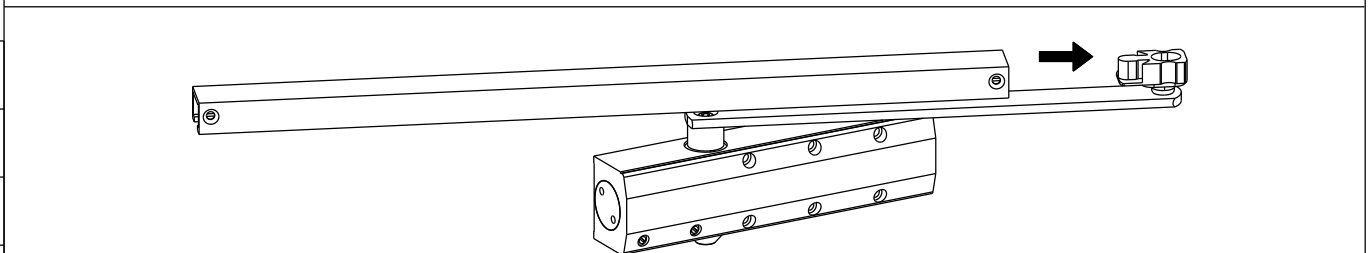
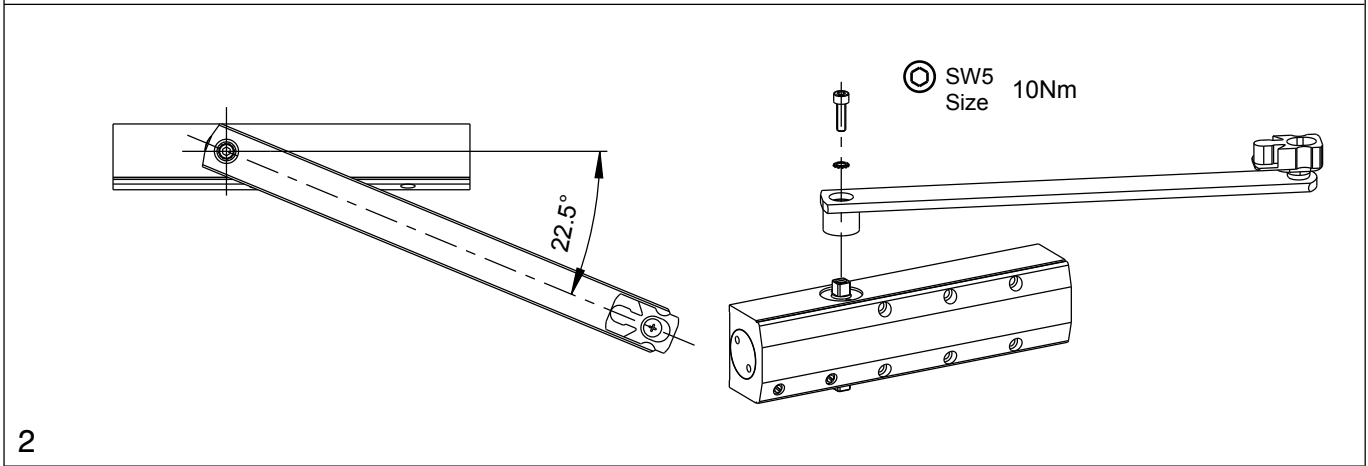
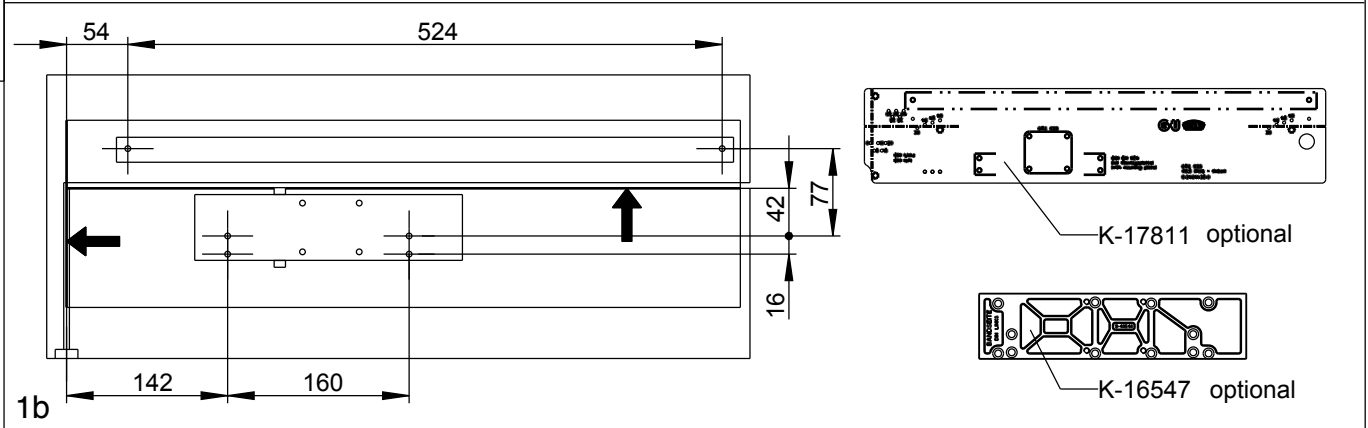


	Gretsch-Unitas GmbH Baubeschläge Johann-Maus-Str. 3 D-71254 Ditzingen	08				
			1	1	1	3
0432-CPD-0067	EN 1154:1996 + A1:2002	4	8	3	1	3
Substance: -----						

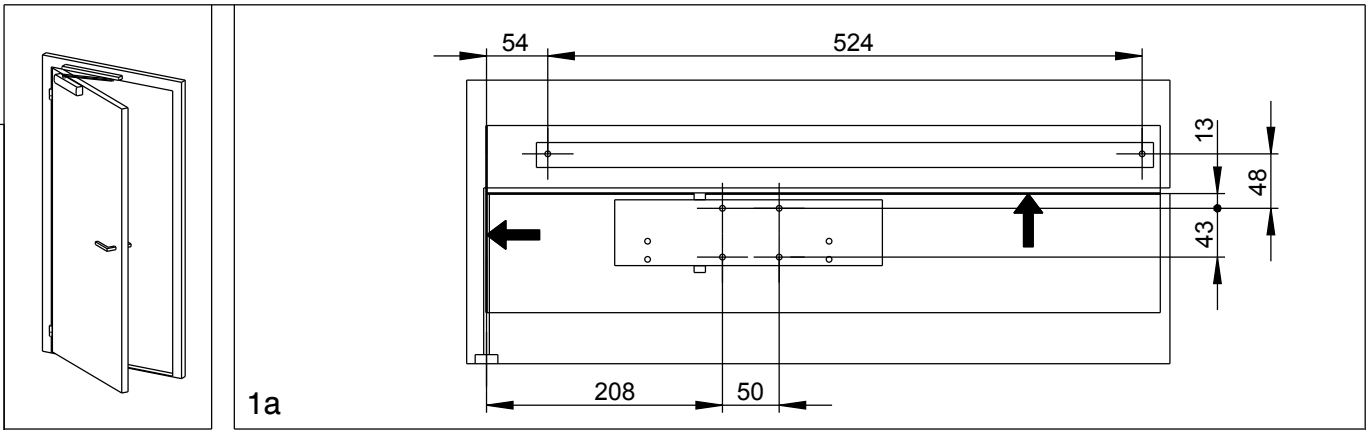

HINWEIS / NOTE

Die Produktinformation Türschließer OTS/UTS/VTS (Art.-Nr. 0-46884-P0-0-0) finden Sie auf der GU-Homepage "www.g-u.com/de/service/downloads.html".

Leistungserklärungen finden Sie auf der GU-Homepage "www.g-u.com/de/service/bauproduktenverordnung.html".

You will find the product information 0-46884-P0-0-0 "OTS/UTS/VTS -Door closer" at the GU-Homepage www.g-u.com under "SERVICES" in the menu item "Downloads".

Declarations of Performance can be found at the GU-Homepage "www.g-u.com/en/services/construction-products-regulation.html".


Description

OTS 633 Normalmontage Bandseite, DIN links K-17521


OTS 633 standard mounting on hinge side, DIN left K-17521

GU	Release No. --	Level	Released		Scale %	Modification 5	Size 4
	Mod. No. G33596	Ver.	--	Wi		Drawing No.	Sheet
	Replacement for --	Draft	15.03.2017	Se		0-44861-PL-0-0	1/12


4a

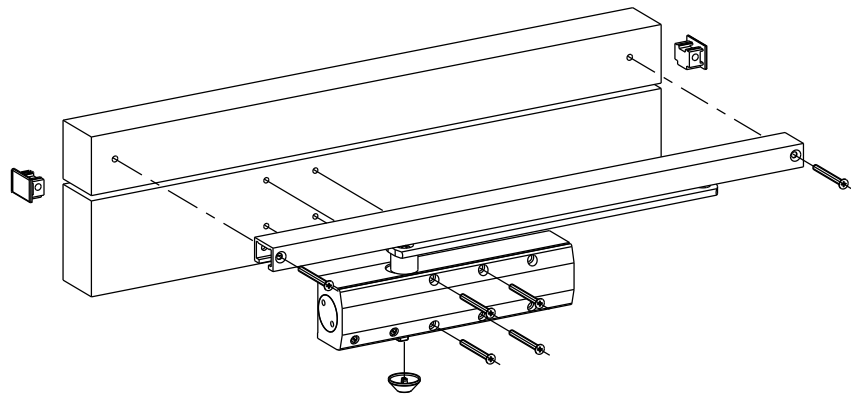


4b

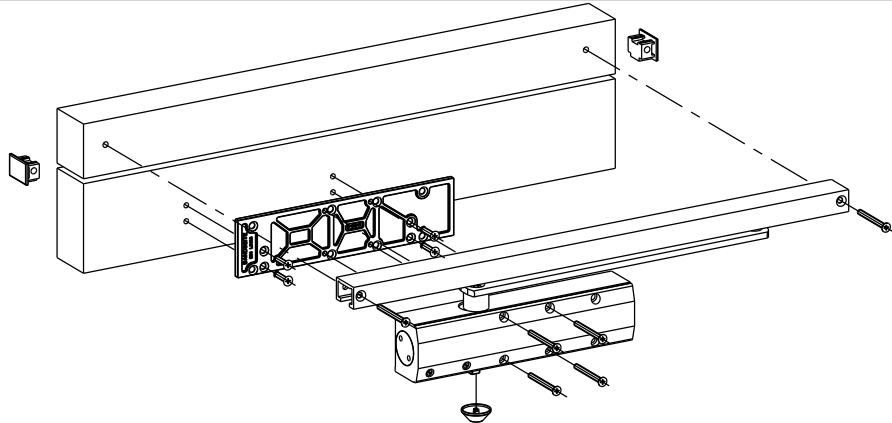

Proprietary rights apply in accordance with ISO 16016.

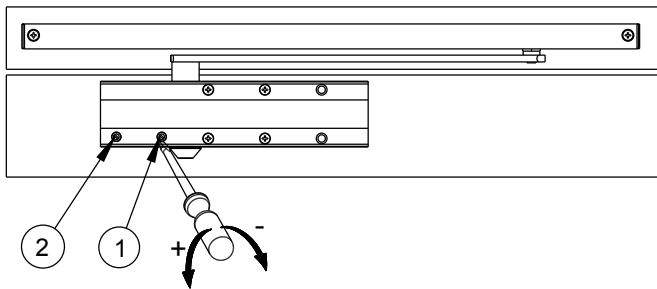

- 1 Schließgeschwindigkeit
Closing speed
- 2 Türendschlag
Latching force

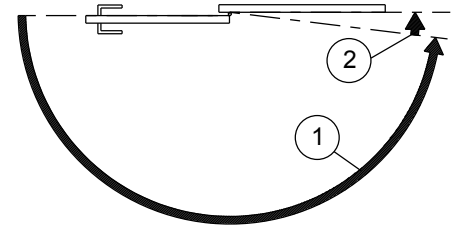

5

EN


ES

FR

--

--

6

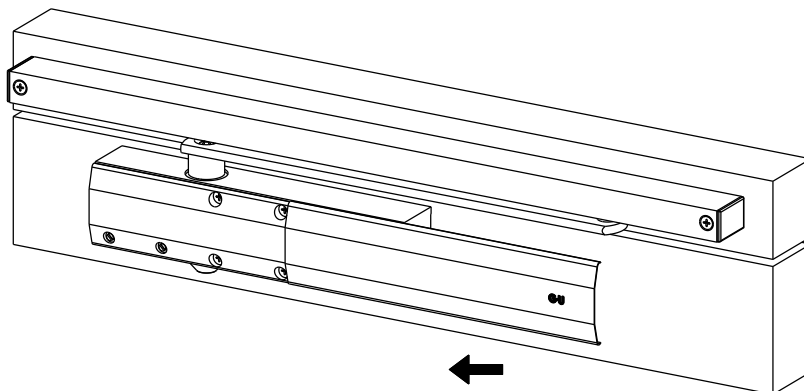

Montageanleitung /
assembly instructions

V5


Description

OTS 633 Normalmontage Bandseite, DIN links K-17521


--
OTS 633 standard mounting on hinge side, DIN left K-17521

	Release No. --	Level	Released		Scale %	Modification 5	Size 4
	Mod. No. G33596	Ver.	--	Wi			
	Replacement for --	Draft	15.03.2017	Se		Drawing No. 0-44861-PL-0-0	Sheet 2/12



	Gretsch-Unitas GmbH Baubeschläge Johann-Maier-Str. 3 D-71254 Ditzingen					08				
	0432-CPD-0067					EN 1154:1996 + A1:2002				
						4				
						8				
						3				
Substance: -----					1					
					1					
					3					




1a

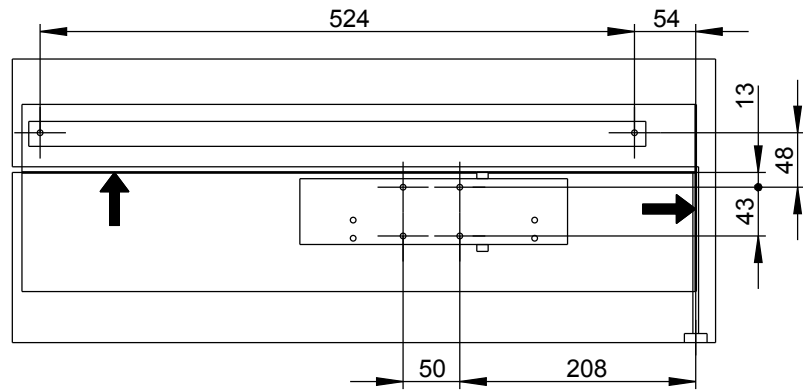

1b

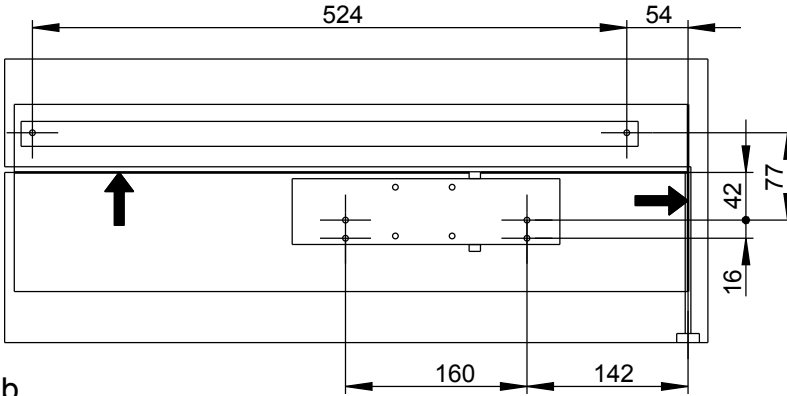


K-17811 optional




K-16547 optional

Proprietary rights apply in accordance with ISO 16016.

2

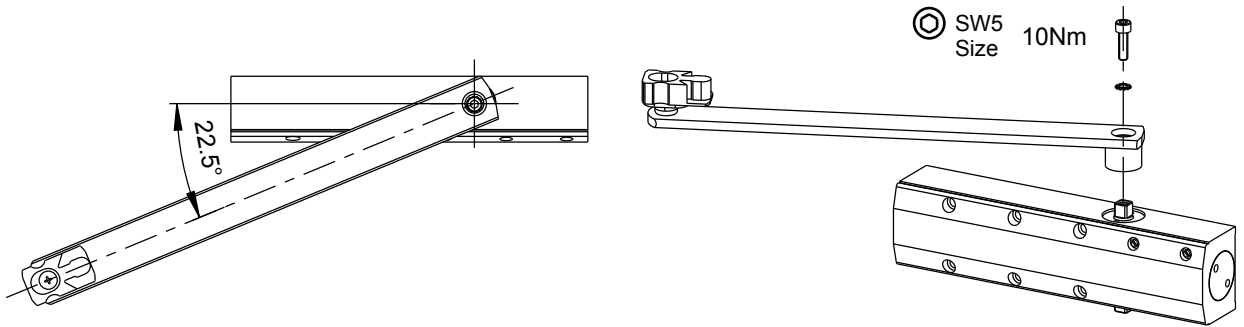

3

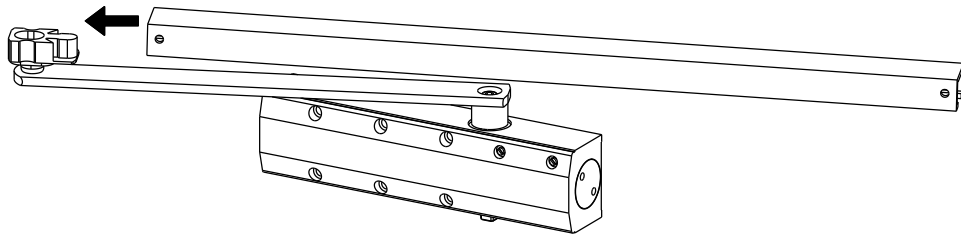

Description

OTS 633 Normalmontage Bandseite, DIN rechts K-17521

-- OTS 633 standard mounting on hinge side, DIN right K-17521



Release No.
--
Mod. No.
G33596

Level
Ver.
Draft

Released
--
15.03.2017

Wi
Se

Scale
%

Modification
5
Drawing No.


0-44861-PL-0-0

Size
4
Sheet
3/12


Proprietary rights apply in accordance with ISO 16016.

- EN
- ES
- FR
-
-


Montageanleitung /
assembly instructions
V5

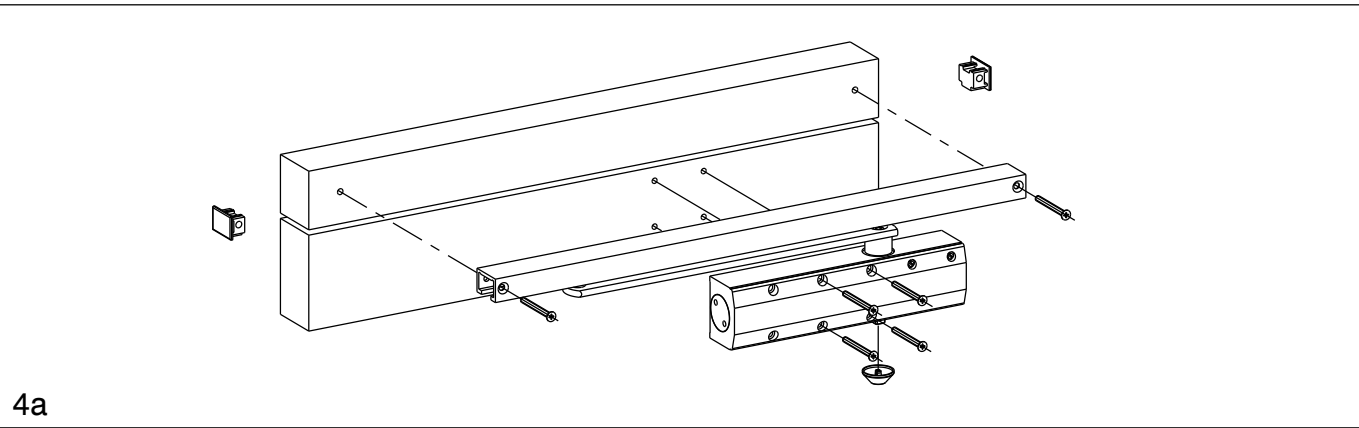


4a

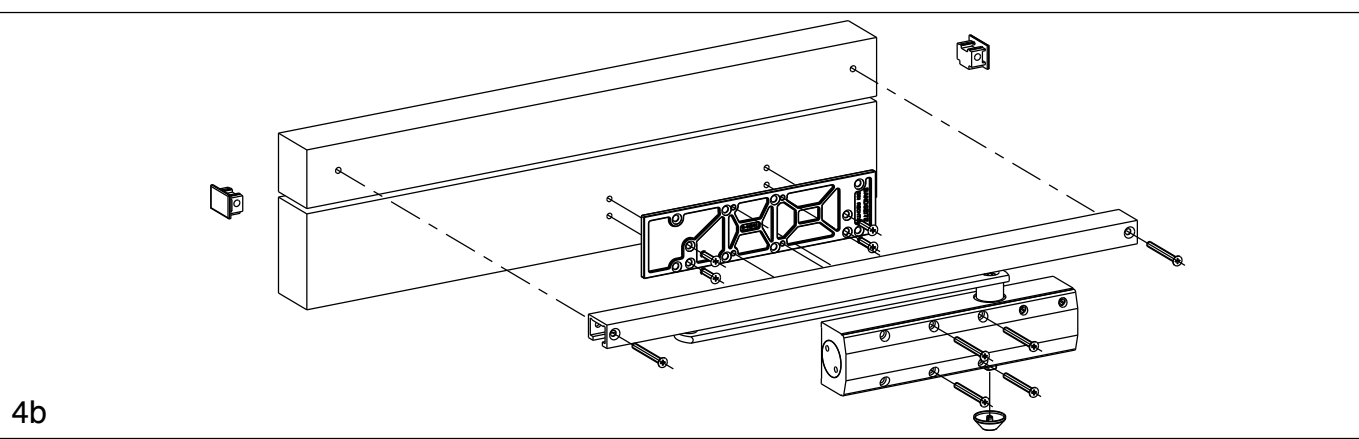

4b

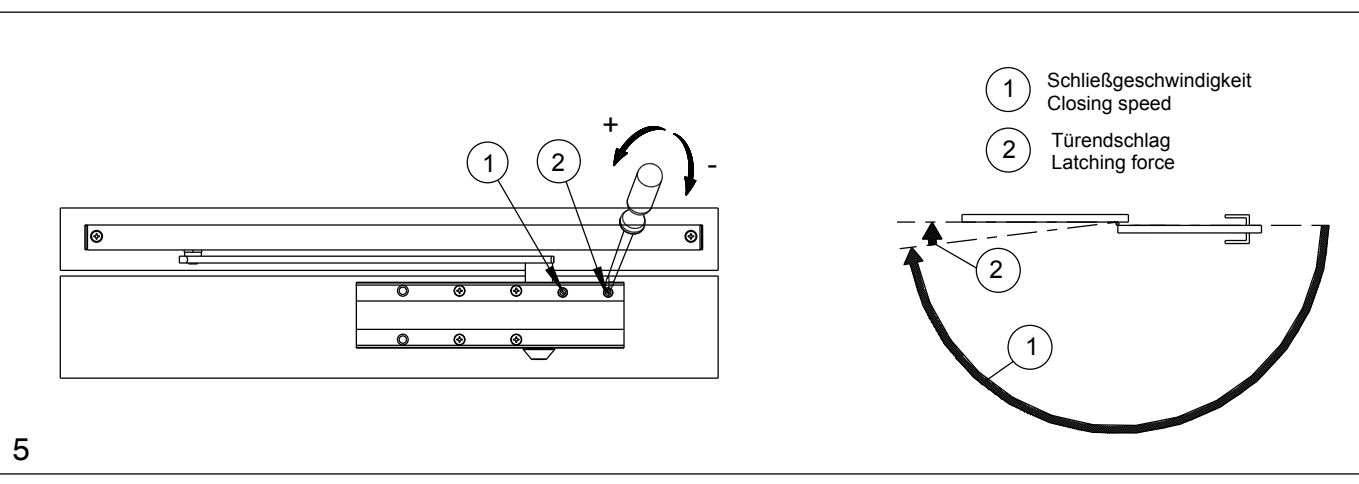

5

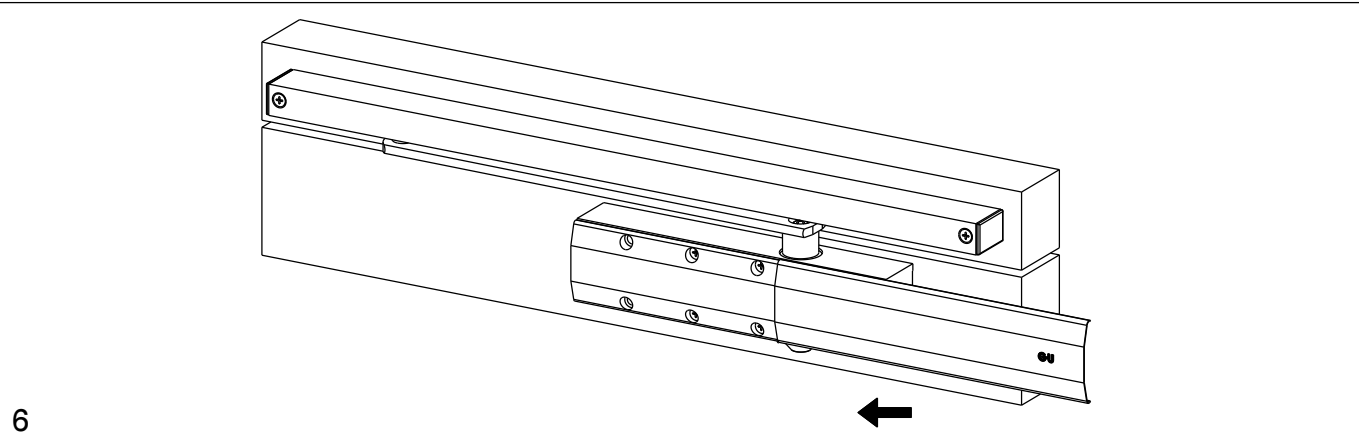

6

Description





OTS 633 Normalmontage Bandseite, DIN rechts K-17521

--

OTS 633 standard mounting on hinge side, DIN right K-17521

	Release No.	Level	Released		Scale	Modification	Size
	--	Ver.	--	Wi	%	5	4
	Mod. No. G33596	Draft	15.03.2017	Se		Drawing No.	Sheet
	Replacement for --						0-44861-PL-0-0

	0432-CPD-0067	EN 1154:1996 + A1:2002	4	8	3	1	1	3
			Substance: ---					

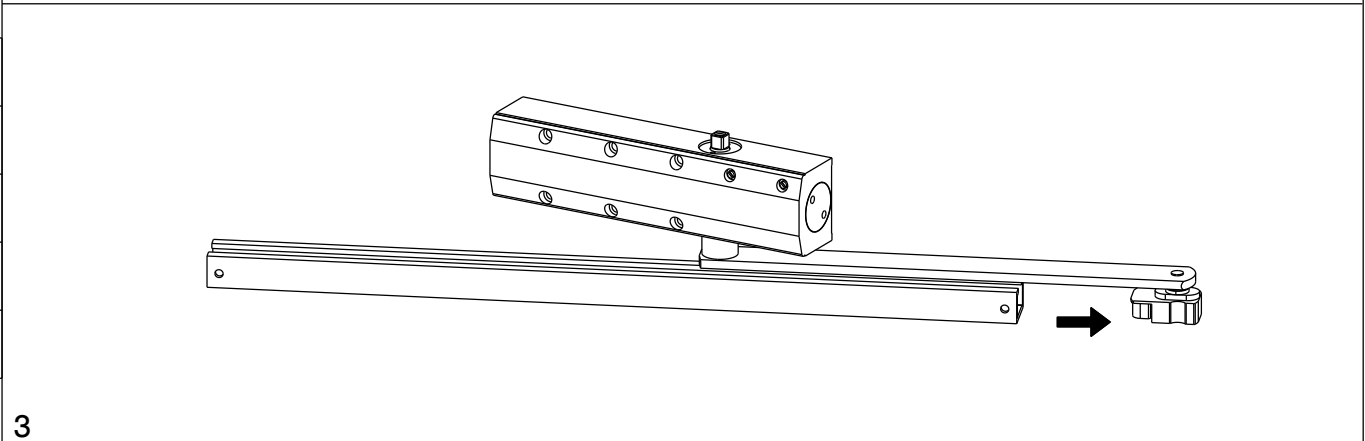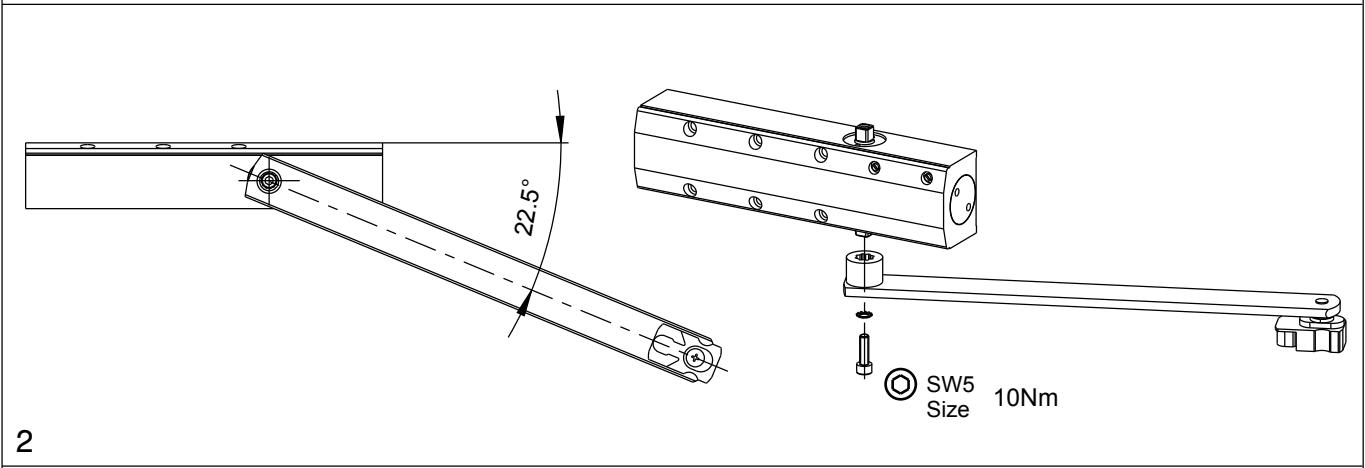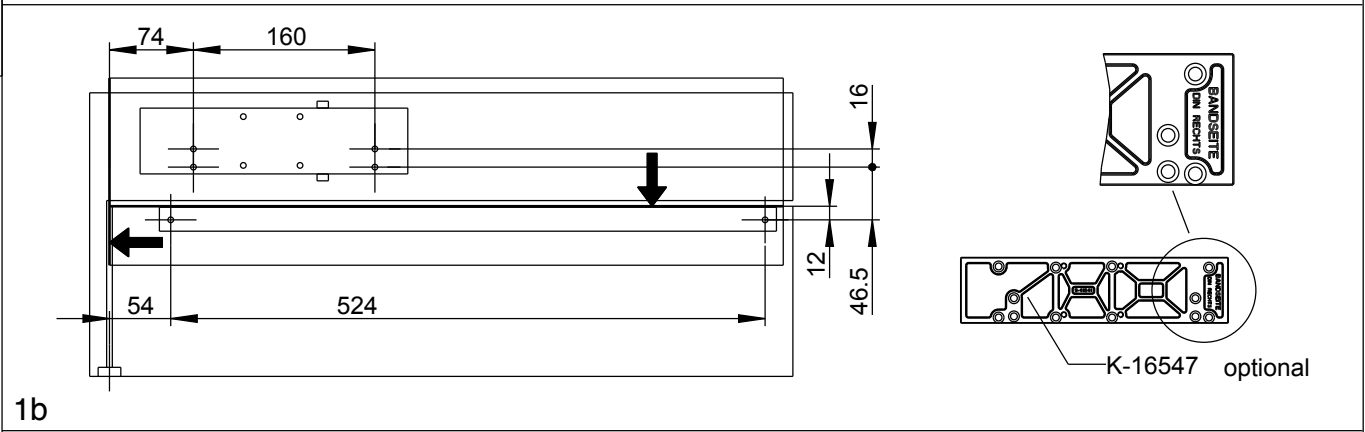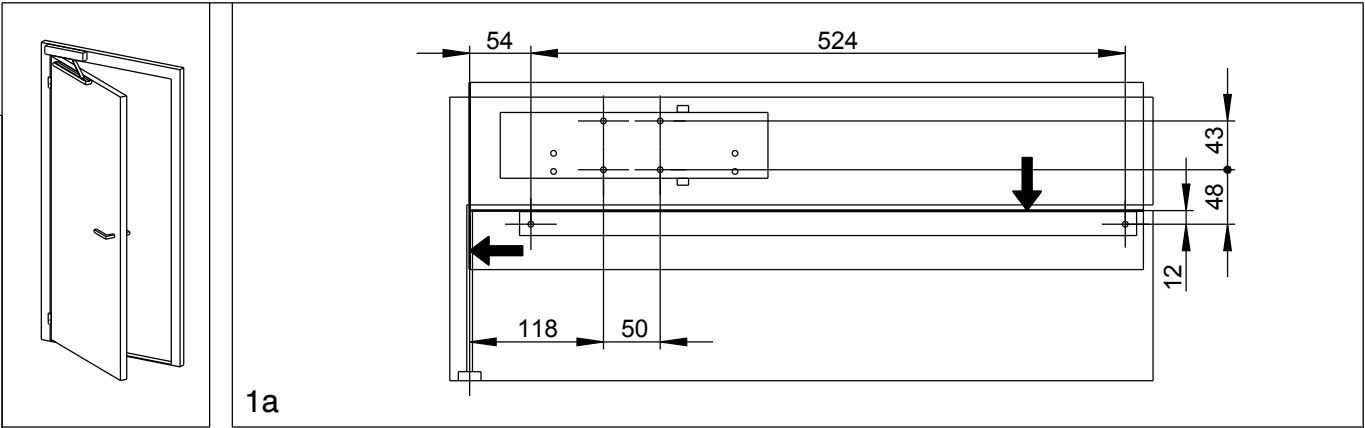

Description


OTS 633 Kopfmontage Bandseite, DIN links K-17521

--


OTS 633 transom mounting on hinge side, DIN left K-17521

	Release No.	Level	Released		Scale	Modification	Size
	--	Ver.	--	Wi	%	5	4
	Mod. No. G33596	Draft	15.03.2017	Se		Drawing No.	Sheet
	Replacement for --					0-44861-PL-0-0	


4a

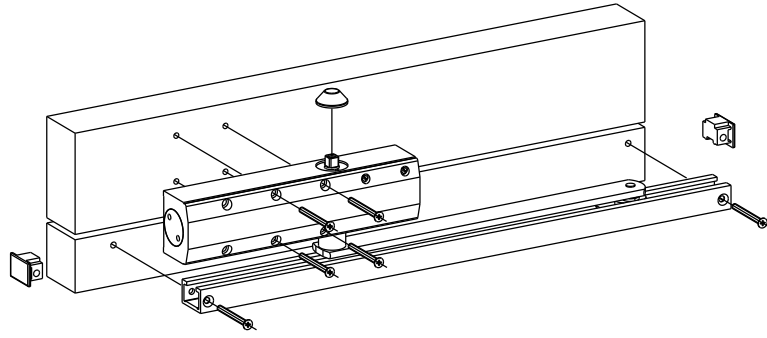


4b

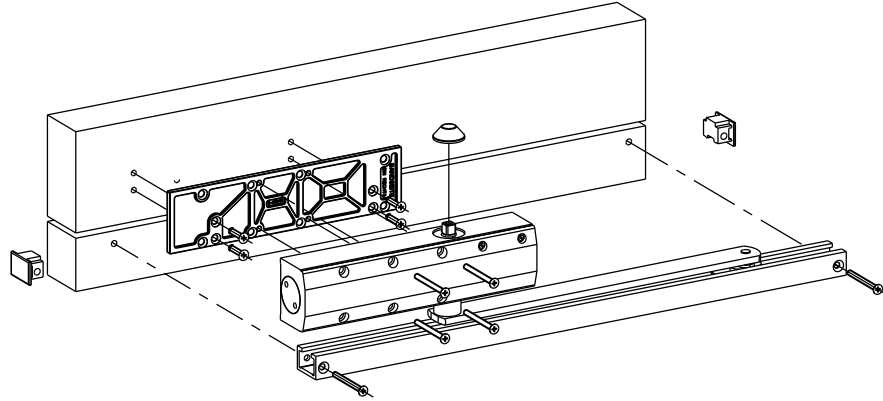


5

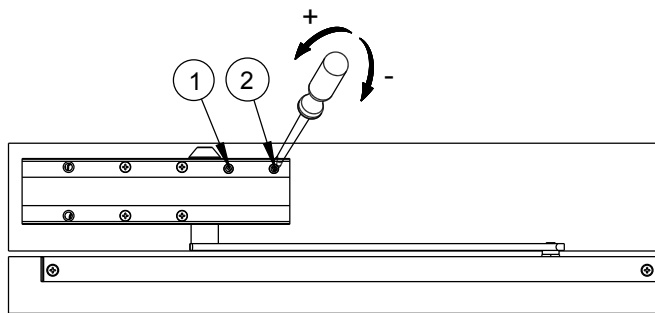

- 1 Schließgeschwindigkeit
Closing speed
- 2 Türendschlag
Latching force

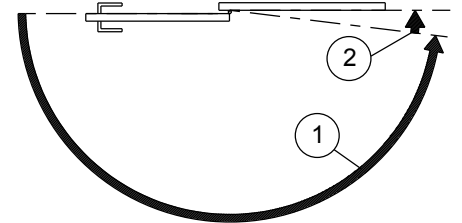

6

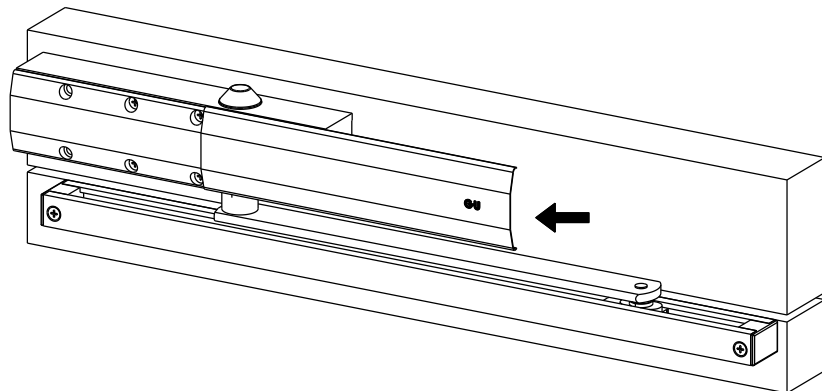

Description

OTS 633 Kopfmontage Bandseite, DIN links K-17521

--

OTS 633 transom mounting on hinge side, DIN left K-17521



Release No.
--
Mod. No.
G33596

Replacement for --

Level
Ver.
Draft

Released

--

15.03.2017

Wi

Se

Scale
%

Modification

5

Drawing No.

0-44861-PL-0-0


Size

4


Sheet

6/12



	Gretsch-Unitas GmbH Baubeschläge Johann-Maus-Str. 3 D-71254 Ditzingen	08					
0432-CPD-0067	EN 1154:1996 + A1:2002	4	8	3	1	1	3
Substance: -----							




1a

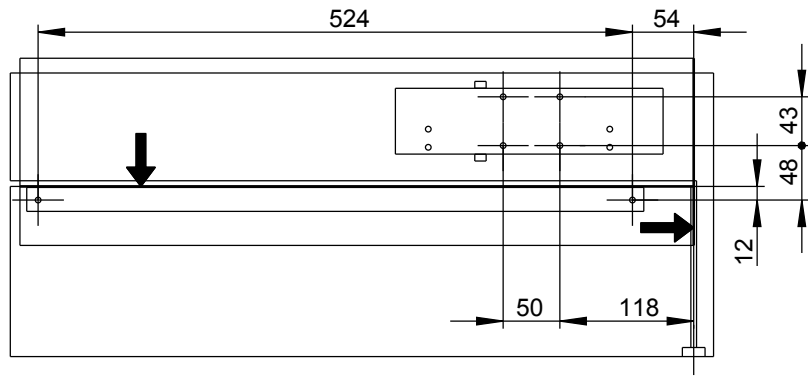


1b

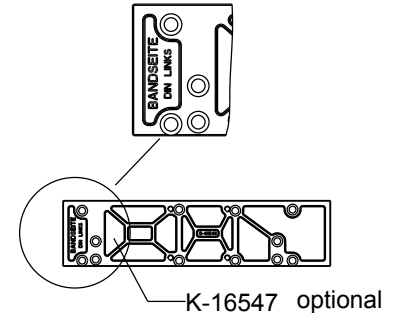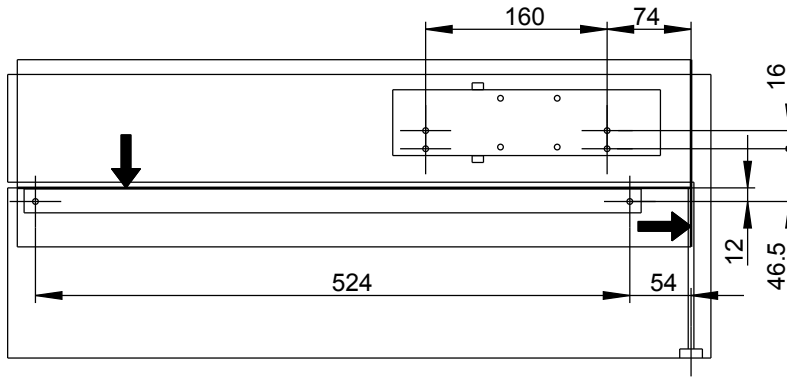

2

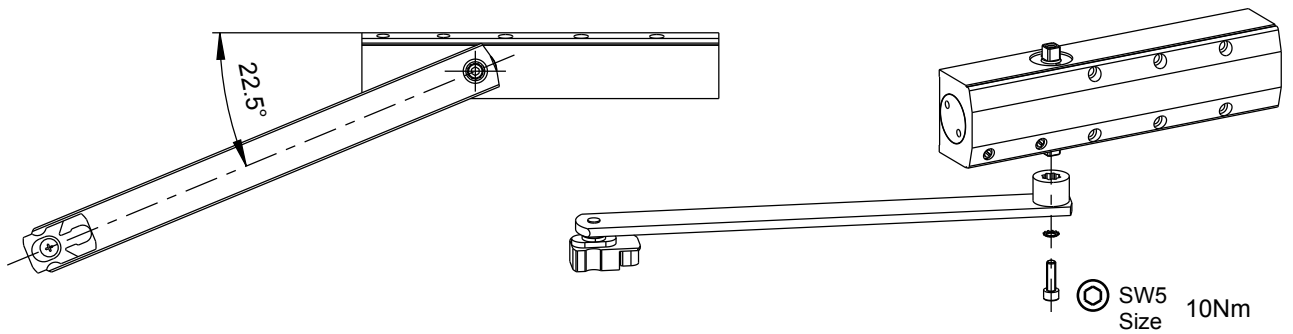

3

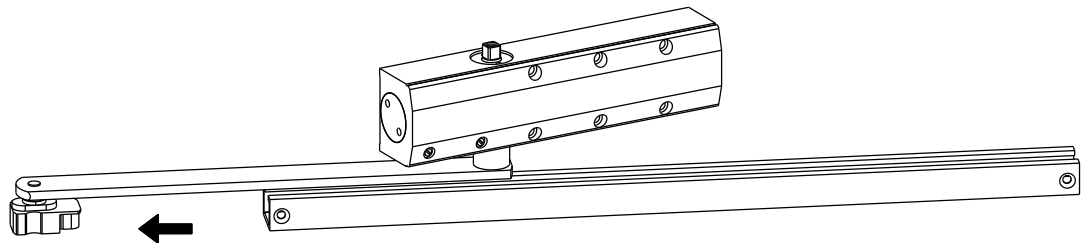

Description

OTS 633 Kopfmontage Bandseite, DIN rechts K-17521

--
OTS 633 transom mounting on hinge side, DIN right K-17521



Release No.
--
Mod. No.
G33596

Level
Ver.
Draft

Released
--
15.03.2017

Wi
Se


Scale
%

Modification
5
Drawing No.


0-44861-PL-0-0

Size
4
Sheet
7/12

4a

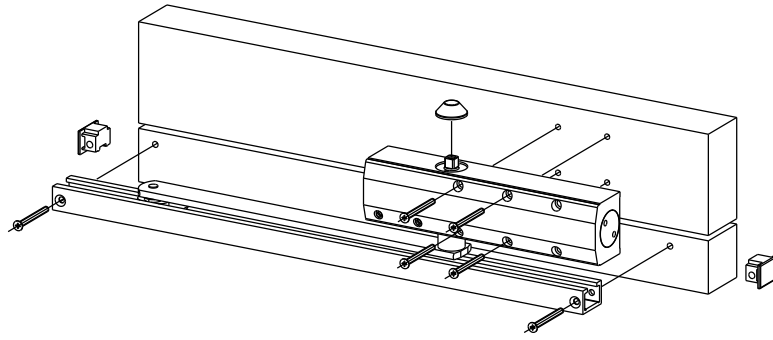


4b

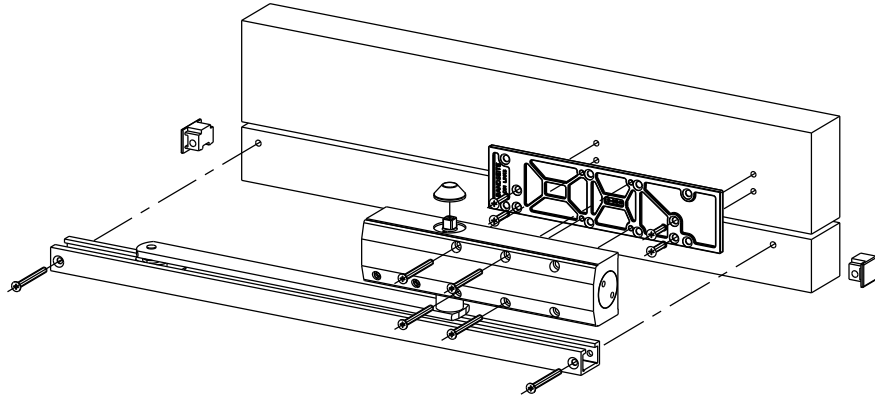


Proprietary rights apply in accordance with ISO 16016.

5

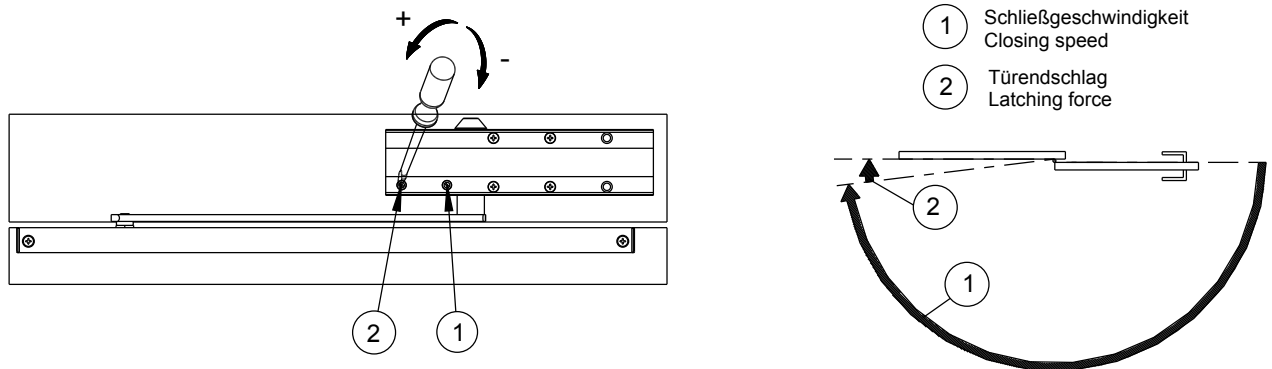

6

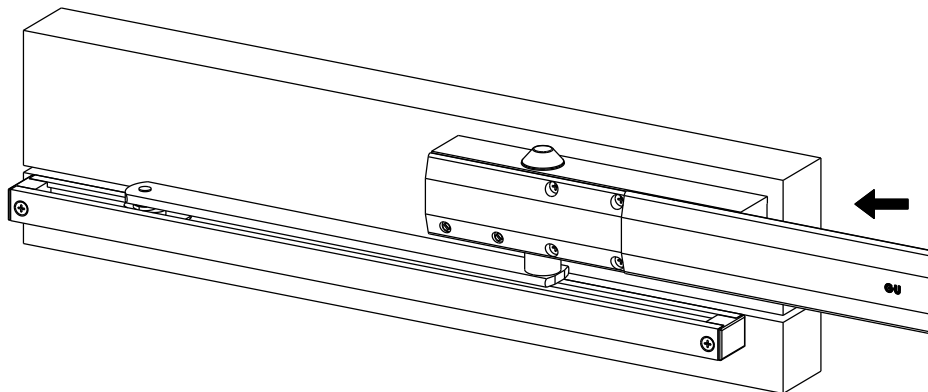

Description

OTS 633 Kopfmontage Bandseite, DIN rechts K-17521

--
OTS 633 transom mounting on hinge side, DIN right K-17521



Release No.
--
Mod. No.
G33596

Replacement for --

Level
Ver.
Draft

Released

--

15.03.2017

Wi

Se

Scale
%

Modification

5

Drawing No.

0-44861-PL-0-0

Size

4

Sheet

8/12

EN

ES

FR


--

--



Montageanleitung /
assembly instructions

V5


08	1	1	3
	3	8	3
Gretsch-Unitas GmbH Bauteilbezeichnung Johann-Maus-Str. 3 D-71254 Ditzingen			
EN 1154:1996 + A1:2002			
0432-CPD-0087			
Substance: ---			

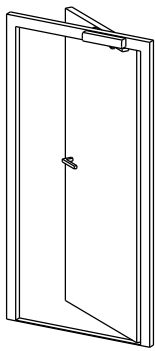


1a

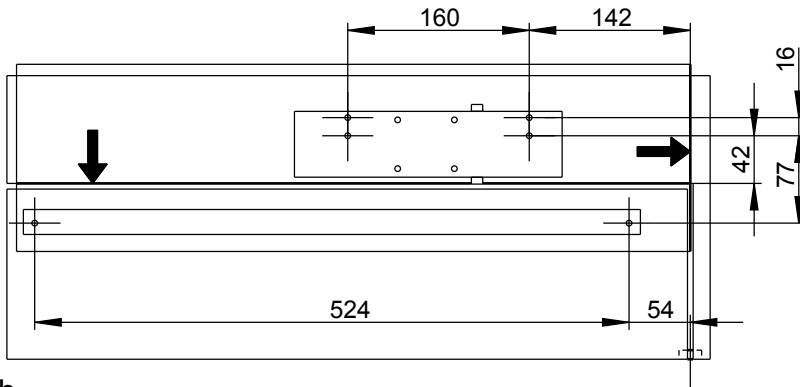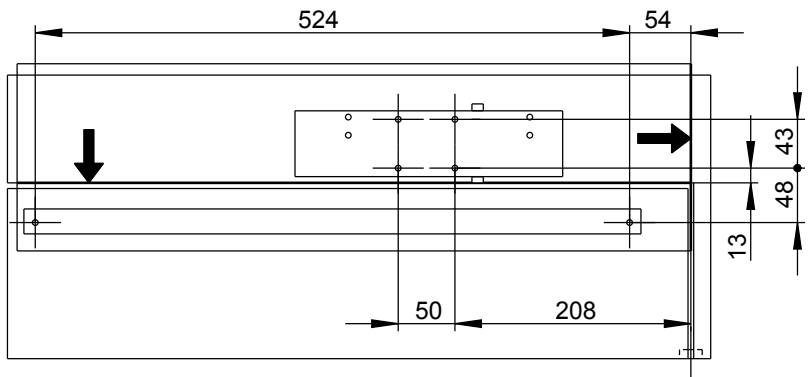



1b



K-17811 optional




K-16547 optional

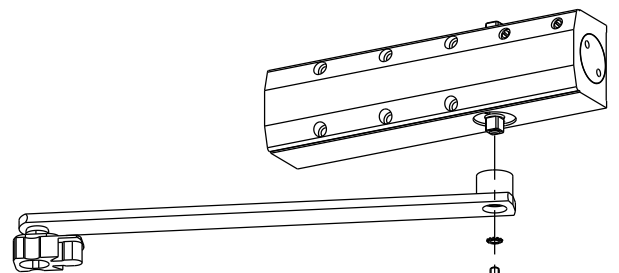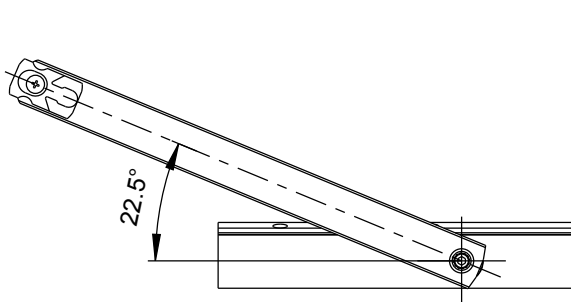

SW5
Size 10Nm

2

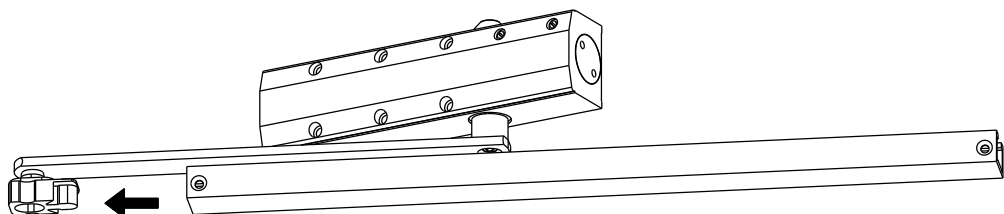

3

Description

OTS 633 Kopfmontage Bandgegenseite, DIN links K-17521

--
OTS 633 transom mounting opposite hinge side, DIN left K-17521



Release No.
--
Mod. No.
G33596

Level
Ver.
Draft

Released
--
15.03.2017

Wi
Se

Scale
%

Modification
5

Drawing No.

0-44861-PL-0-0

Size
4

Sheet

9/12

Montageanleitung /
assembly instructions

V5

Proprietary rights apply in accordance with ISO 16016.

EN


ES

FR


--

--


4a

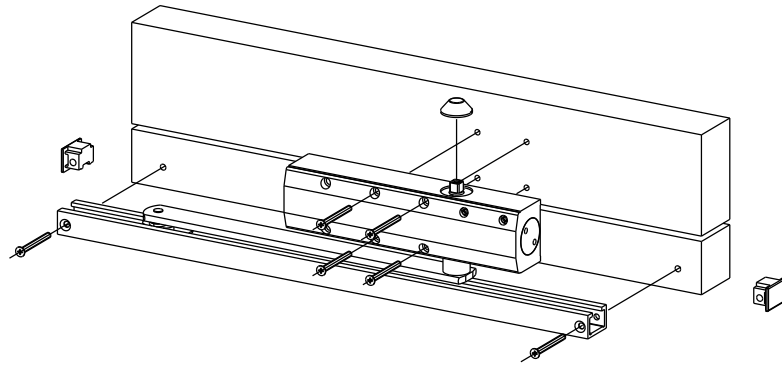


4b

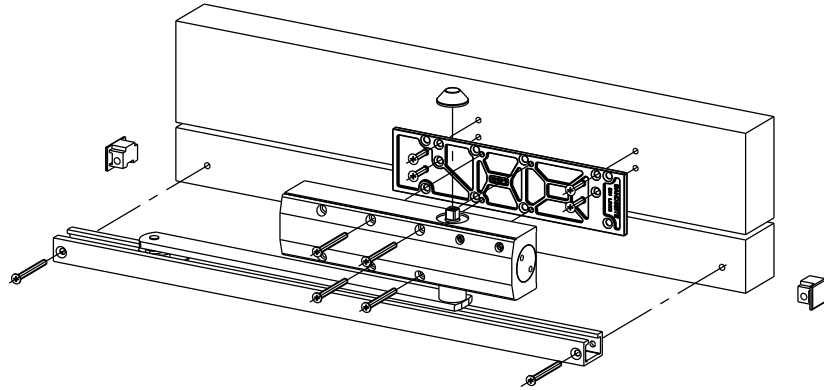

5

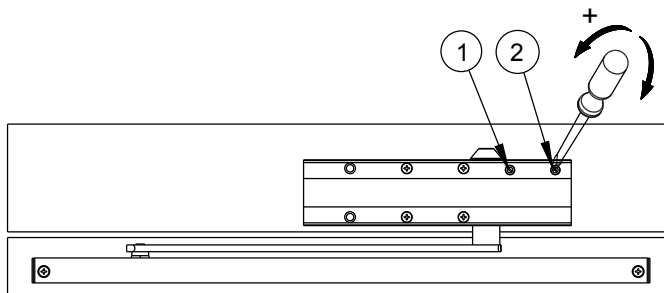


- 1 Schließgeschwindigkeit
Closing speed
- 2 Türendschlag
Latching force

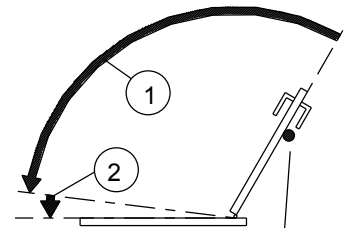

Türstopper bauseits setzen
Door stop to be provided by customer
max. 105°

6

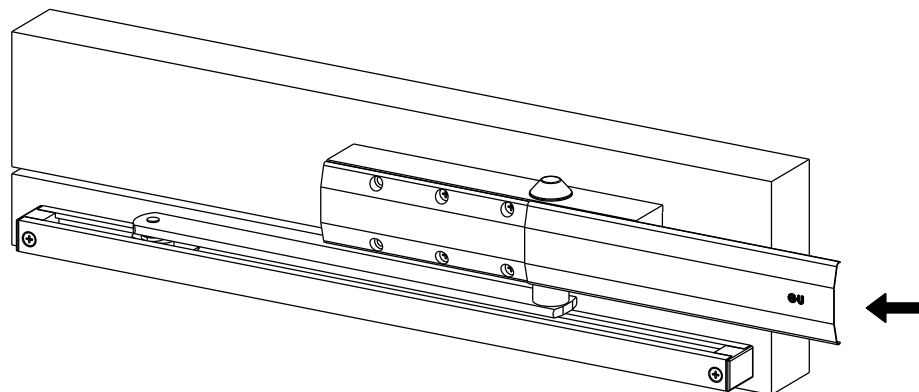

EN

ES

FR

--

--

Montageanleitung /
assembly instructions
V5

Description

OTS 633 Kopfmontage Bandgegenseite, DIN links K-17521

--
OTS 633 transom mounting opposite hinge side, DIN left K-17521



Release No.
--
Mod. No.
G33596

Replacement for --

Level
Ver.
Draft

Released

--

15.03.2017

Wi

Se

Scale
%

Modification

5

Drawing No.

0-44861-PL-0-0


Size

4



Sheet

10/12


	Gretsch-Unitas GmbH Baubeschläge Johann-Maus-Str. 3 D-71254 Ditzingen	08						
0432-CPD-0067	EN 1154:1996 + A1:2002	3	8	3	1	1	3	
Substance: -----								

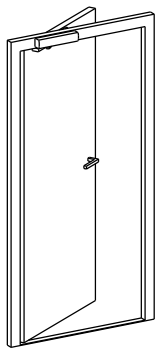


1a

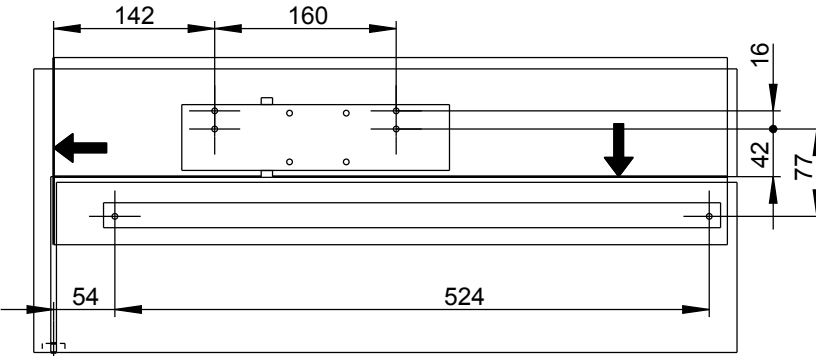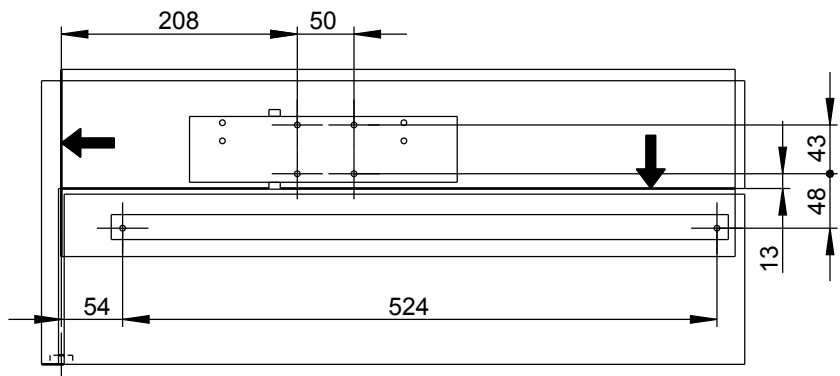

1b




K-17811 optional




K-16547 optional

Proprietary rights apply in accordance with ISO 16016.

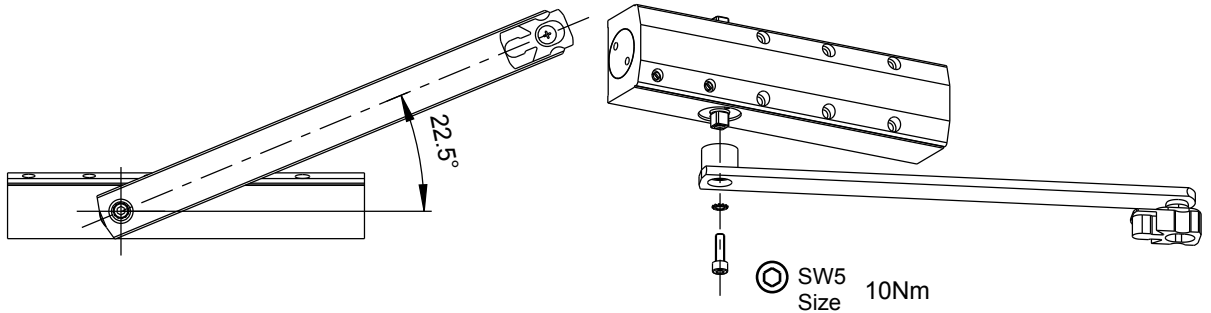

2

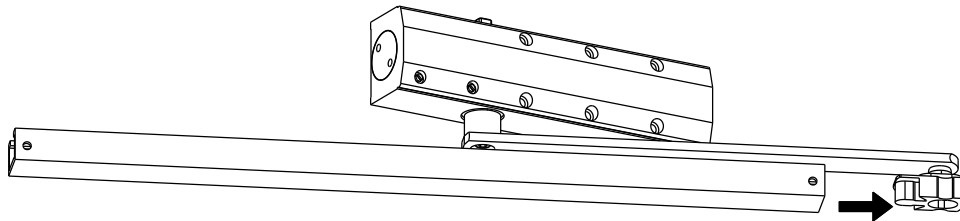

3

Description

OTS 633 Kopfmontage Bandgegenseite, DIN rechts K-17521

--

OTS 633 transom mounting opposite hinge side, DIN right K-17521



Release No.
--
Mod. No.
G33596

Level
Ver.
Draft

Released
--
15.03.2017

Wi
Se


Scale
%

Modification
5
Drawing No.


0-44861-PL-0-0

Size
4
Sheet
11/12


4a

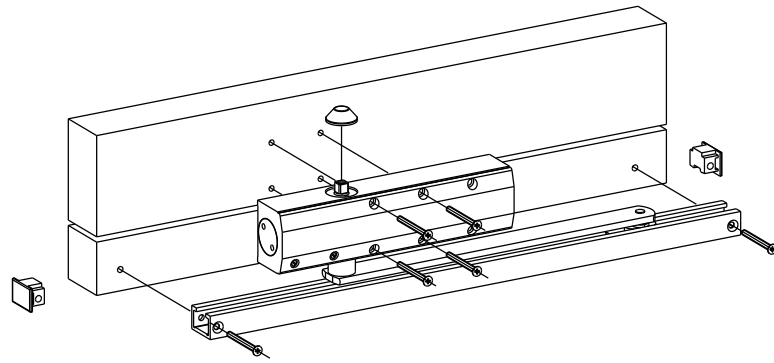


4b

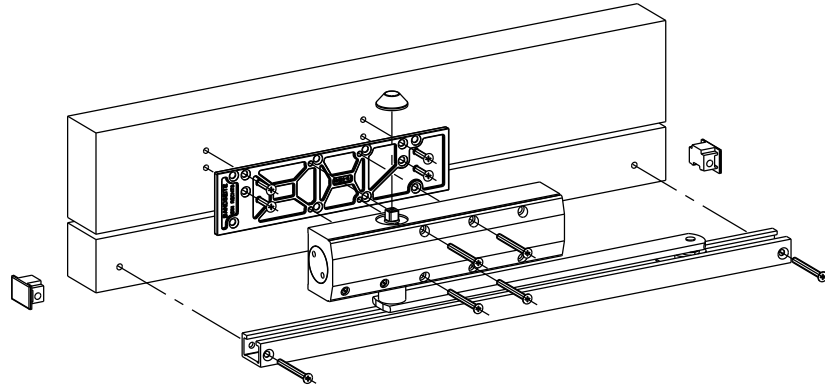

5

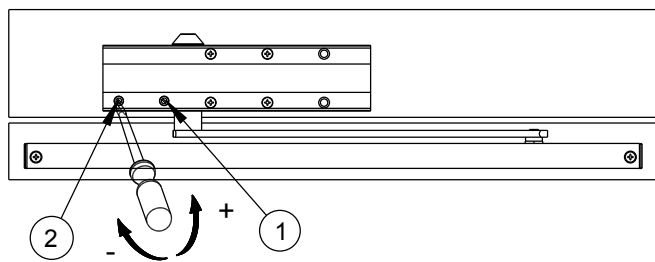


- 1 Schließgeschwindigkeit
Closing speed
- 2 Türendschlag
Latching force

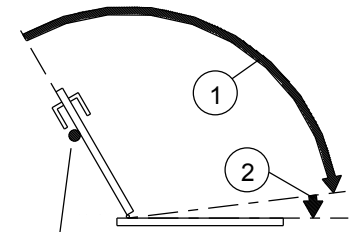

Türstopper bauseits setzen
Door stop to be provided by customer
max. 105°

6

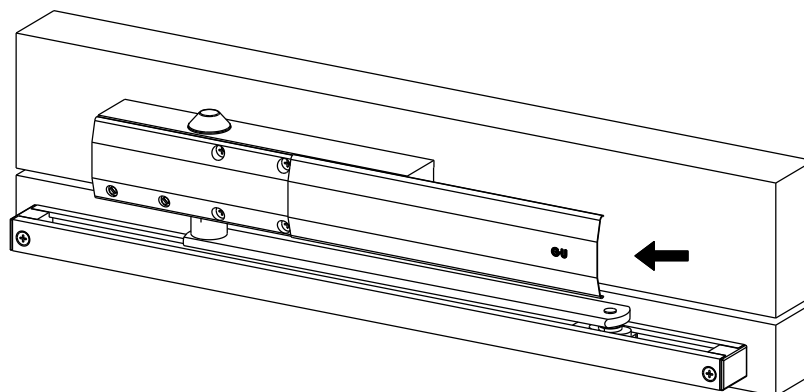

Description

OTS 633 Kopfmontage Bandgegenseite, DIN rechts K-17521

--

OTS 633 transom mounting opposite hinge side, DIN right K-17521



Release No.
--
Mod. No.
G33596

Level
Ver.
Draft

Released
--
15.03.2017

Wi
Se





Scale
%

Modification
5
Drawing No.

0-44861-PL-0-0


Size
4
Sheet
12/12

	Gretsch-Unitas GmbH Baubeschläge Johann-Maus-Str. 3 D-71254 Ditzingen	08					
0432-CPD-0067	EN 1154:1996 + A1:2002	4	8	3	1	1	3
Substance: -----							

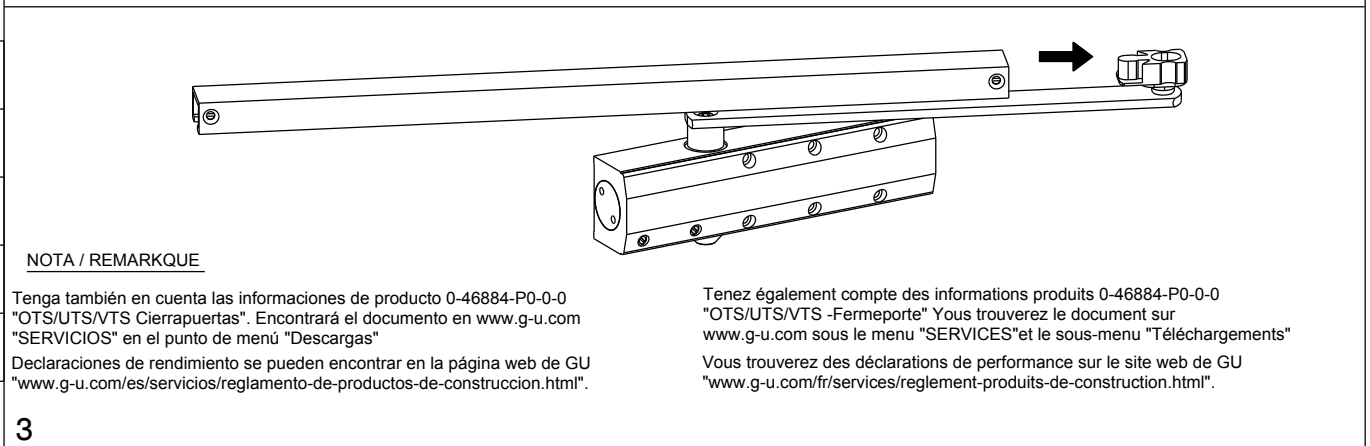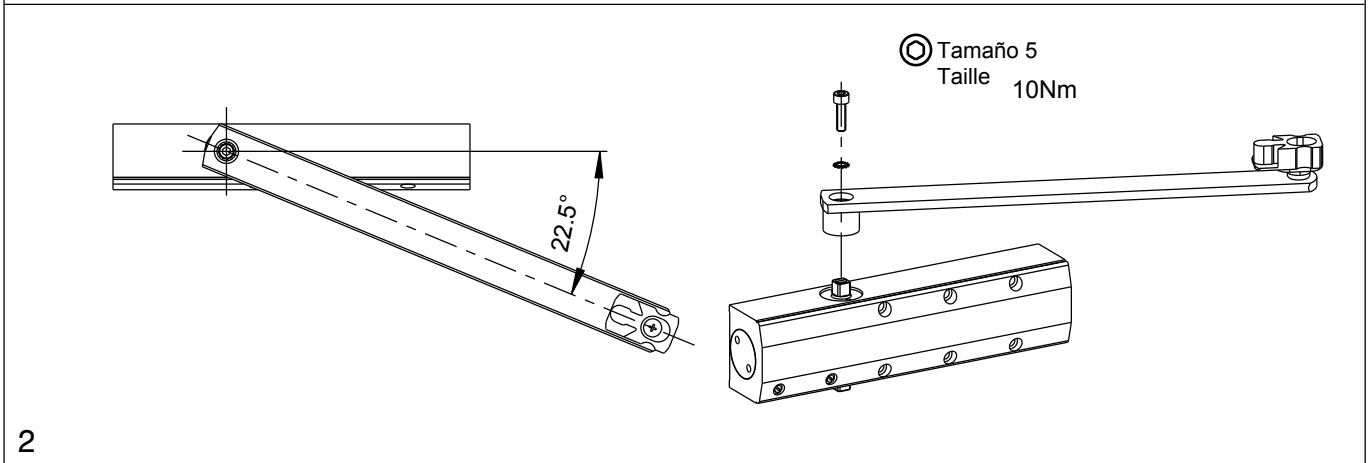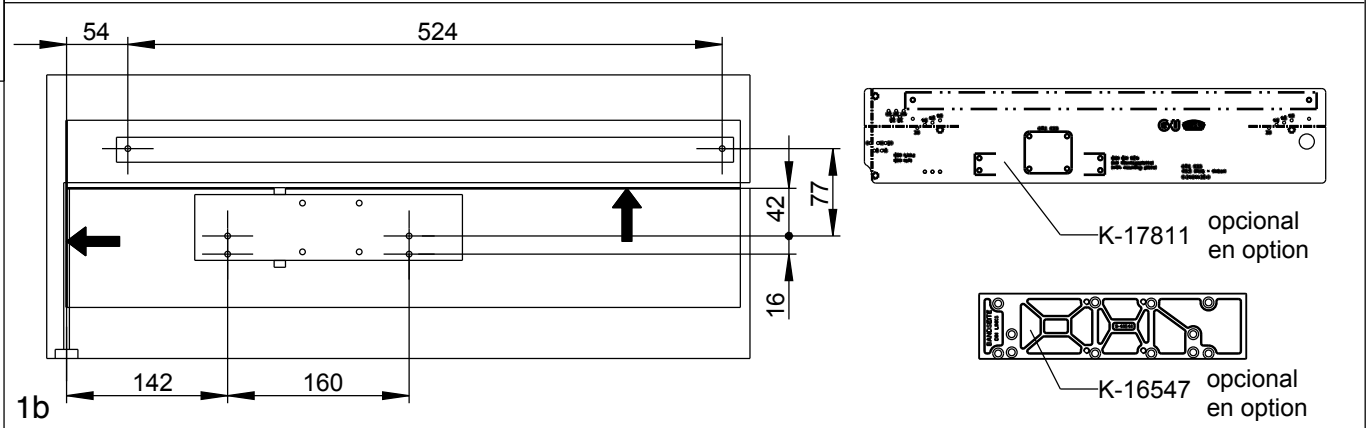
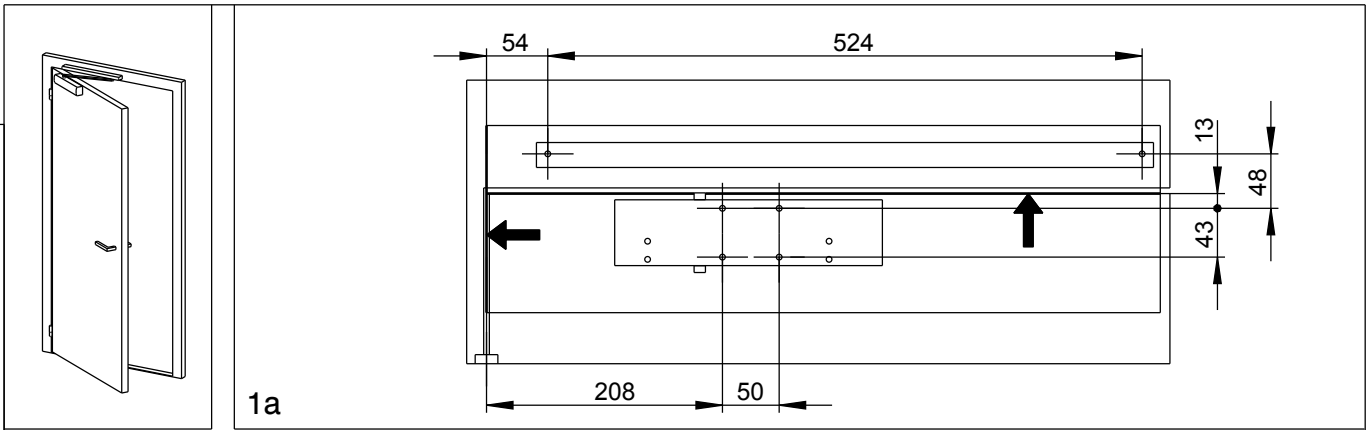


Description		OTS 633 Montaje normal lado bisagras, DIN izda. K-17521		OTS 633 montaje standard coté paumelles, DIN gauche K-17521	
GU	Release No. --	Level	Released		Scale
	Mod. No. G33596	Ver.	--	Wi	%
	Replacement for --	Draft	15.03.2017	Se	
		Modification		Size	
		5		4	
		Drawing No.		Sheet	
		0-44861-PL-0-ES		1/12	


4a

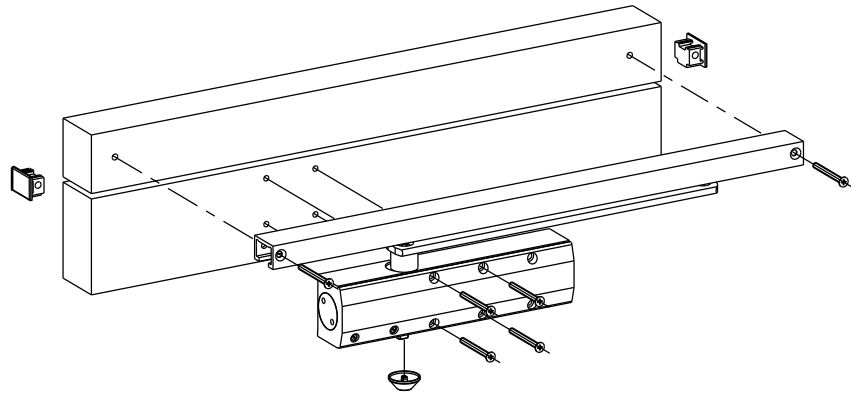


4b

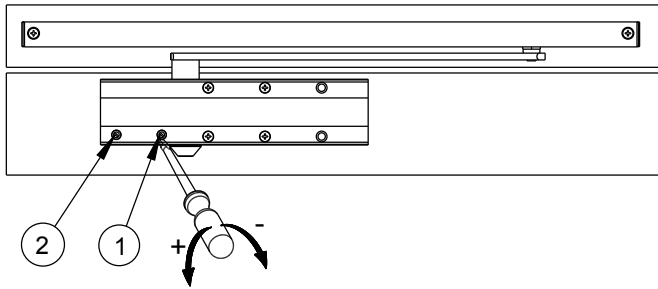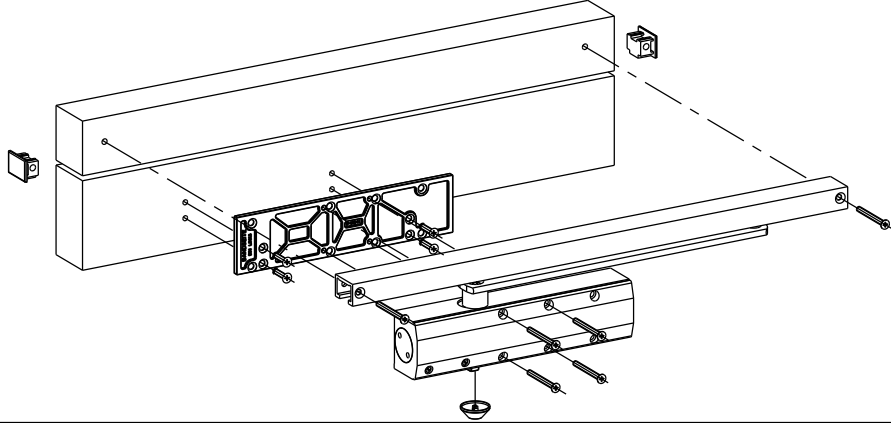

- ① Velocidad de cierre
Vitesse de fermeture
- ② Golpe final
À-coup final

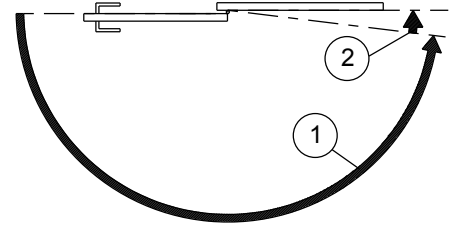

5

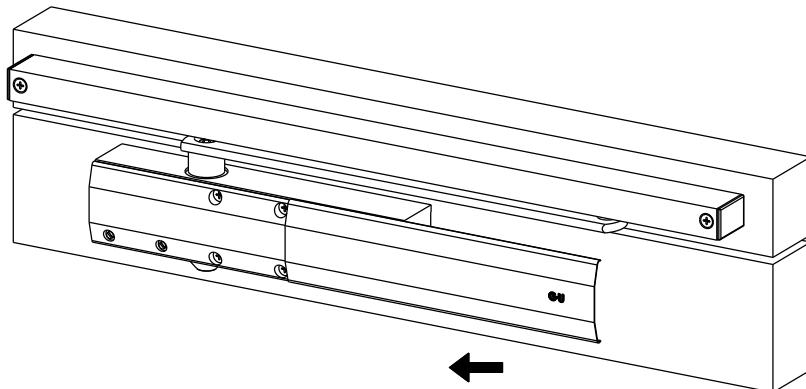

6

Description

OTS 633 Montaje normal lado bisagras, DIN izda. K-17521

OTS 633 montage standard coté paumelles, DIN gauche K-17521



Release No.
--
Mod. No.
G33596

Replacement for --

Level

Ver.

Draft

Released

--

15.03.2017

Wi

Se

Scale

%

Modification

5

Drawing No.

0-44861-PL-0-ES


Size

4


Sheet

2/12



08	1	3
	1	3
Gretsch-Unitas GmbH Baubeschläge Johann-Maier-Str. 3 D-71254 Ditzingen		
EN 1154:1996 + A1:2002		
0432-CPD-0067		
Substance: ---		




1a

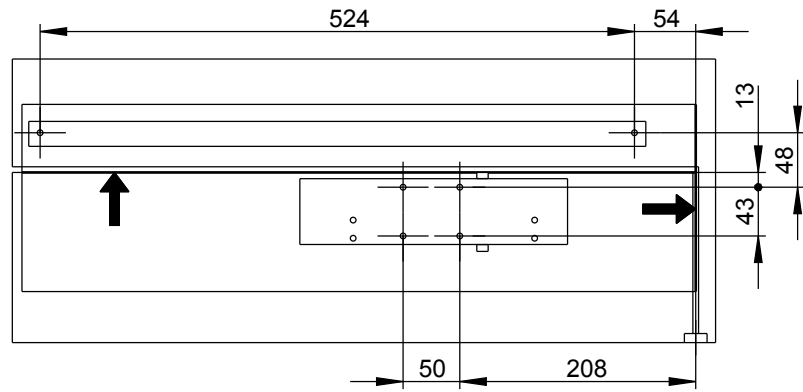

1b

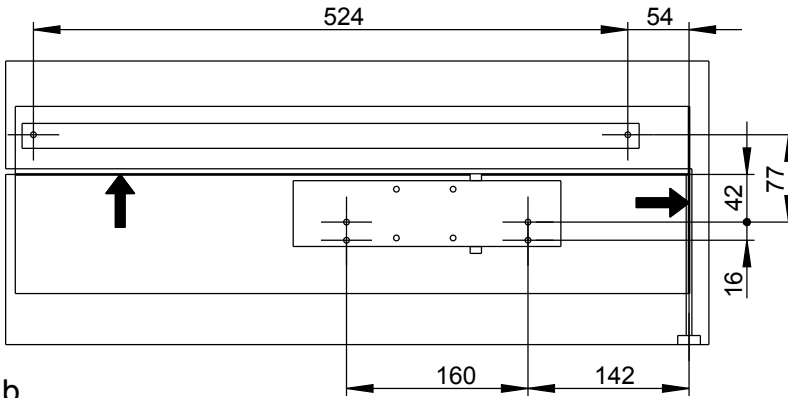


K-17811 opcional
en option




K-16547 opcional
en option

Proprietary rights apply in accordance with ISO 16016.

2

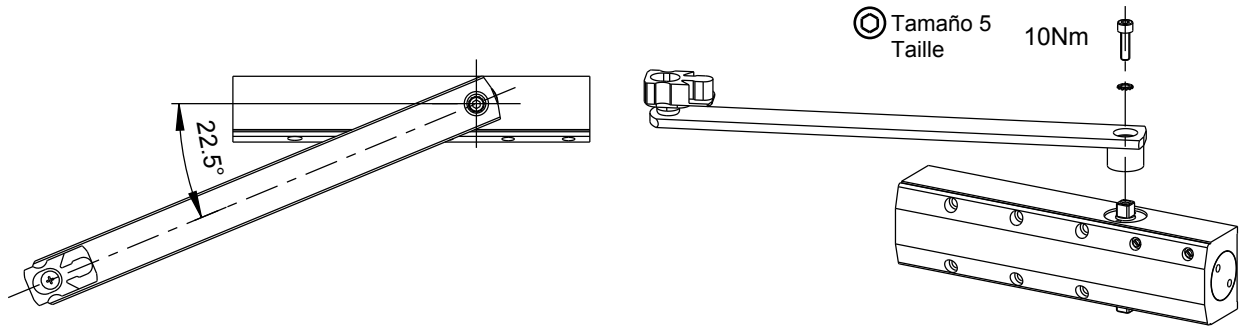

3

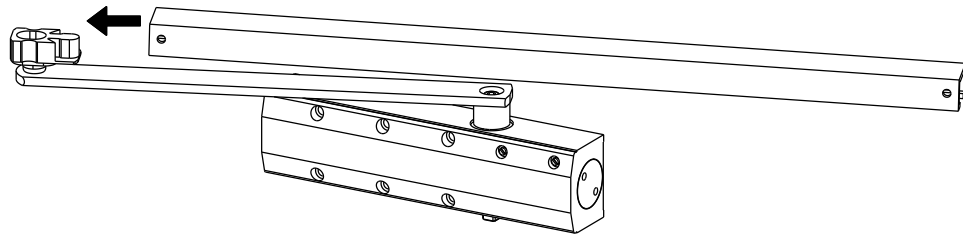

Description

OTS 633 montaje normal lado bisagras, DIN dcha. K-17521

OTS 633 montage standard coté paumelles, DIN droite K-17521



Release No.
--
Mod. No.
G33596

Replacement for --

Level

Ver.

Draft

Released

--

15.03.2017

Wi

Se

Scale

%

Modification

5

Drawing No.

0-44861-PL-0-ES


Size

4


Sheet

3/12


4a

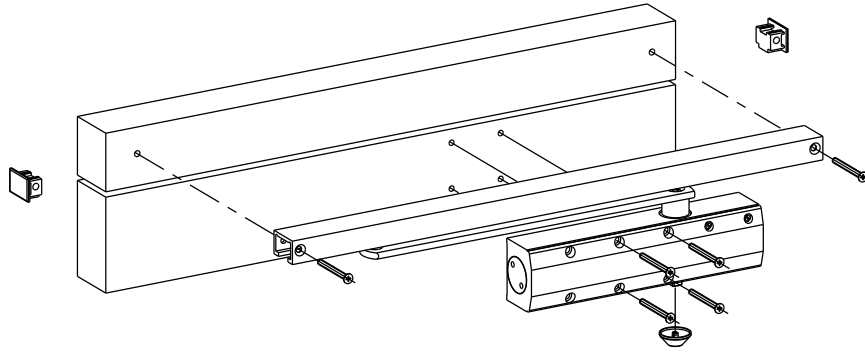


4b

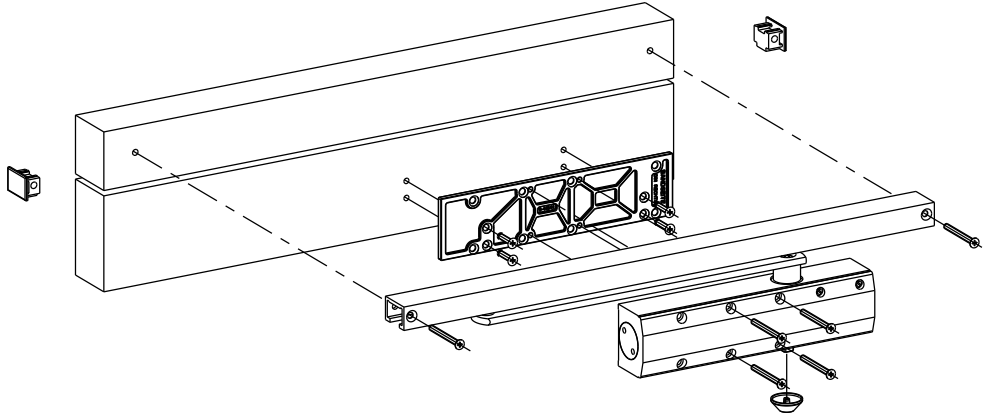

5

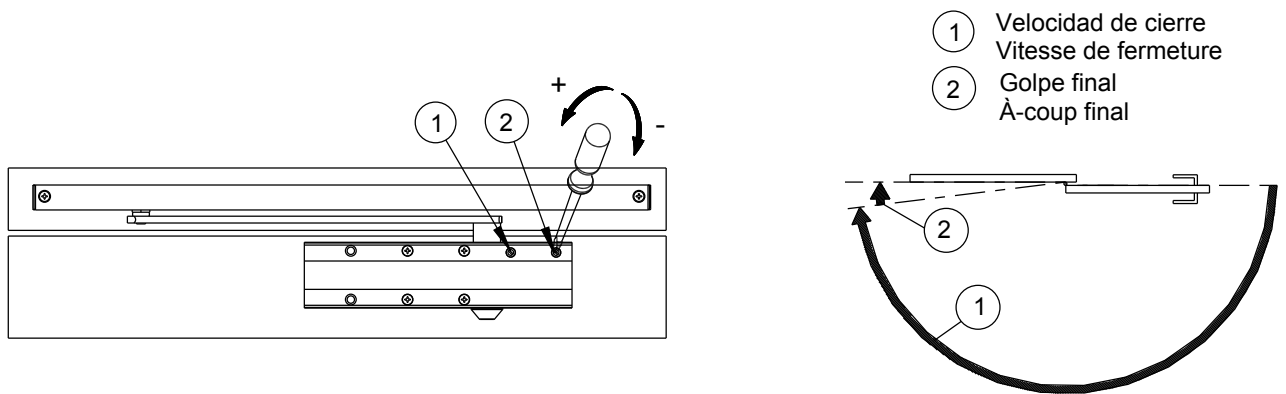

6

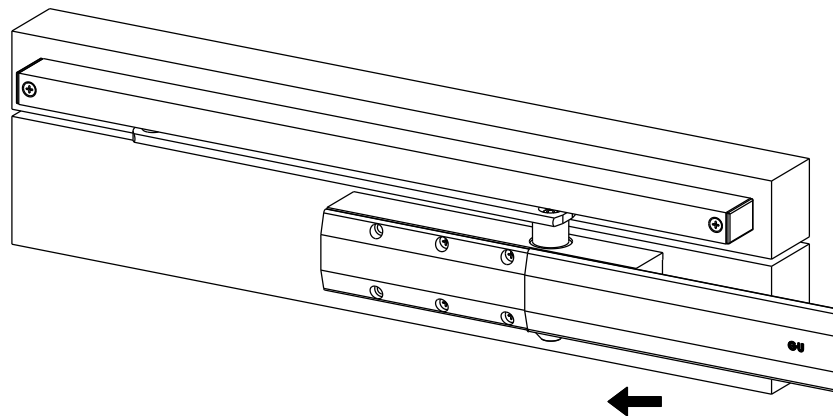

Description

OTS 633 montaje normal lado bisagras, DIN dcha. K-17521

OTS 633 montage standard coté paumelles, DIN droite K-17521



Release No.
--
Mod. No.
G33596

Replacement for --

Level
Ver.
Draft

Released

--
15.03.2017

Wi
Se

Scale
%

Modification

5

Drawing No.

0-44861-PL-0-ES

Size
4

Sheet
4/12

	Gretsch-Unitas GmbH Baubeschläge Johann-Maus-Str. 3 D-71254 Ditzingen	08						
0432-CPD-0067	EN 1154:1996 + A1:2002	4	8	3	1	1	3	

Proprietary rights apply in accordance with ISO 16016.

EN
ES
FR
--
--

Instrucciones de montaje
Notice de montage
V5

1a

1b

2

3


Description

OTS 633 montaje invertido lado bisagras, DIN izda K-17521


OTS 633 montage inversé côté paumelles, DIN gauche K-17521

	Release No. --	Level	Released		Scale %	Modification 5	Size 4
	Mod. No. G33596	Ver.	--	Wi	Drawing No.	Sheet	
	Replacement for --	Draft	15.03.2017	Se	0-44861-PL-0-ES	5/12	


4a

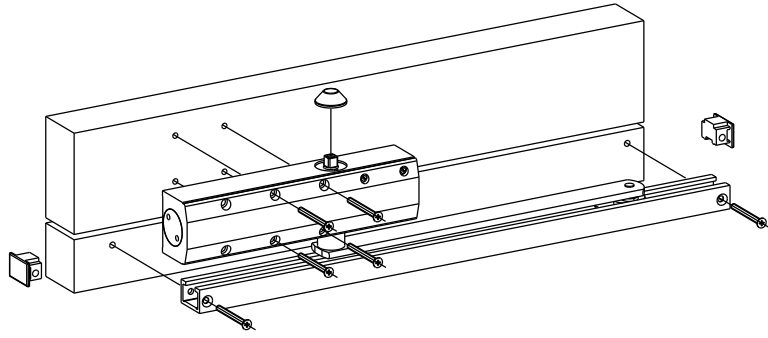


4b

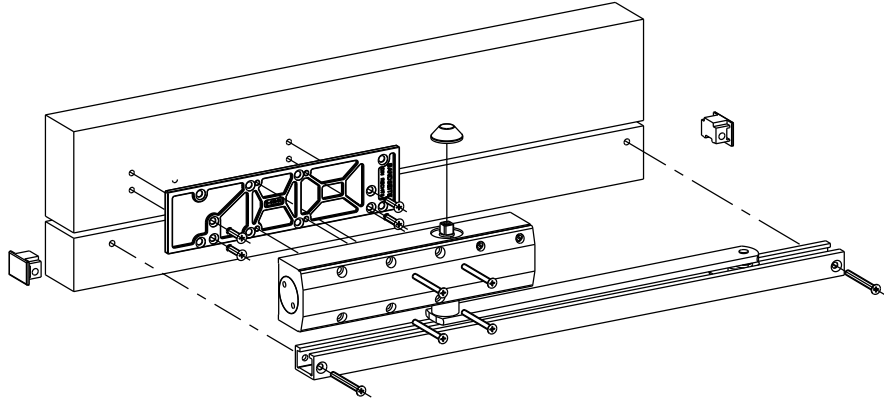


5

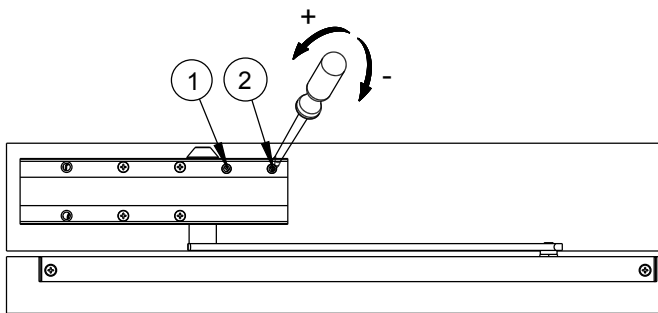

- ① Velocidad de cierre
Vitesse de fermeture
- ② Golpe final
À-coup final

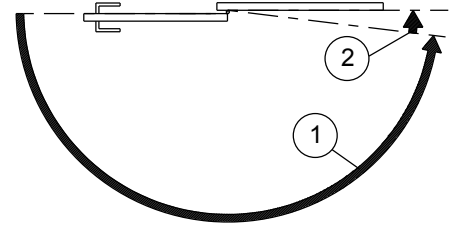

6

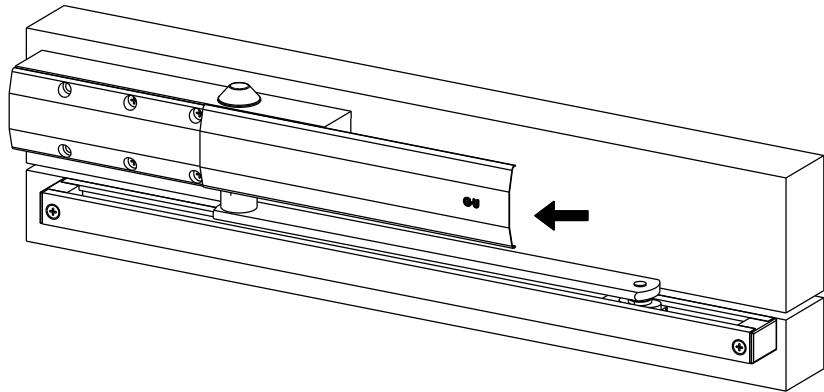

Description

OTS 633 montaje invertido lado bisagras, DIN izda K-17521

OTS 633 montage inversé côté paumelles, DIN gauche K-17521



Release No.
--
Mod. No.
G33596

Replacement for --

Level

Ver.

Draft

Released

--

15.03.2017

Wi

Se

Scale

%

Modification

5

Drawing No.

0-44861-PL-0-ES


Size

4


Sheet

6/12



	Greisch-Untas GmbH Baubeschläge Johann-Maus-Str. 3 D-71254 Ditzingen	08								
			0432-CPD-0067	EN 1154:1996 + A1:2002	4	8	3	1	1	3
			Substance: -----							




1a

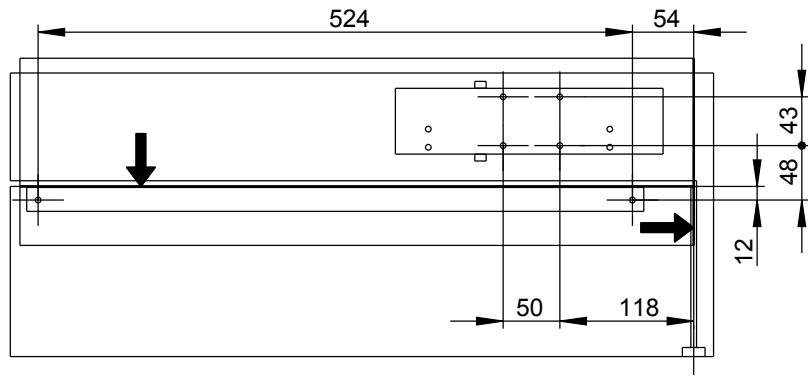


1b

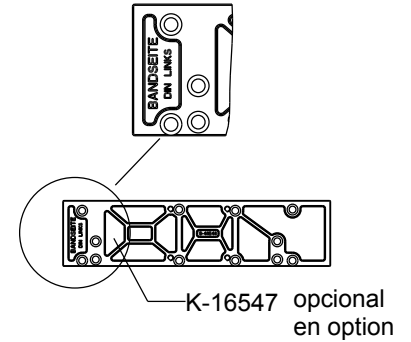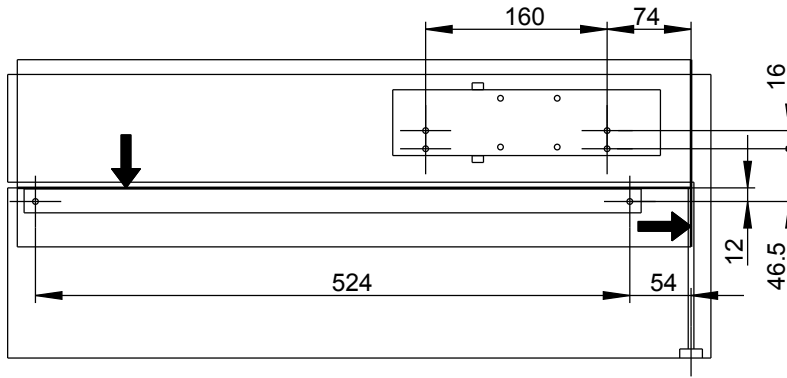

2

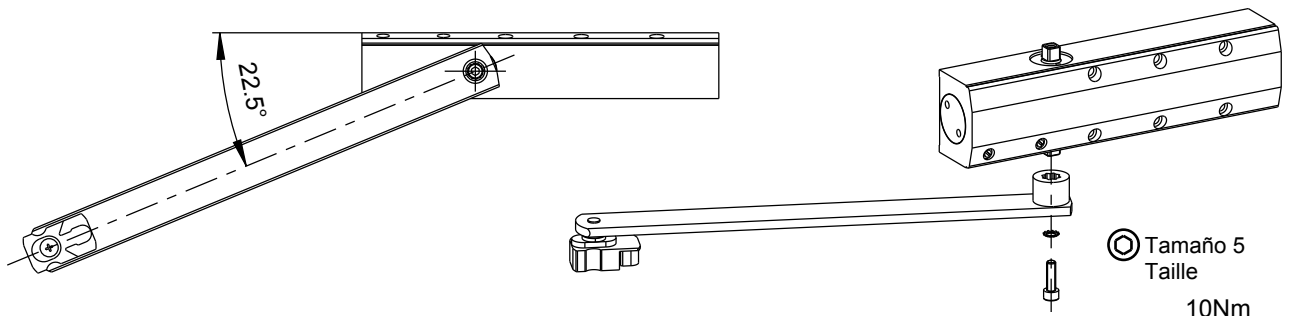

3

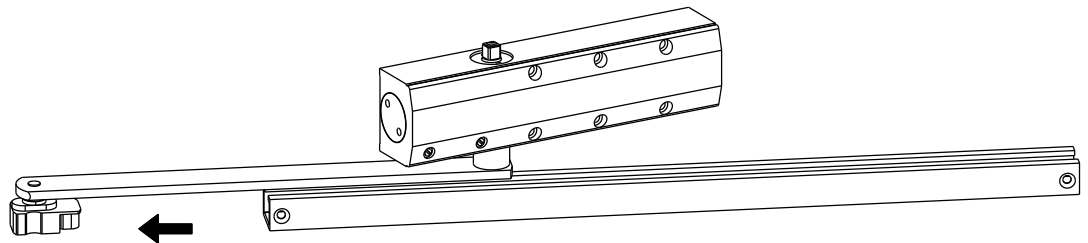

Description

OTS 633 montaje invertido lado bisagras, DIN dcha. K-17521

OTS 633 montage inversé côté paumelles, DIN droite K-17521



Release No.

--

Mod. No.

G33596

Replacement for --

Level

Ver.

Draft

Released

--

15.03.2017

Wi

Se

Scale

%

Modification

5

Drawing No.

0-44861-PL-0-ES


Size

4


Sheet

7/12


4a

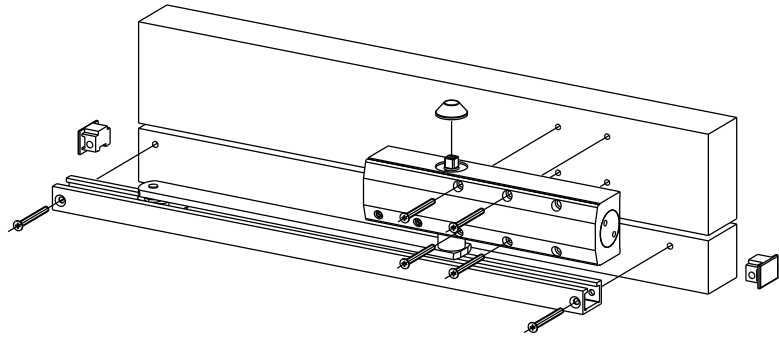


4b

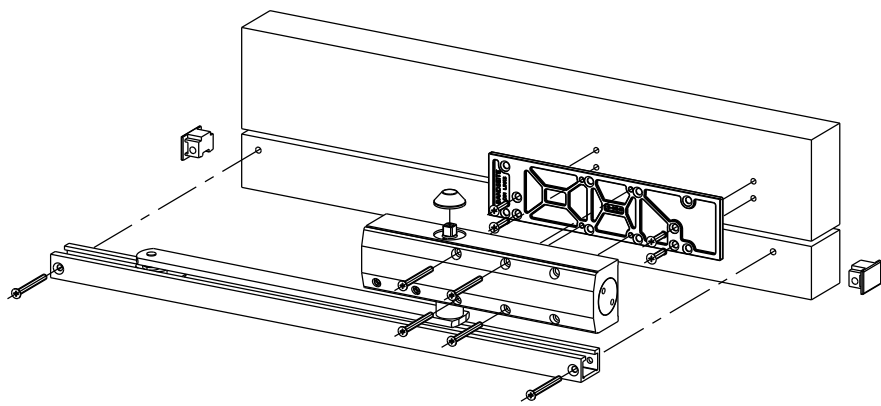

5

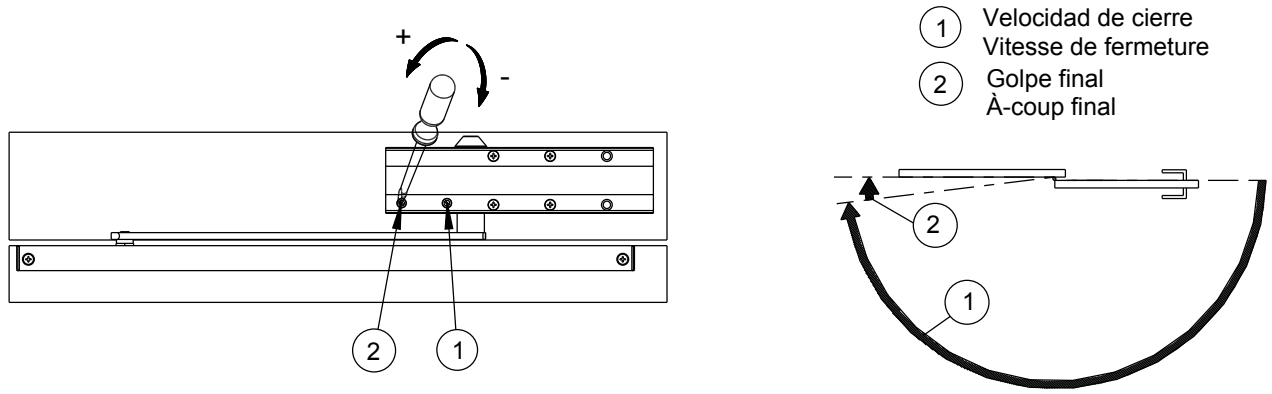

6

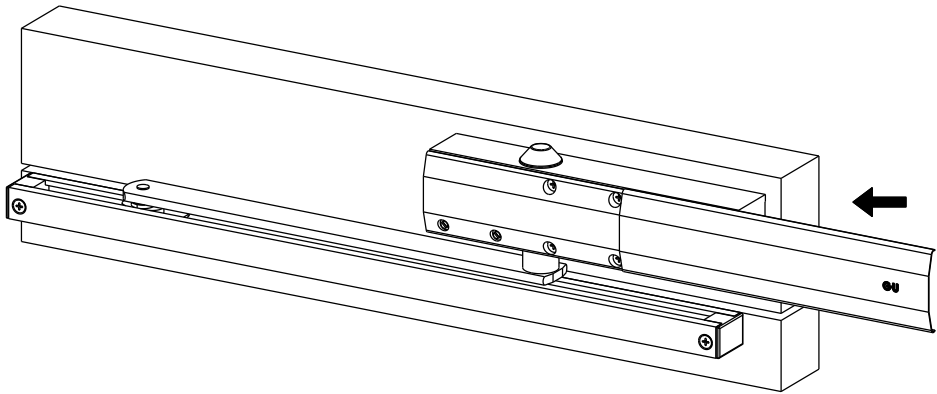

Description

OTS 633 montaje invertido lado bisagras, DIN dcha. K-17521
OTS 633 montage inversé côté paumelles, DIN droite K-17521









Release No.
--
Mod. No.
G33596
Replacement for --

Level	Released	
Ver.	--	Wi
Draft	15.03.2017	Se

Scale
%

Modification
5
Drawing No.
0-44861-PL-0-ES

Size
4
Sheet
8/12

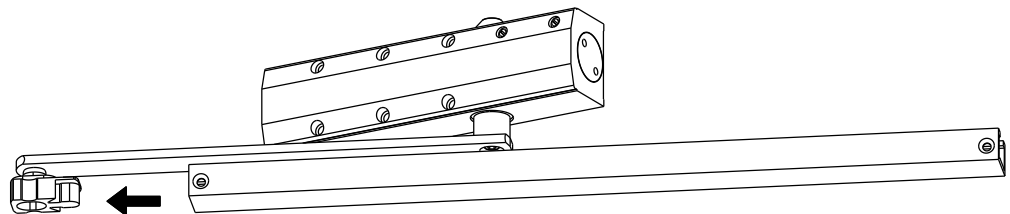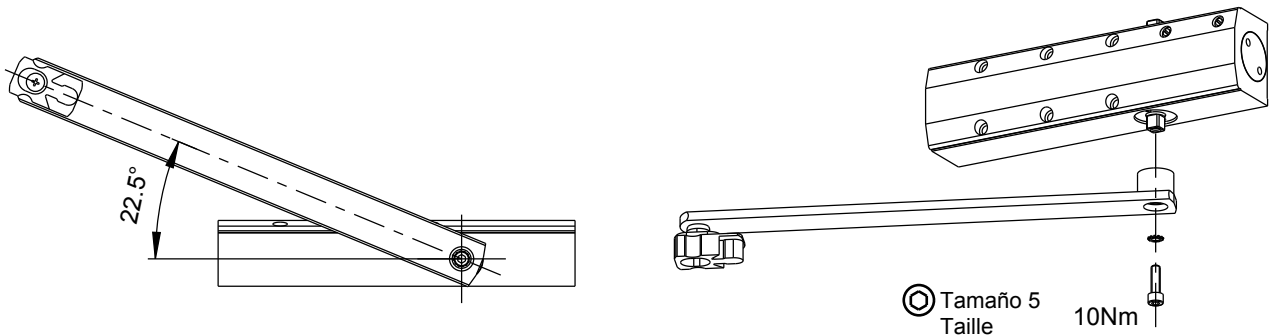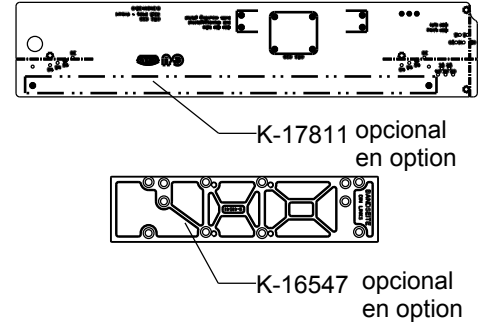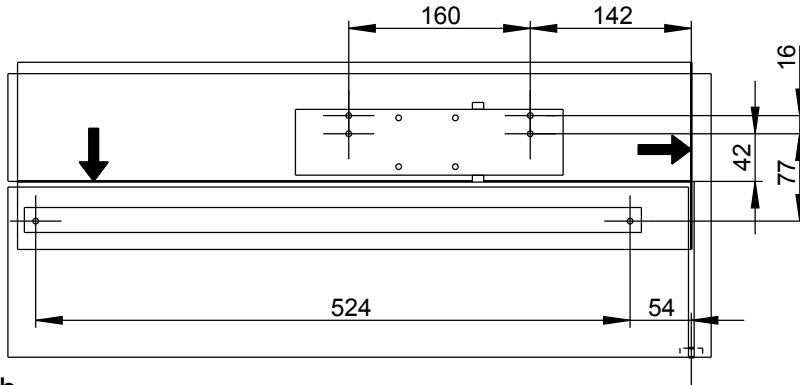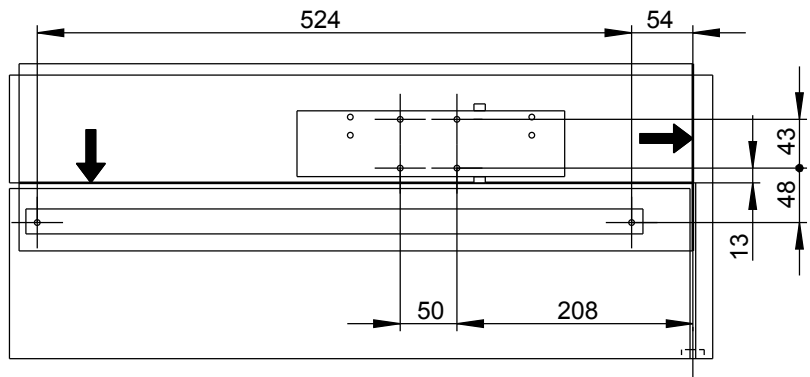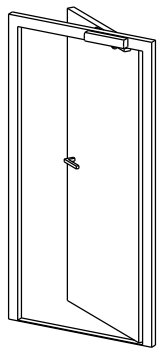

Description

OTS 633 montaje invertido lado contrario a bisagras, DIN izda. K-17521

OTS 633 montage inversé côté opposé aux paumelles, DIN gauche K-17521



Release No.

—

Mod. No.
G33596

Replacement for --

Level

Ver.

Draft

Released

—

15.03.2017

Wi

Se

Scale

%

Modification	
--------------	--

5

Drawing No.

0-44861-PL-0-ES


Size

4


Sheet

/12


4a

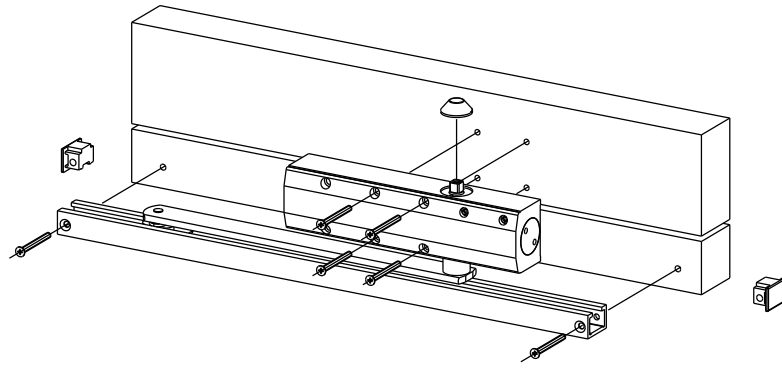


4b

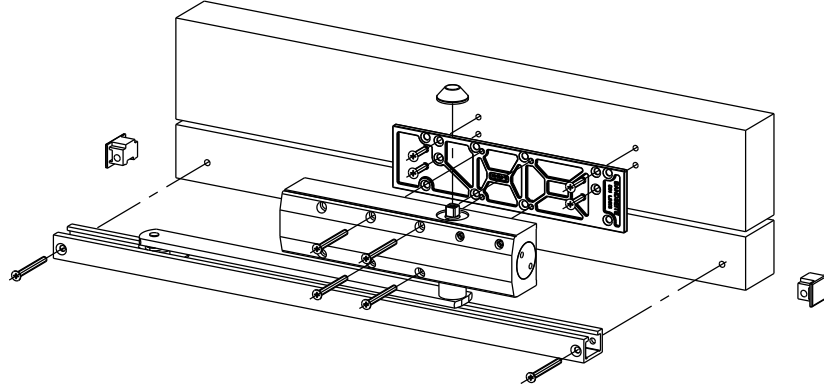

5

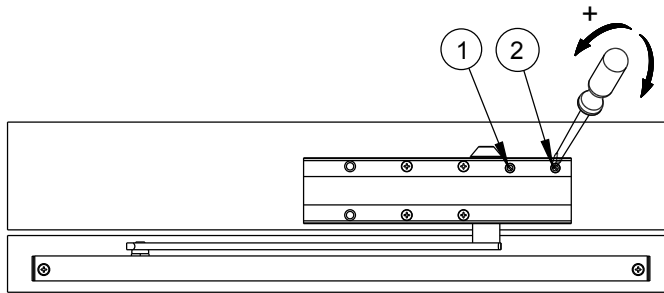


- ① Velocidad de cierre
Vitesse de fermeture
- ② Golpe final
À-coup final

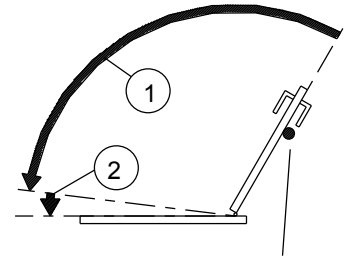

Utilizar un tope de puerta (no incluido), máx. 105°
Utiliser une butée de porte (non fourni), max. 105°

6

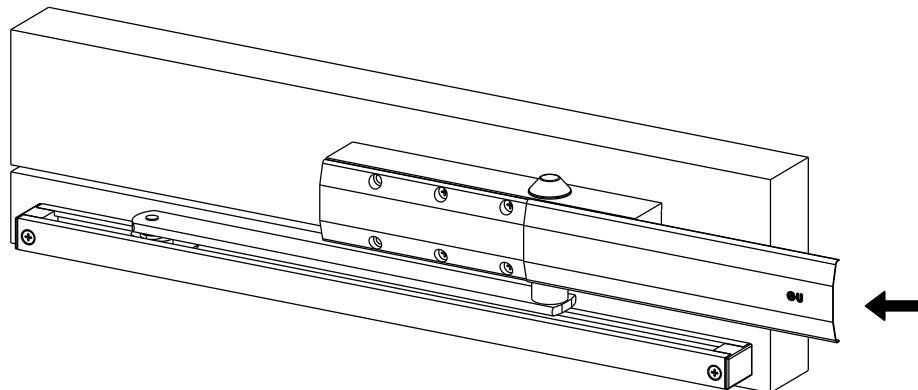

Description

OTS 633 montaje invertido lado contrario a bisagras, DIN izda. K-17521

OTS 633 montage inversé côté opposé aux paumelles, DIN gauche K-17521

Instrucciones de montaje
Notice de montage

Proprietary rights apply in accordance with ISO 16016.

EN

ES

FR

--

--



Release No.
--
Mod. No.
G33596

Replacement for --

Level

Ver.

Draft

Released

--

15.03.2017

Wi

Se

Scale

%

Modification

5

Drawing No.





0-44861-PL-0-ES

Size

4

Sheet



10/12

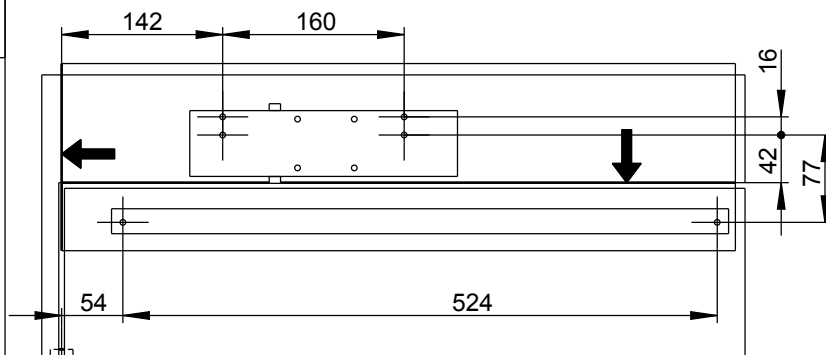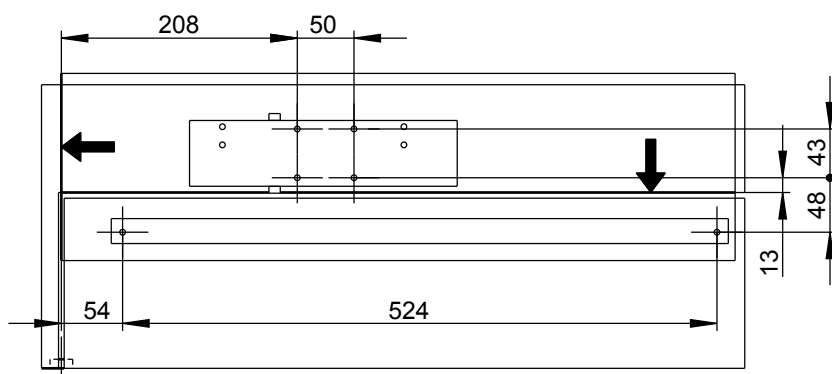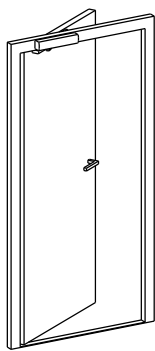

—K-17811 opcional
en option



—K-16547 opcional
en option

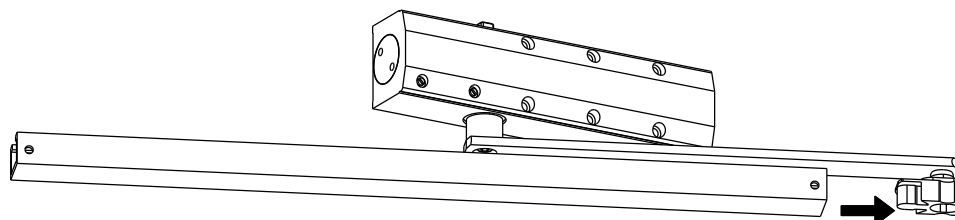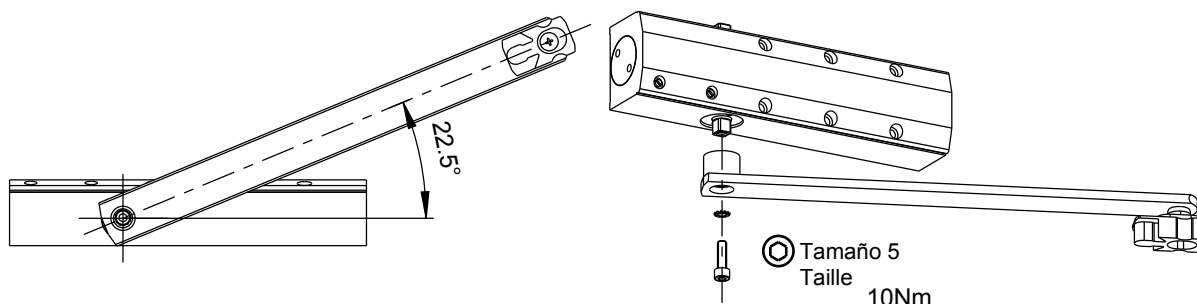

3

Description

OTS 633 montaje invertido lado contrario a bisagras, DIN dcha. K-17521

OTS 633 montage inversé côté opposé aux paumelles, DIN droite K-17521



Release No.

—

Mod. No.
G33596

Replacement for --

Level

Ver.

Draft

Released

—

15.03.2017

Wi

Se

Scale

%

Modification	
--------------	--

5

Drawing No.

0-44861-PL-0-ES


Size

4


Sheet

11/12


4a

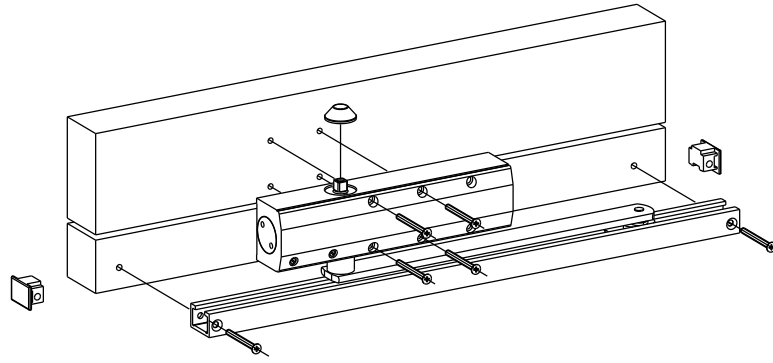


4b

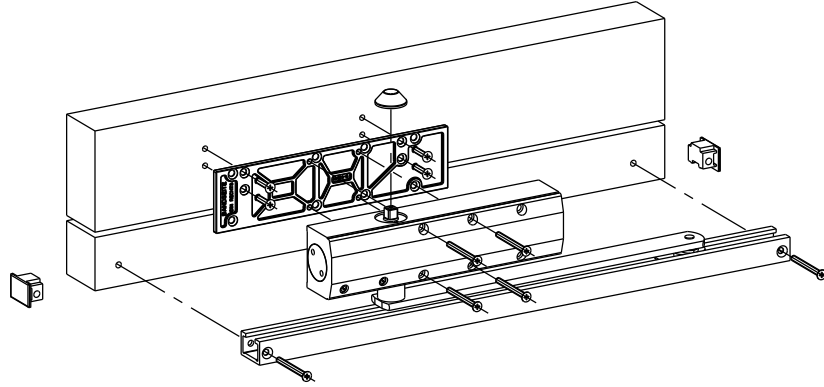

Proprietary rights apply in accordance with ISO 16016.

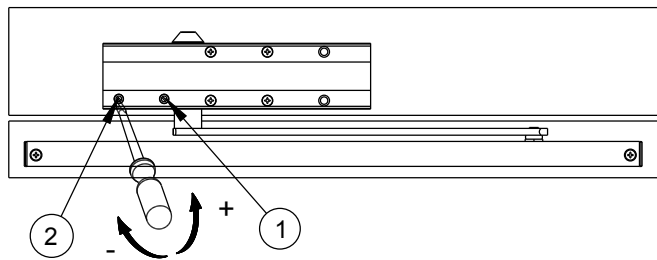

- 1 Velocidad de cierre
Vitesse de fermeture
- 2 Golpe final
À-coup final

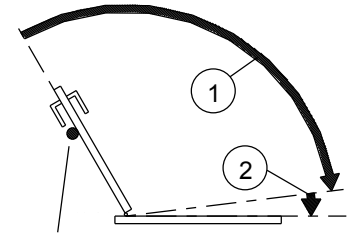

5

Utilizar un tope de puerta (no incluido), máx. 105°
Utiliser une butée de porte (non fourni), max. 105°

EN


ES

FR

--

--

6

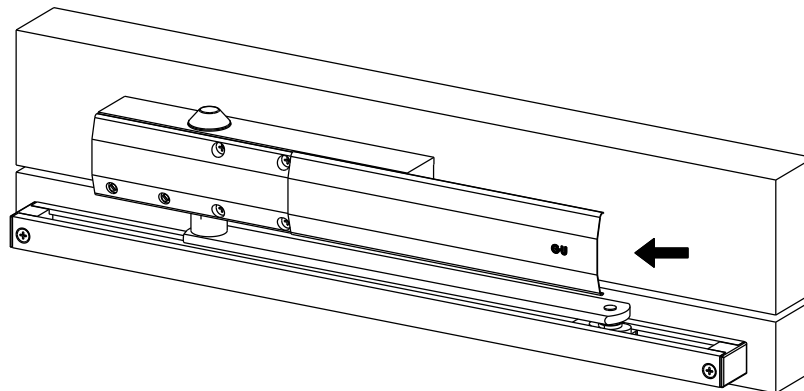

Description

OTS 633 montaje invertido lado contrario a bisagras, DIN dcha. K-17521

OTS 633 montage inversé côté opposé aux paumelles, DIN droite K-17521



Release No.
--
Mod. No.
G33596

Replacement for --

Level

Ver.

Draft

Released

--

15.03.2017

Wi

Se

Scale

%

Modification

5

Drawing No.

0-44861-PL-0-ES

Size

4

Sheet

12/12