


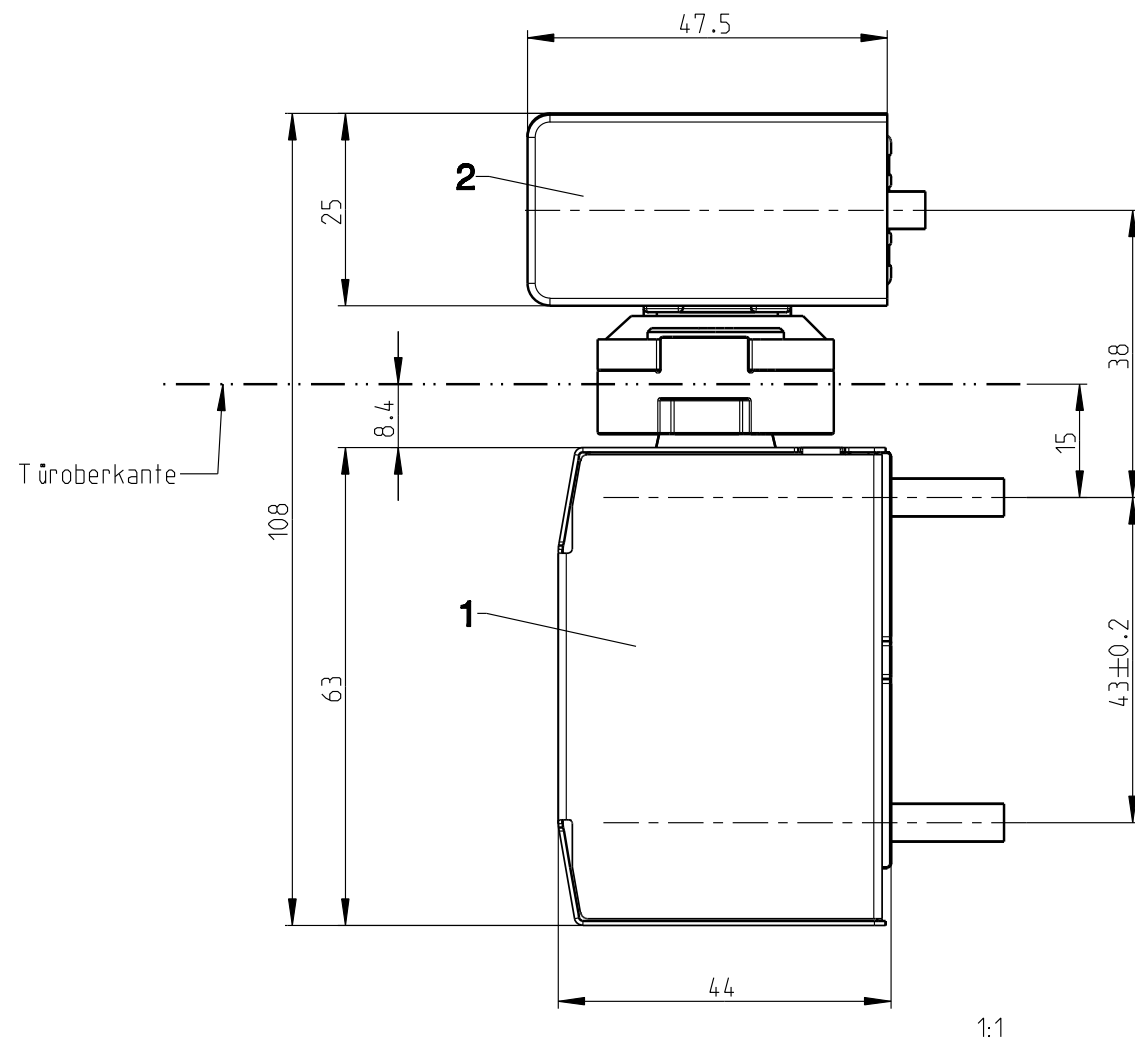


Gangfl ügel
DIN links gezeichnet
DIN rechts spiegelbildlich

Description

OTS 73x + GS SRI-OTS 73x
Normalmontage Bandseite
Profil: Neutral

	Release No.	Level	Released		Scale	Modification	Size
	--	Ver.	--	Wi	%	1	3
	Mod. No.	Draft	08.01.2015	Se		Drawing No.	Sheet
	G30136					0-47034-PH-0-0	1/4
	Replacement for --						

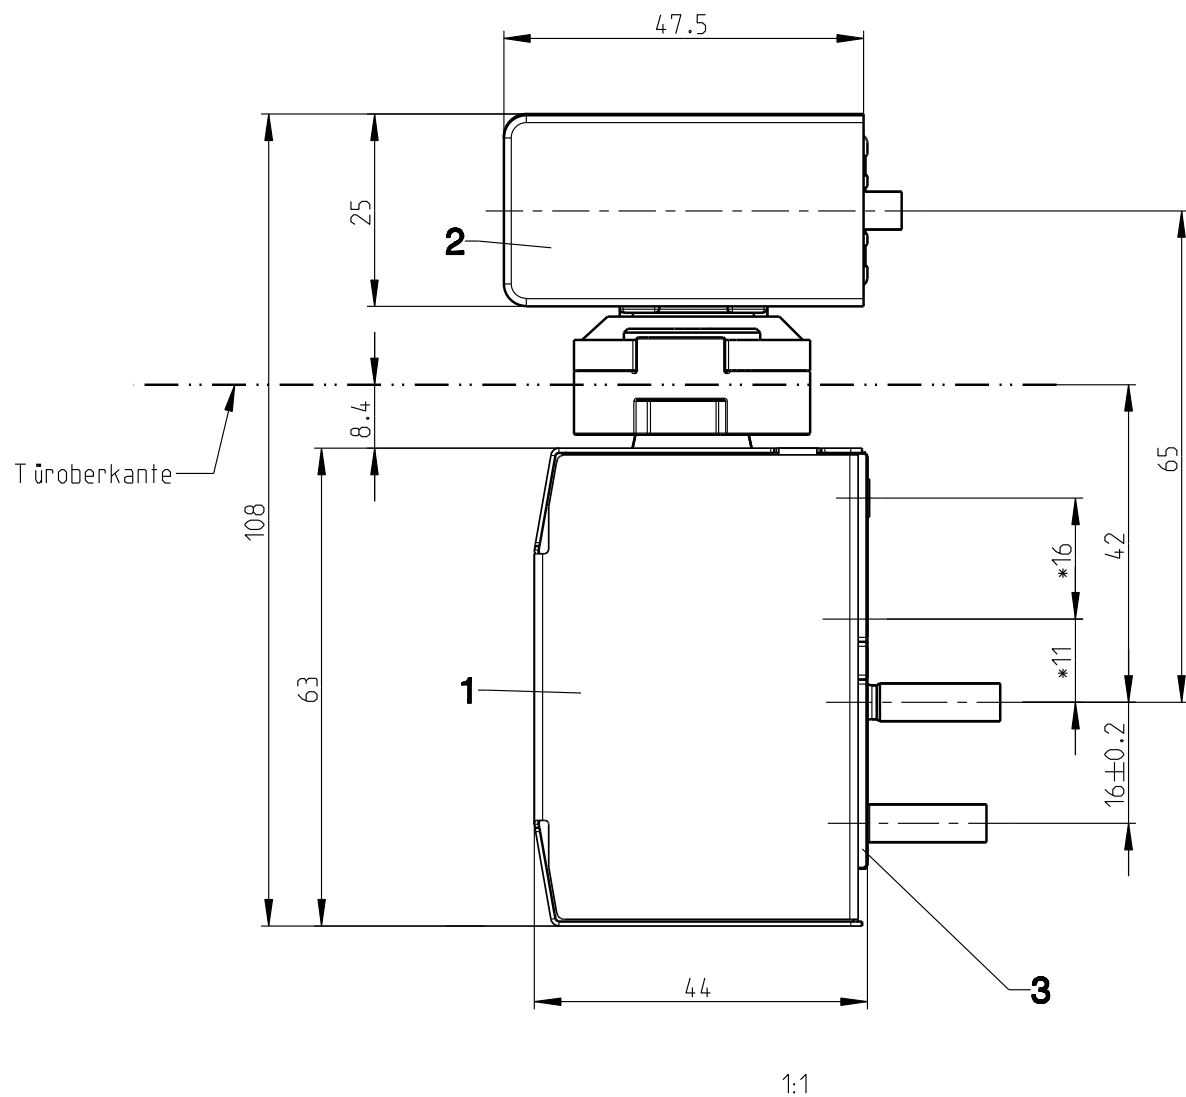


Gangflügel
DIN links gezeichnet
DIN rechts spiegelbildlich


Pos.	Benennung	Art.-Nr.	St.	Montageanl.
1	OTS 733 + AD	K-18496	2	0-46540
	OTS 735 + AD	K-18498		0-45969
	OTS 736 + AD	K-18500		
2	GS SRI-OTS 73x	K-18354	1	0-46527
3	Montageplatte MP	K-18280	2	
	Bohrlehre	K-18937		

OTS 73x + GS SRI-OTS 73x
Normalmontage Bandseite, mit Montageplatte
Profil: Neutral

	Release No. --	Level	Released		Scale %	Modification 1	Size 3
	Mod. No. G30136	Ver.	--	W i		Drawing No. 0-47034-PH-0-0	Sheet 2/4
		Draft	08.01.2015	Se			
	Replacement for --						

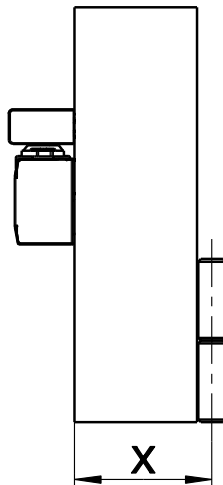

Maß X	Max. Türöffnungswinkel
70 mm	125 °
80 mm	121 °
90 mm	117 °
100 mm	113 °
110 mm	110 °

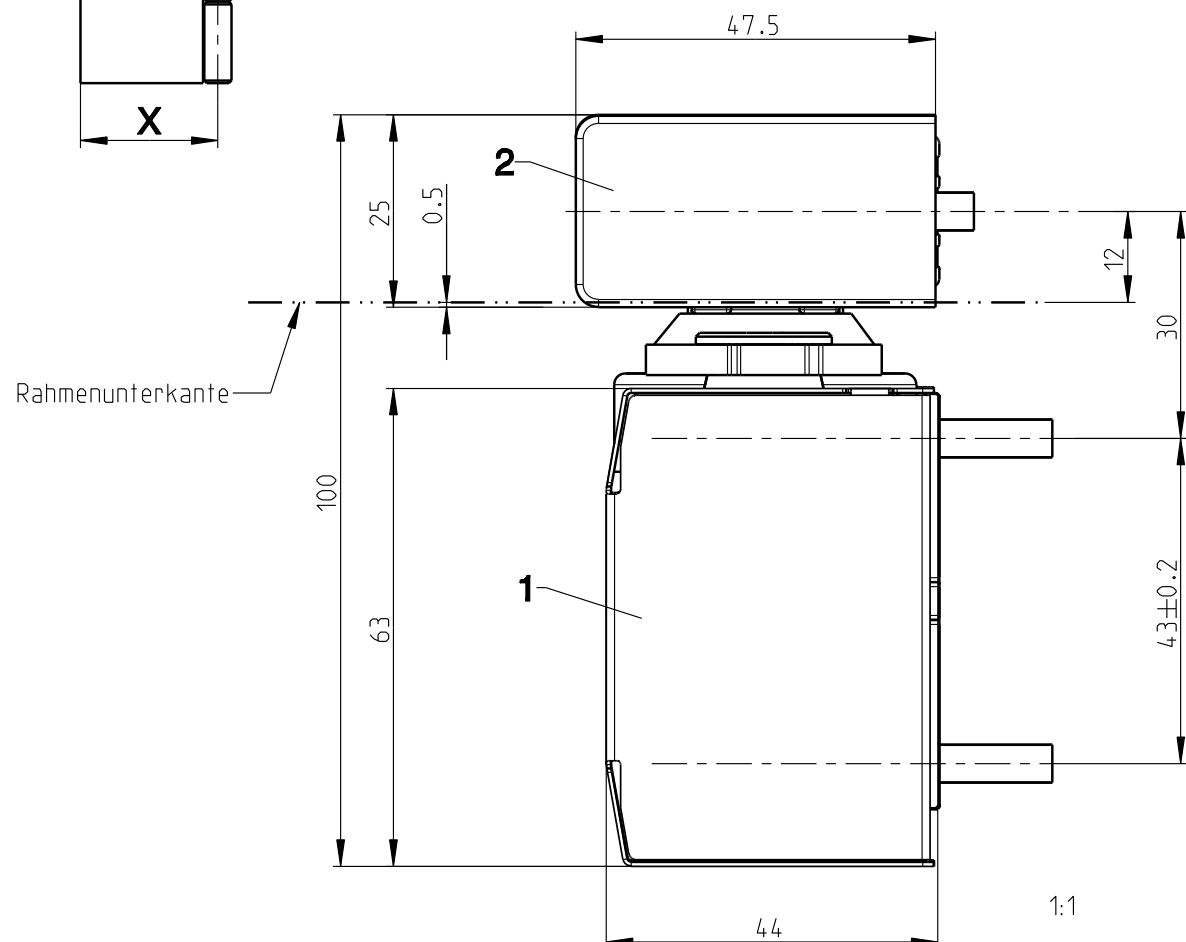


Gangflügel
DIN links gezeichnet
DIN rechts spiegelbildlich

Pos.	Benennung	Art.-Nr.	St.	Montageanl.
1	OTS 733 BG + AD	K-18497	2	0-46541
	OTS 735 BG + AD	K-18499		0-45979
	OTS 736 BG + AD	K-18501		
2	GS SRI-OTS 73x BG	K-18357	1	0-46538
	BohrLehre	K-18937		

OTS 73x BG + GS SRI-OTS 73x BG
Normalmontage Bandgegenseite
Profil: Neutral

	Release No. --	Level	Released		Scale %	Modification 1	Size 3
	Mod. No. G30136	Ver.	--	Wi			
		Draft	08.01.2015	Se		Drawing No.	Sheet
	Replacement for --					0-47034-PH-0-0	

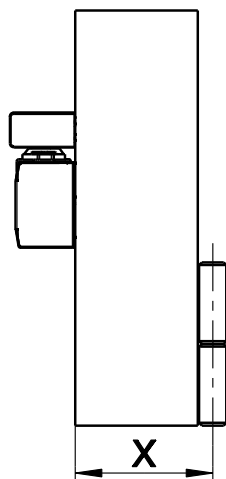

Technical drawing of a rectangular device, likely a component of a system, showing dimensions and labels.

The drawing includes the following dimensions and labels:

- Overall Width:** 47.5
- Overall Height:** 100
- Top Section Height:** 25
- Top Section Thickness:** 0.5
- Bottom Section Height:** 63
- Bottom Section Width:** 44
- Right Section Height:** 12
- Right Section Width:** 16
- Right Section Thickness:** *11
- Right Section Width (Bottom):** 16 ± 0.2
- Right Section Thickness (Bottom):** *16
- Label 1:** Points to the main body of the device.
- Label 2:** Points to the top section of the device.
- Label 3:** Points to the bottom right corner of the device.
- Label X:** Points to the width of the top section.
- Label Rahmenunterkante:** Points to the bottom edge of the frame.
- Scale:** 1:1



Gangflügel
DIN links gezeichnet
DIN rechts spiegelbildlich

Description

OTS 73x BG + GS SRI-OTS 73x BG
Normalmontage Bandgegenseite, mit Montageplatte
Profil: Neutral

	Release No.	Level	Released		Scale	Modification	Size
	--	Ver.	--	W i	%	1	3
	Mod. No.	Draft	08.01.2015	Se		Drawing No.	Sheet
	Replacement for --					0-47034-PH-0-0	4 / 4

EN
--
--
--
--

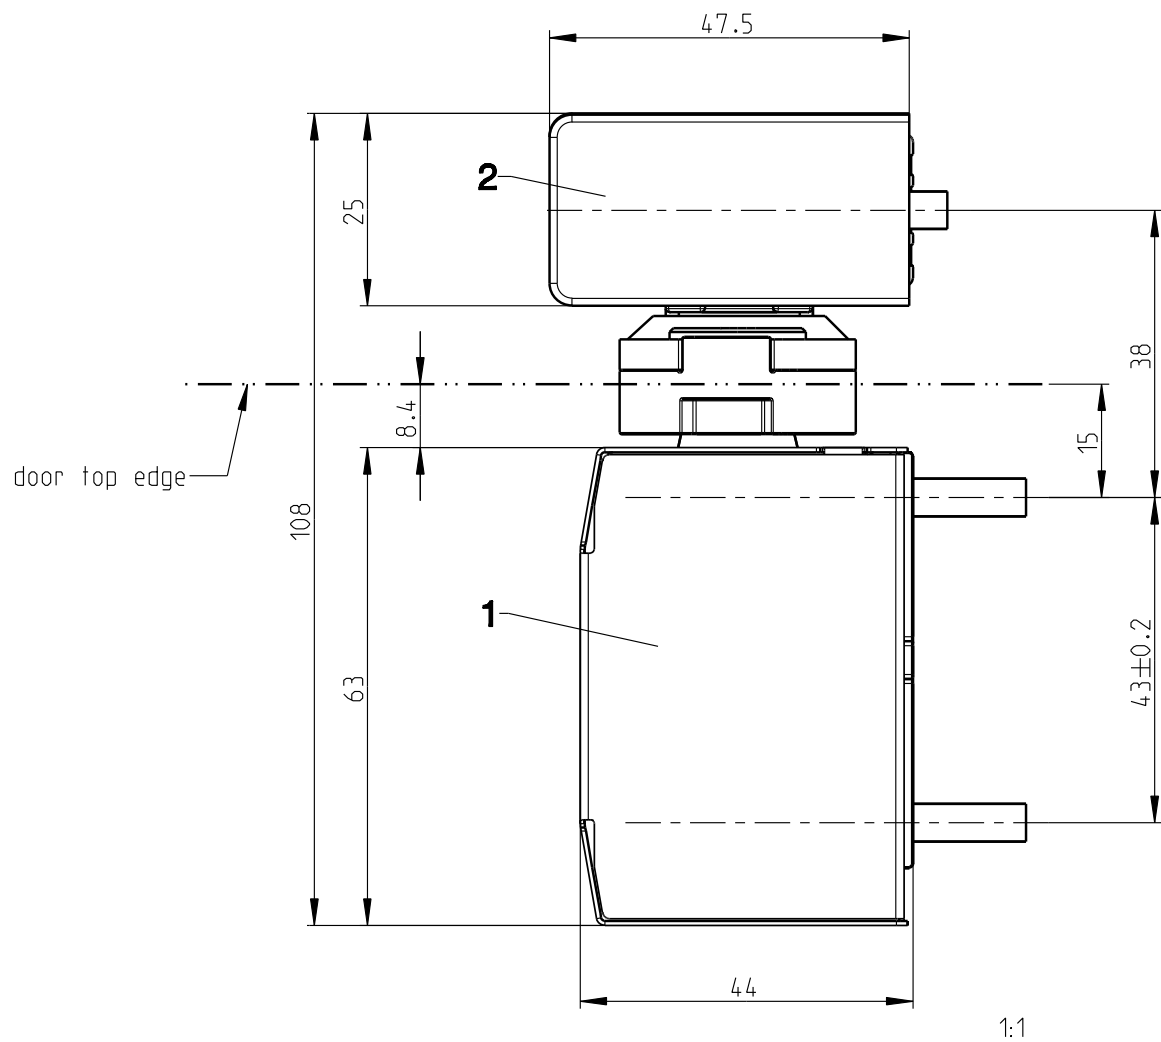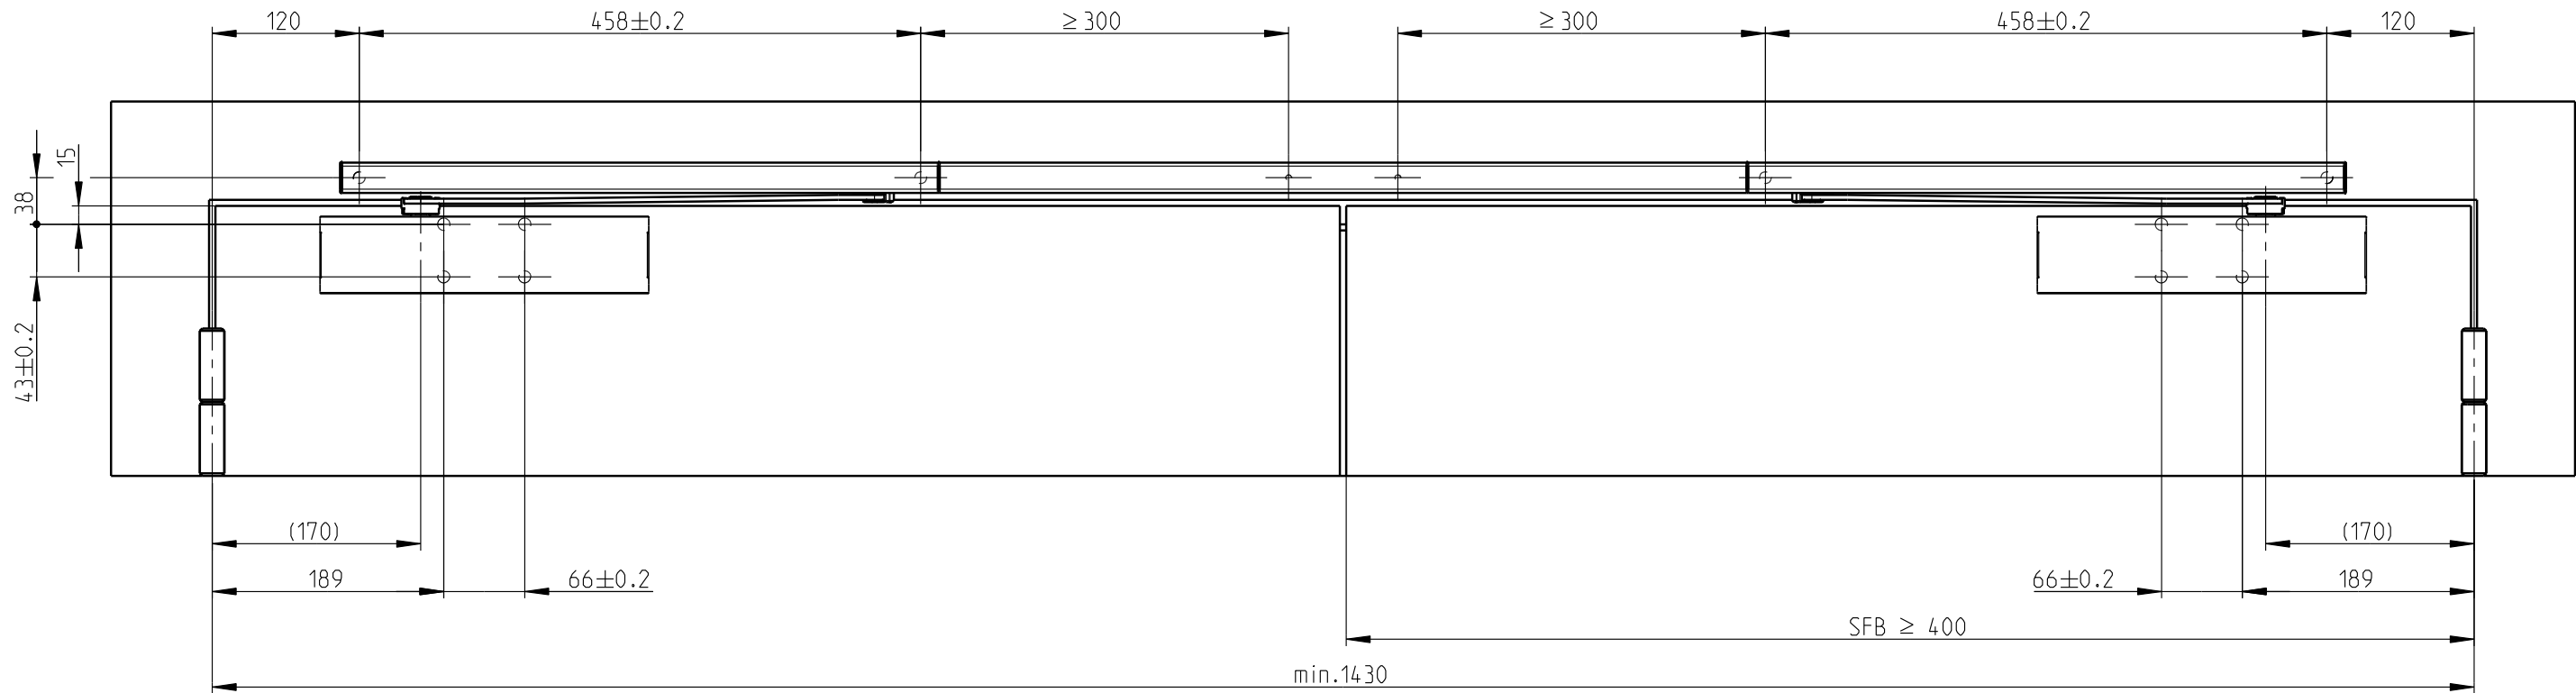

Notice:
The installer is responsible for the secure fastening of the door closer. If mounted on fire doors, the appropriate directives and approvals must be observed.



Active leaf
DIN lh is illustrated
DIN rh laterally reversed

Item	Description	Art.-no.	Qty.	Assembly inst.
1	OTS 733 + cover	K-18496	2	0-46540
	OTS 735 + cover	K-18498		0-45969
	OTS 736 + cover	K-18500		
2	GS SRI-OTS 73x	K-18354	1	0-46527
	Drilling jig	K-18937		

Description

OTS 73x + GS SRI-OTS 73x
Standard mounting on hinge side
Profile: neutral

	Release No.	Level	Released		Scale	Modification	Size
	--				%	1	3
	Mod. No.	Ver.	--	W i			
	G30136	Draft	08.01.2015	Se			
	Replacement for --						Drawing No.
						0-47034-PH-0-EN	1/4

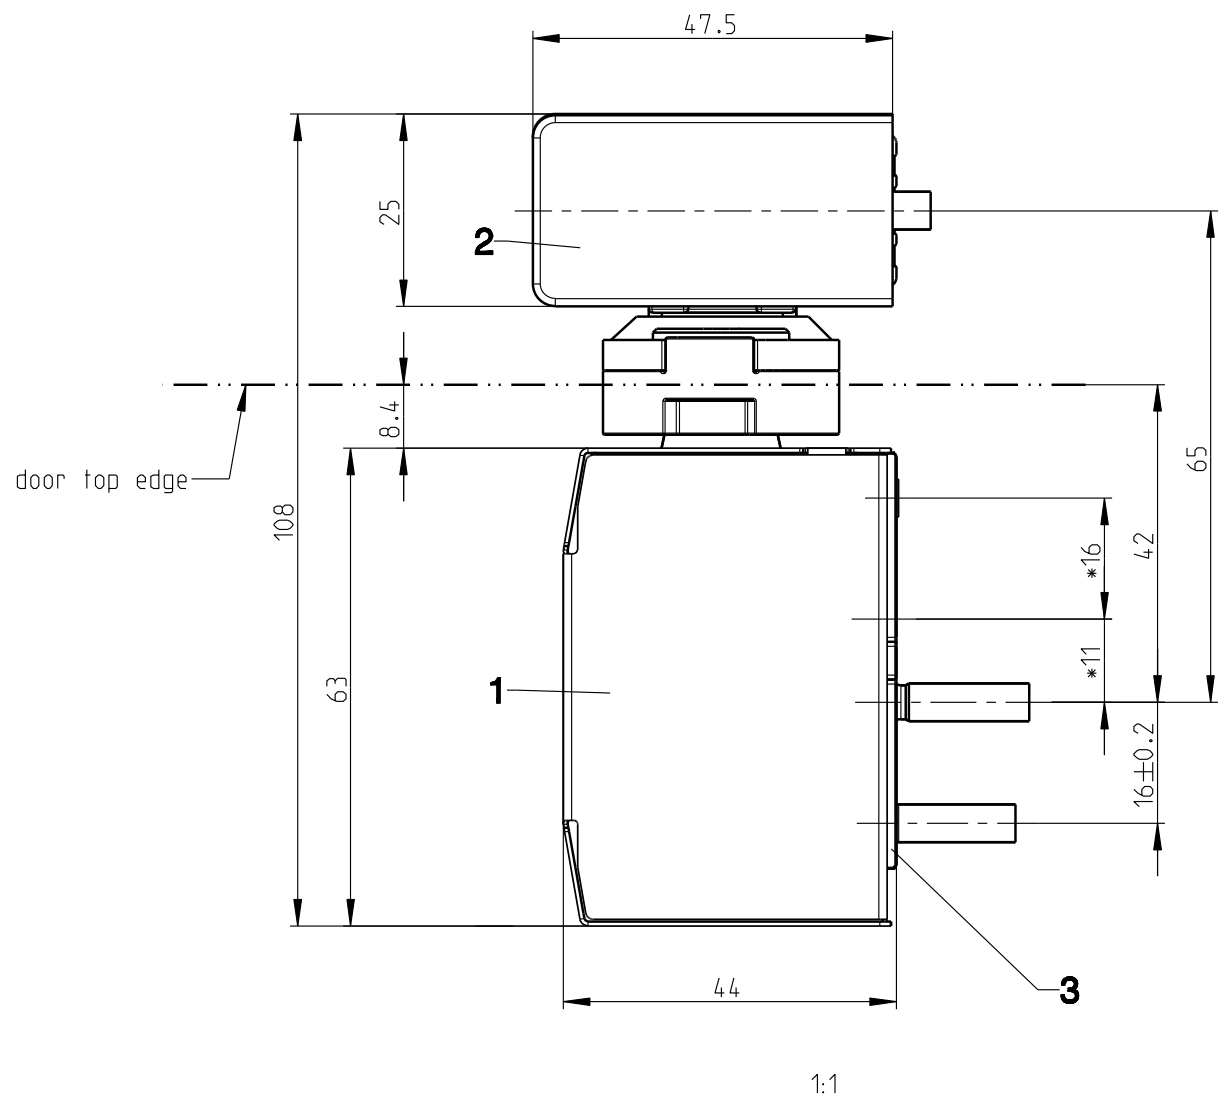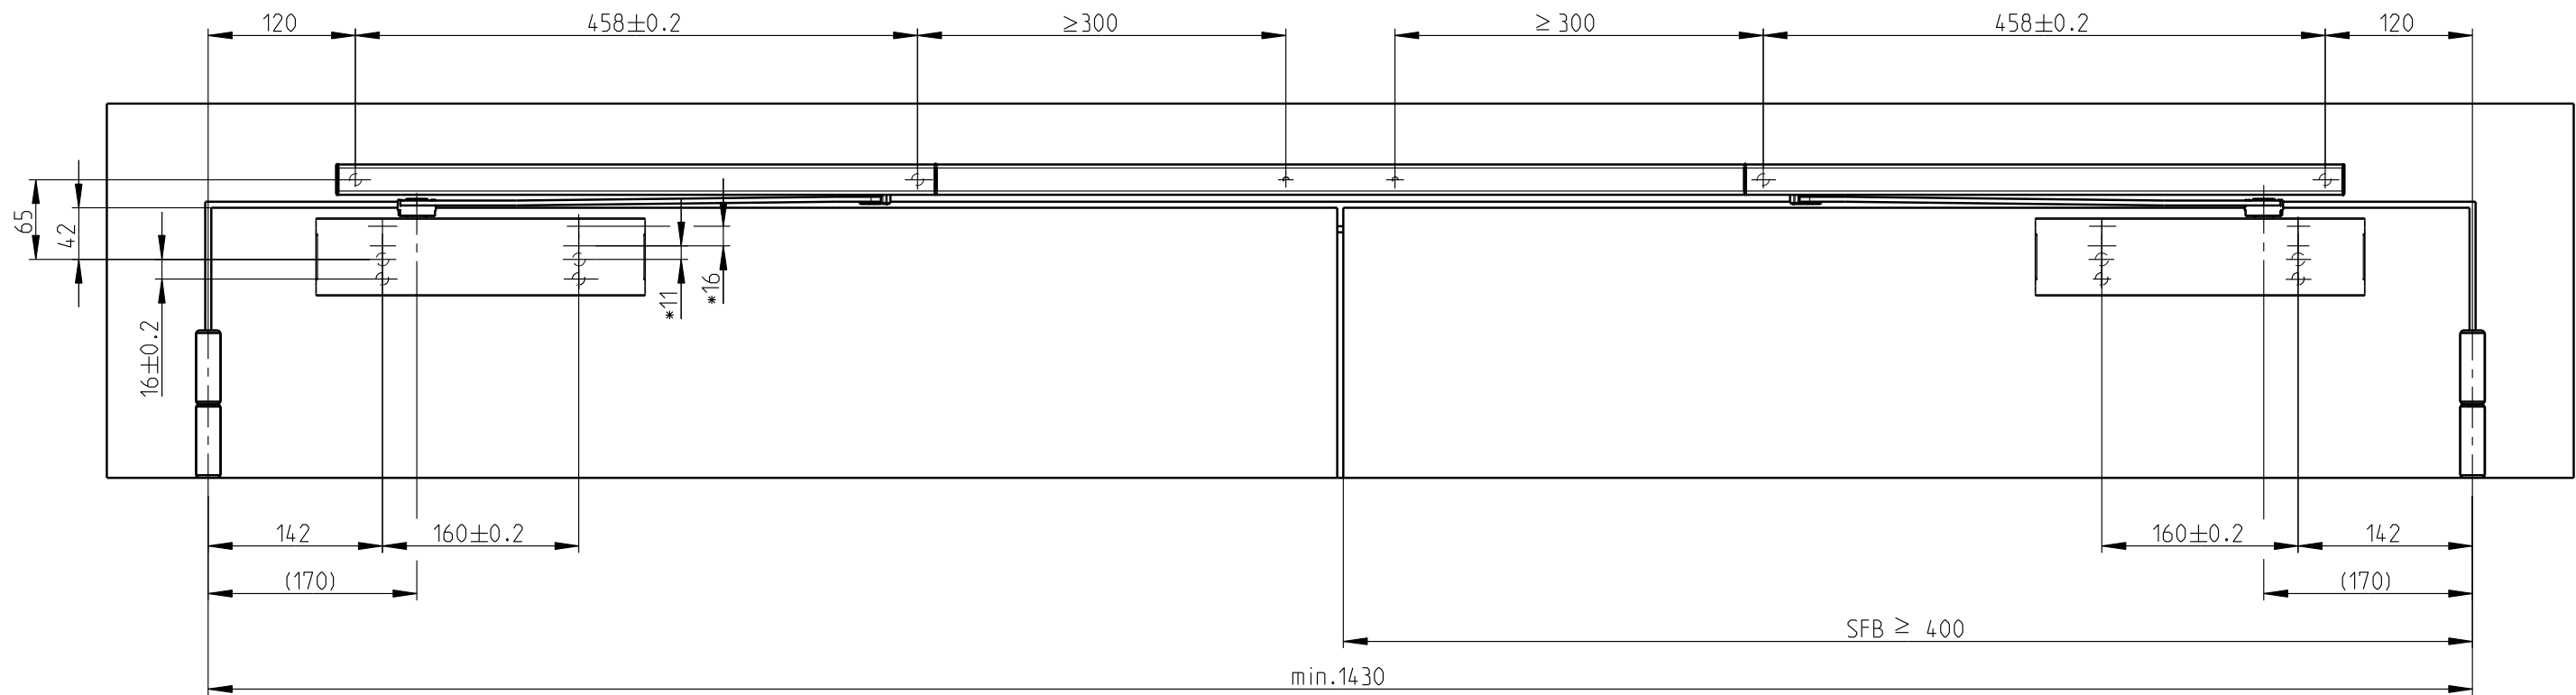


Indication:
* alternative fixing points

Notice:
The installer is responsible for the secure fastening of the door closer. If mounted on fire doors, the appropriate directives and approvals must be observed.

Active leaf
DIN lh is illustrated
DIN rh laterally reversed

Item	Description	Art.-no.	Qty.	Assembly inst.
1	OTS 733 + cover	K-18496	2	0-46540
	OTS 735 + cover	K-18498		0-45969
	OTS 736 + cover	K-18500		
2	GS SRI-OTS 73x	K-18354	1	0-46527
3	Mounting plate MP	K-18280	2	
	Drilling jig	K-18937		

Description						
OTS 73x + GS SRI-OTS 73x Standard mounting on hinge side, with mounting plate Profile: neutral						
GU	Release No.	Level	Released		Scale	Size
	--	Ver.	--	W i	%	3
	Mod. No. G30136	Draft	08.01.2015	Se	1	Sheet
	Replacement for --				Drawing No. 0-47034-PH-0-EN	2/4

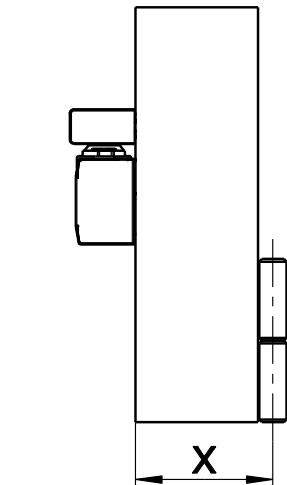

Technical drawing of a rectangular frame assembly, showing two views: a front view (labeled 1) and a side view (labeled 2).

Dimensions:

- Overall width: 47.5
- Overall height: 100
- Height of the lower section (1): 63
- Height of the upper section (2): 25
- Width of the upper section (2): 44
- Width of the lower section (1): 43 ± 0.2
- Thickness of the upper section (2): 0.5
- Thickness of the lower section (1): 12
- Distance from the frame lower edge to the top of the upper section (2): 25
- Distance from the frame lower edge to the bottom of the lower section (1): 63
- Distance from the frame lower edge to the top of the lower section (1): 100

Labels:

- 1: Front view of the lower section.
- 2: Side view of the upper section.
- frame lower edge: Indicated by a dashed line and an arrow pointing to the bottom edge of the frame.



Scale: 1:1

Active leaf
DIN lh is illustrated
DIN rh laterally reversed


Description

OTS 73x BG + GS SRI-OTS 73x BG
Standard mounting opposite to hinge side
Profile: neutral

	Release No.	Level	Released		Scale	Modification	Size
	--	Ver.	--	Wi	%	1	3
	Mod. No. G30136	Draft	08.01.2015	Se		Drawing No.	Sheet
	Replacement for --						0-47034-PH-0-EN

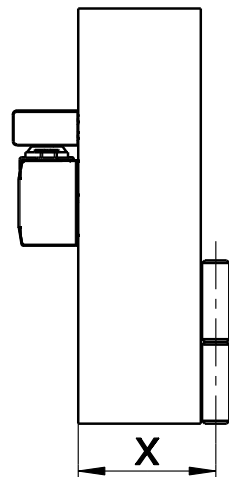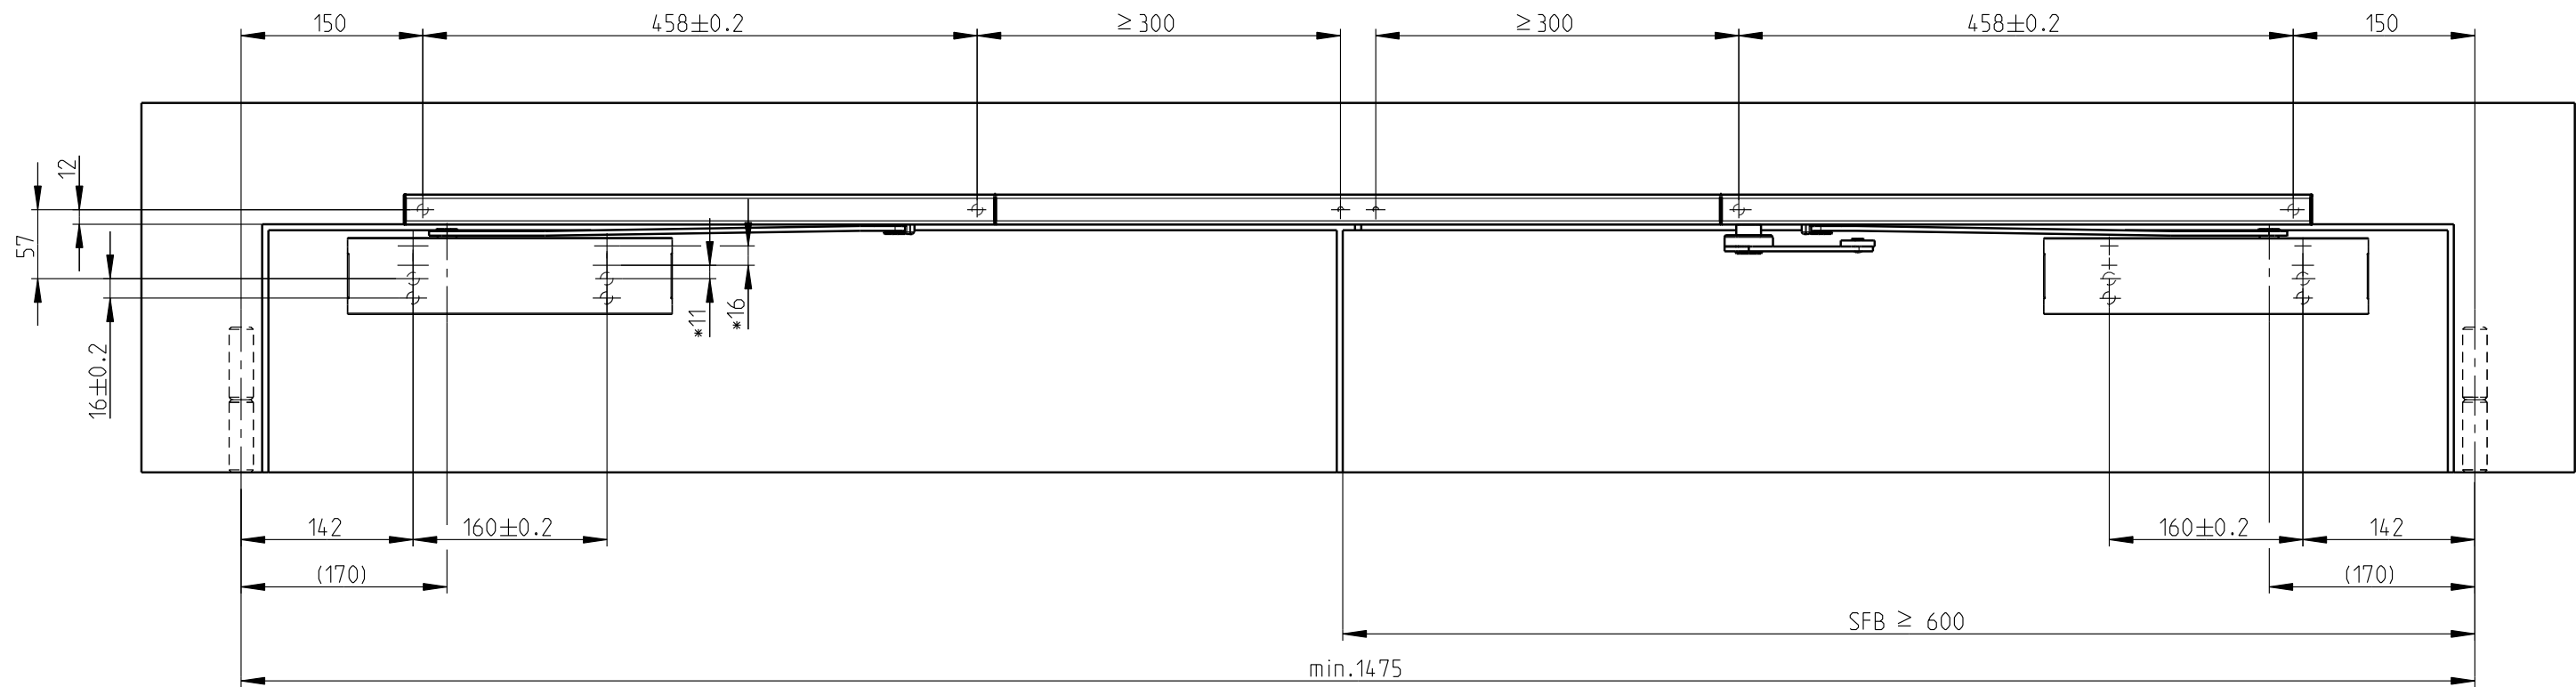

Dimension X	Door opening angle max.
70 mm	125 °
80 mm	121 °
90 mm	117 °
100 mm	113 °
110 mm	110 °

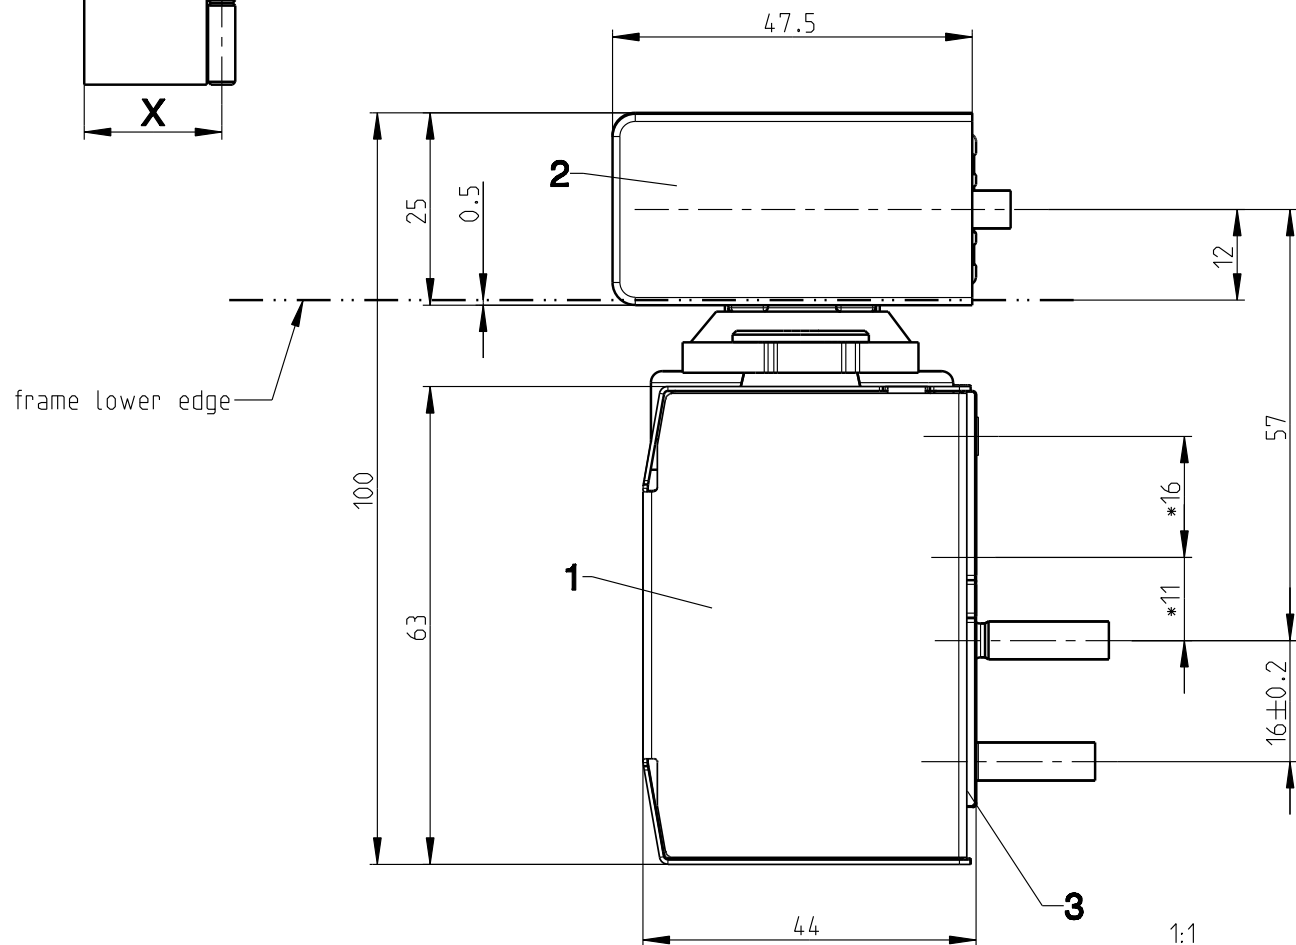

Indication:
Use door stop for max. door opening angle.
* alternative fixing points.

Notice:
The installer is responsible for the secure fastening of the door closer. If mounted on fire doors, the appropriate directives and approvals must be observed.

Active leaf
DIN lh is illustrated
DIN rh laterally reversed

Item	Description	Art.-no.	Qty.	Assembly inst.
1	OTS 733 BG + cover	K-18497	2	0-46541
	OTS 735 BG + cover	K-18499		0-45979
	OTS 736 BG + cover	K-18501		
2	GS SRI-OTS 73x BG	K-18357	1	0-46538
3	Mounting plate MP	K-18280	2	
	Drillling jig	K-18937		

Description

OTS 73x BG + GS SRI-OTS 73x BG
Standard mounting opposite to hinge side, with mounting plate
Profile: neutral

GU	Release No. --	Level	Released		Scale %	Modification		Size
	Mod. No. G30136	Ver.	--	W i		1	Drawing No. 0-47034-PH-0-EN	3
	Replacement for --		Draft	08.01.2015	Se			Sheet 4 / 4