
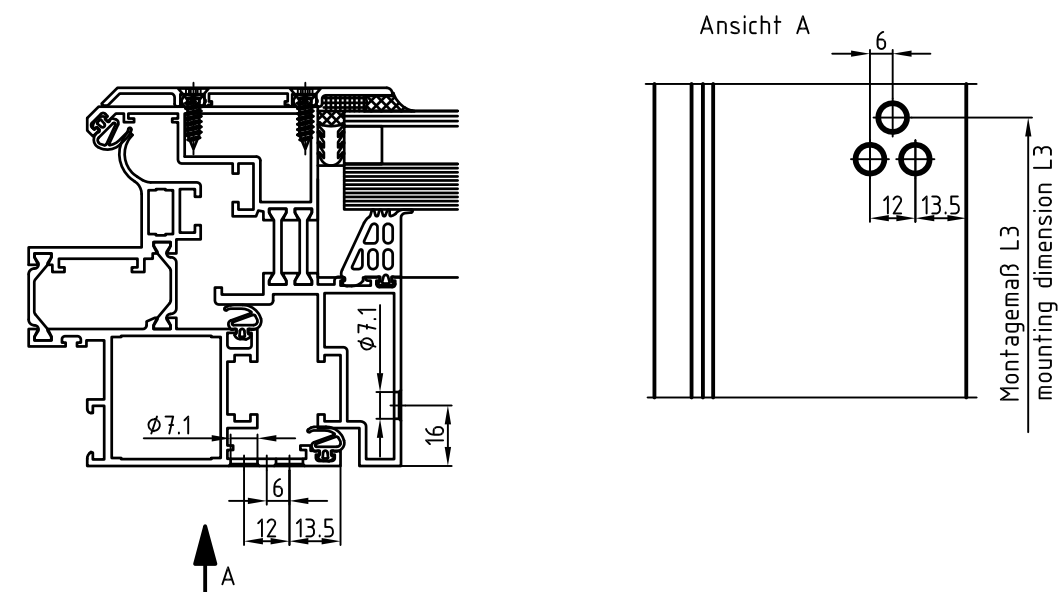
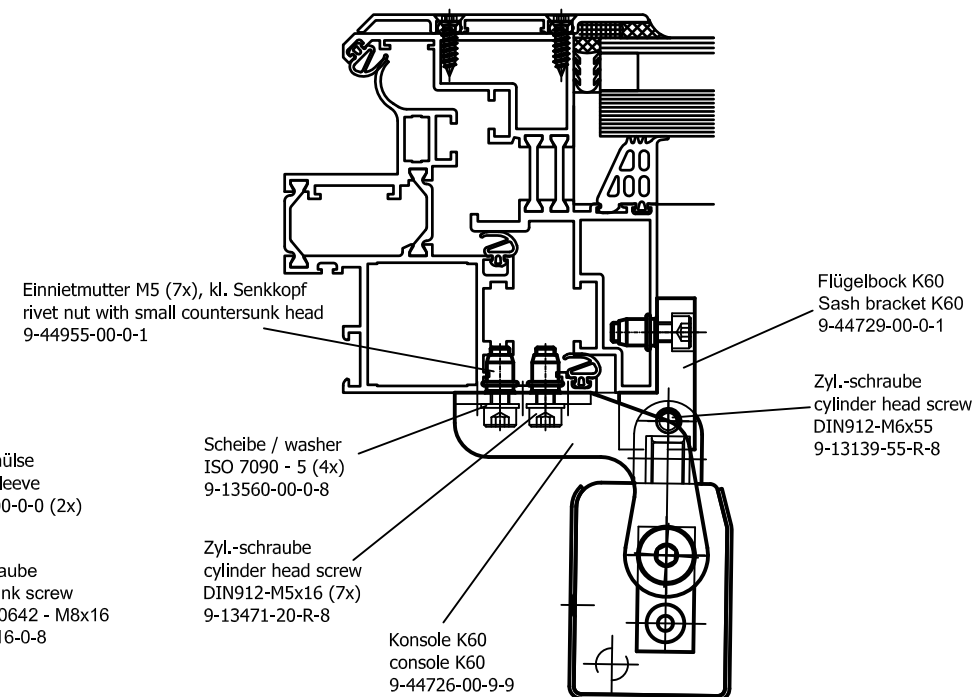
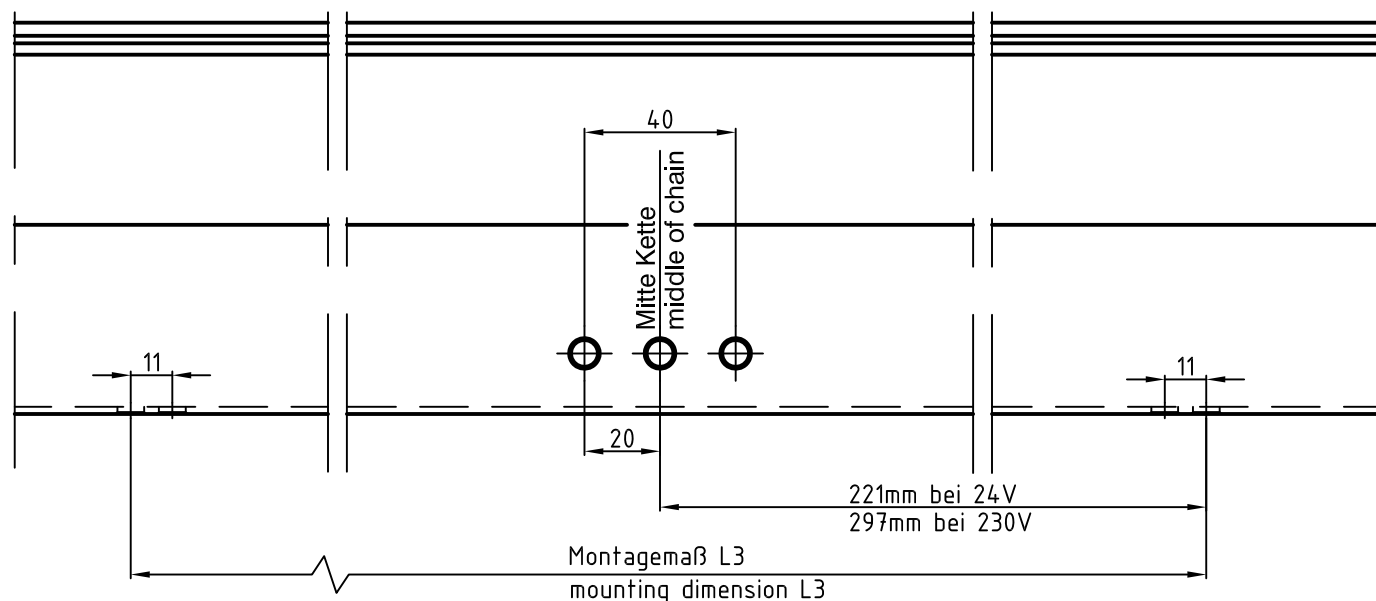


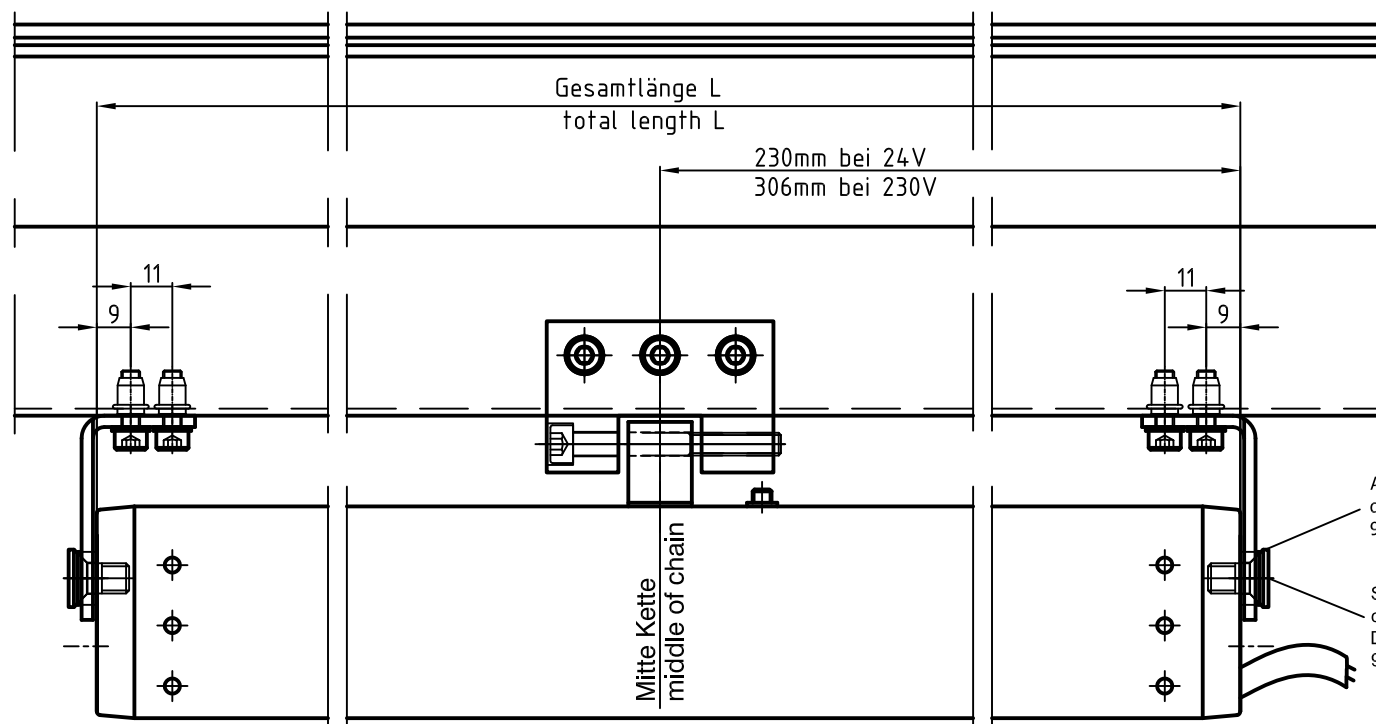

Bezeichnung / description	Artikel-Nr. / material number	Hub / stroke (mm)	Montagmaß / mounting dim. L3 (mm)	Gesamtlänge / total length L (mm)	Flügelhöhe / sash height min. (mm)	max. Schub-/Zugkraft shear-/tractive force
Eltral K60, 24V	K-17648-25-0-00	250	443	461	350	600N / 600N
Eltral K60, 24V, Synchro	K-17583-25-0-00		443	461		
Eltral K60, 230V	K-17649-25-0-00		509	537		
Eltral K60, 24V	K-17648-40-0-00	400	509	537	900	600N / 600N
Eltral K60, 24V, Synchro	K-17583-40-0-00		509	537		
Eltral K60, 230V	K-17649-40-0-00		595	613		
Eltral K60, 24V	K-17648-50-0-00	500	595	639	1100	400N / 600N
Eltral K60, 24V	K-17648-60-0-00	600	595	639	1400	300N / 600N
Eltral K60, 24V, Synchro	K-17583-60-0-00		595	639		
Eltral K60, 24V	K-17648-80-0-00	800	722	740	1900	200N / 600N
Eltral K60, 24V	K-17648-01-0-00	1000	824	842	2300	100N / 600N

Diese Montageanleitung wendet sich an ausgebildetes Fachpersonal, Grundlegende Arbeitsschritte werden nicht näher erläutert.

Achtung: Alle Maße sind gem. VOB am Bau zu prüfen und ggf. anzupassen !

Die Montage- und Betriebsanleitung ist Bestandteil dieser Einbauzeichnung und ist daher zu beachten

This assembly instructions apply to trained personnel, basic working steps are not explained

Attention: All dimensions are to be checked at the building and if necessary adapted!

The assembly and operating instruction are a component of this installation drawing and are from there to be considered

Description Montageanleitung ELTRAL K60, Dachfenster, Wicona mounting instruction ELTRAL K60, roof window, Wicona Bef.-Garn. / mounting set K-17609-00-0-00							
 	Release No. 7641	Level	release		Scale	Modification neu erstellt	Size 3
	Mod. No. G21703	Ver.	--	--	1:2		
		Draft	26.09.2008	FI			
		Replacement for --					Drawing No. 0-44947-IE