

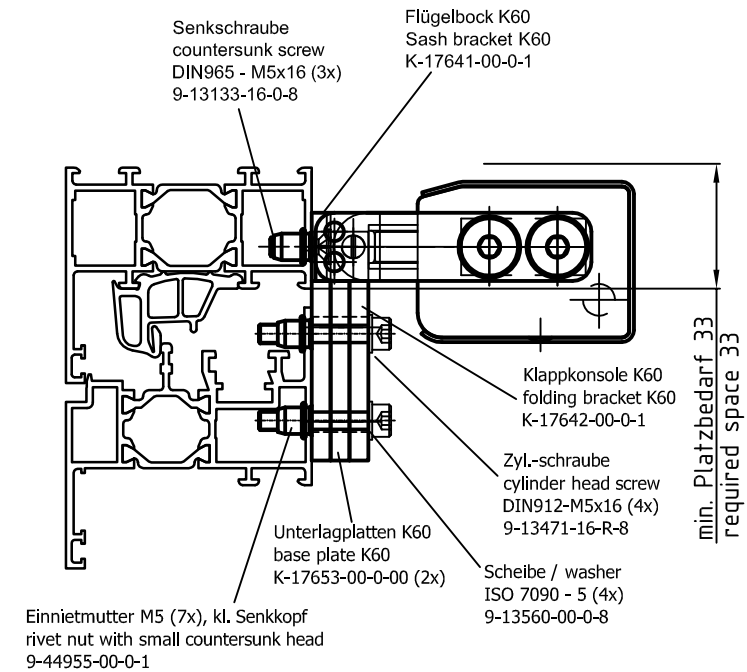
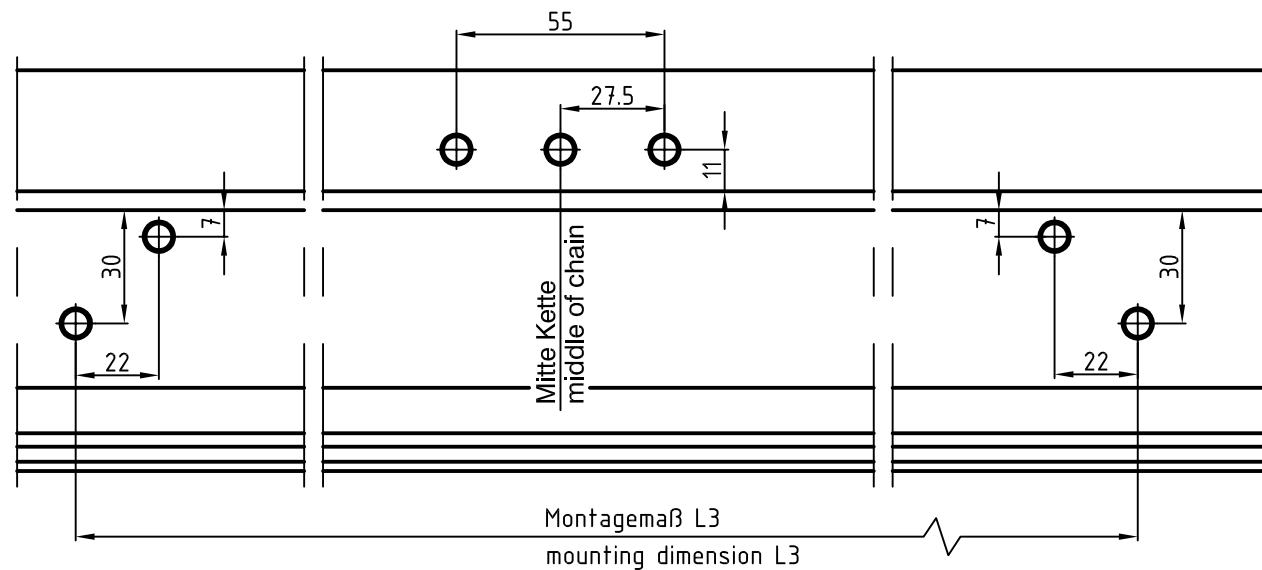


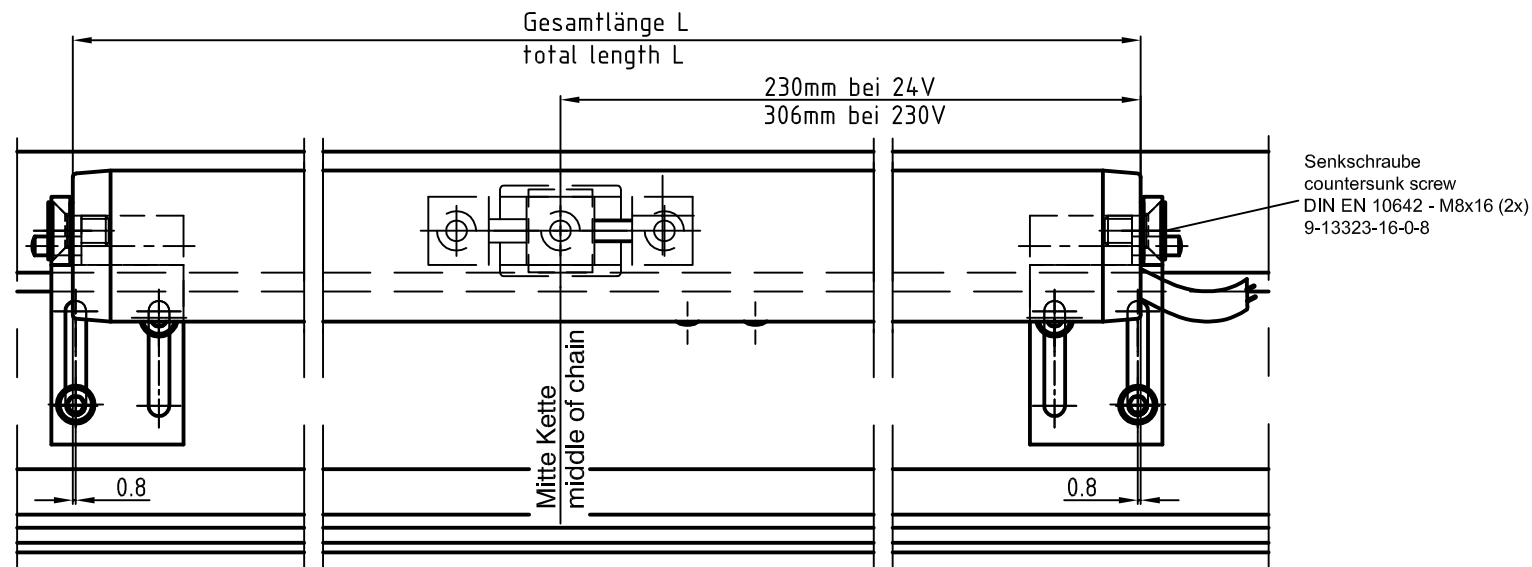

Unterlagplatten K60 sind separat zu bestellen
base plate K60 are order separately

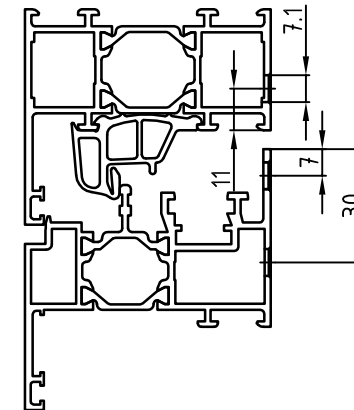

Achtung: Bei Kippfenster Sicherheitschere einbauen!
Attention: Insert security stay with tilt window!

Diese Montageanleitung wendet sich an ausgebildetes Fachpersonal, Grundlegende Arbeitsschritte werden nicht näher erläutert

This assembly instructions apply to trained personnel, basic working steps are not explained

Achtung: Alle Maße sind gem. VOB am Bau zu prüfen und ggf. anzupassen !

Attention: All dimensions are to be checked at the building and if necessary adapted!

Die Montage- und Betriebsanleitung ist Bestandteil dieser Einbauzeichnung und ist daher zu beachten
The assembly and operating instruction are a component of this installation drawing and are from there to be considered

Description							
Einbauzeichnung ELTRAL K60, Kippfenster, Flügelmontage, Wicona, flächenbündig, Klappkonsole installation drawing ELTRAL K60, tilt window, sash mounting, Wicona, flush-closing, folding bracket Bef.-Garn. / mounting set K-17596-00-0-00							
 	Mod. No. G22420	Level	released		Scale	Modification	Size
		Ver.	--	--	1:2	1	3
		Draft	28.11.2008	FI		Drawing No.	Sheet
	Replacement for --						0-45190-IE

Bezeichnung / description	Artikel-Nr. / material number	Hub / stroke (mm)	Montagemaß / mounting dim. L3 (mm)	Gesamtlänge / total length L (mm)	Flügelhöhe / sash height min. (mm)	max. Schub-/Zugkraft shear-/tractive force
Eltral K60, 24V	K-17648-25-0-00	250	459	461	400	600N / 600N
Eltral K60, 24V, Synchro	K-17583-25-0-00		459	461		
Eltral K60, 230V	K-17649-25-0-00		535	537		
Eltral K60, 24V	K-17648-40-0-00	400	535	537	600	600N / 600N
Eltral K60, 24V, Synchro	K-17583-40-0-00		535	537		
Eltral K60, 230V	K-17649-40-0-00		611	613		
Eltral K60, 24V	K-17648-50-0-00	500	637	639	800	400N / 600N
Eltral K60, 24V	K-17648-60-0-00	600	637	639	1000	300N / 600N
Eltral K60, 24V, Synchro	K-17583-60-0-00		637	639		
Eltral K60, 24V	K-17648-80-0-00	800	738	740	1200	200N / 600N
Eltral K60, 24V	K-17648-01-0-00	1000	840	842	1500	100N / 600N